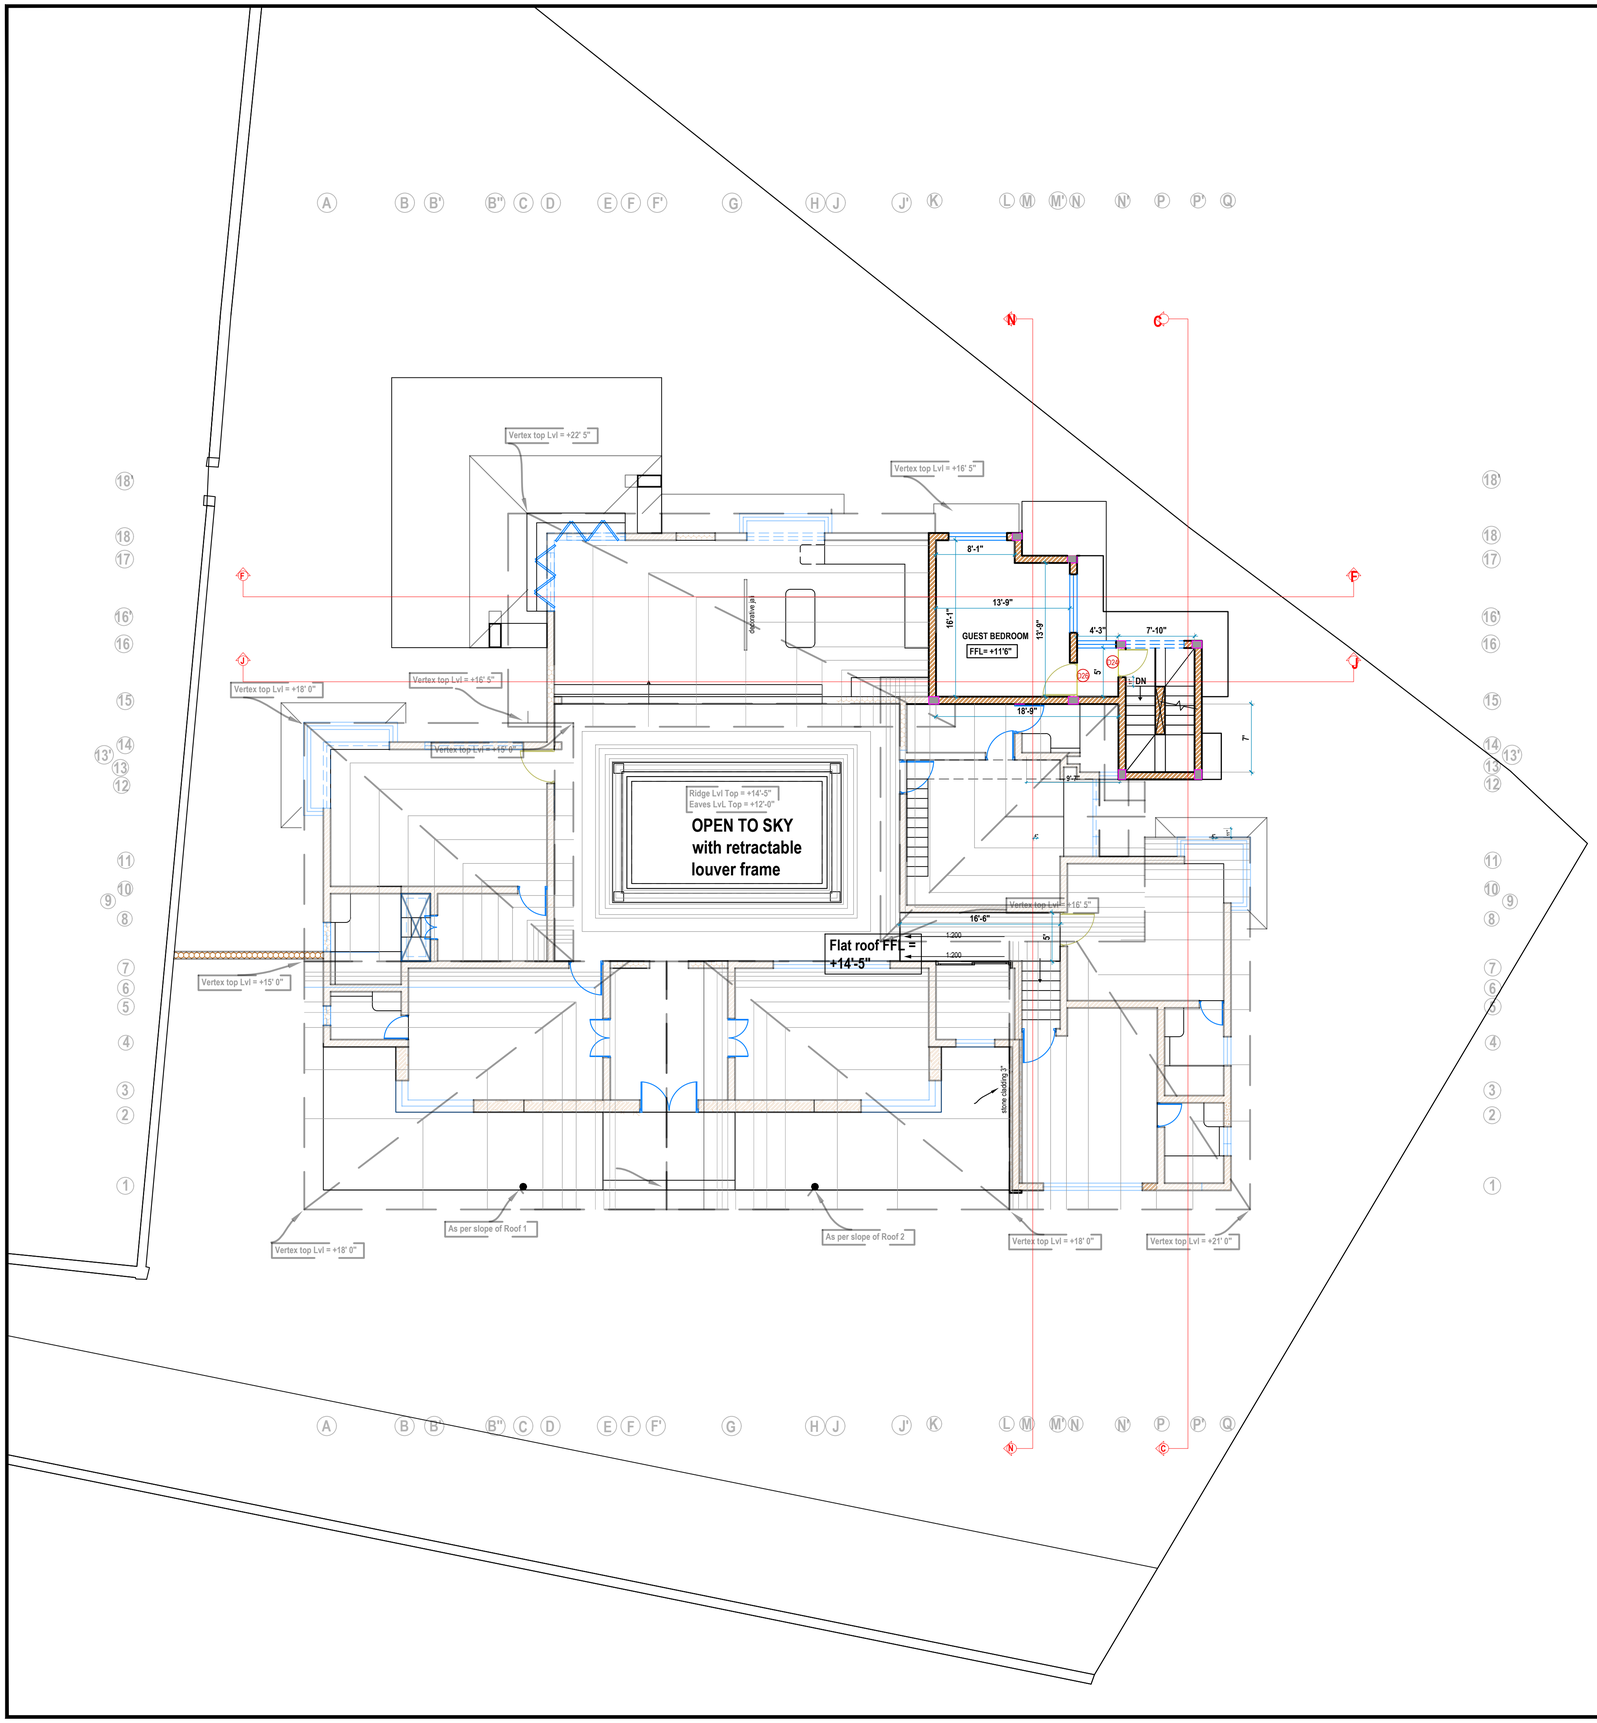


D/W/V CODE	OPENING SIZE (W x H)	SILL HT. from FFL	LINTEL HT. from FFL	LOCATION REFERENCE	
D1	6' x 8'	-	Bottom of Tie Beam	Main Door	
D2	4' x 8'	-	Bottom of Tie Beam	Foyer towards Formal Dining	
D4	4' x 8'	-	Bottom of Tie Beam	Foyer towards Formal Living	
D5	4' x 8'	-	Bottom of Tie Beam	Formal Dining	CANCELLED
D9	2'6" x 8'	-	Bottom of Tie Beam	MBR toilet	
D3	2'6" x 8'	-	Bottom of Tie Beam	Formal Dining Powder Room	
D7	2'6" x 8'	-	Bottom of Tie Beam	MBR Toilet	CANCELLED
D16	2'6" x 8'6"	-	Bottom of Tie Beam	PBR Toilet	
D18	2'6" x 8'	-	Bottom of Tie Beam	GBR Toilet	
D8	3' x 8'	-	Bottom of Tie Beam	MBR walk in wardrobe entry	
D10	3' x 8'	-	Bottom of Tie Beam	Wet Kitchen entry	
D11	3' x 7'6"	-	Bottom of Tie Beam	Prewood lover	CANCELLED
D13	3' x 8'	-	Bottom of Tie Beam	CBR Walk in Wardrobe	
D14	3' x 7'	-	Bottom of Tie Beam	CBR toilet	
D21	2'-6" x 7'	-	Bottom of slab	Back yard entry to Basement floor	
D22	3' x 7'	-	7'9" (9" Lintel below beam)	Toilet in Basement	
D23	3' x 7'	-	7'9" (9" Lintel below beam)	Staff Quarters in Basement	
D24	3' x 7'	-	Bottom of Tie Beam	Terrace	
D25	3' x 7'6"	-	Bottom of Tie Beam	Passage to Chimney	
D6	3'6" x 8'	-	Bottom of Tie Beam	Master Bedroom entry	
D12	3'6" x 8'	-	Bottom of Tie Beam	Childrens bedroom entry	
D15	3'6" x 8' 6"	-	Bottom of Tie Beam	Parents bedroom entry	
D17	3'6" x 8'	-	8' from FFL	Guest bedroom entry	
D20	3'6" x 8'	-	Bottom of Roof Beam	Formal Dining Room Entry	
D19	7'8" x 8'	-	Bottom of Tie Beam	Prayer room entry	
W1	L - opening Horizontal lengths- 3'+8'+ 10'-9"+5'10" + 3'-4" Vertical lengths- 5'-11" + 7'-8"+14' + 7'-8"+ 7'-8" + 6' Slanting lengths - 5'-10"+8' + 9'-7"+14'	1'	Bottom of roof slab	Formal dining corner L sloping window	
W12	L - opening Horizontal lengths- 3'+8'+ 10' 9"+5'10" + 3'4" Vertical lengths- 7' 6"+ 14' + 7'-6"+ 7'-6" + 6' Slanting lengths - 8'+ 5'-8"+ 9' 7"+14'	1'	Bottom of roof slab	Formal living corner L sloping window	
W2	(2'+9'6"+9'6"+2') x 7'6"	6"	Bottom of sloped roof slab	Master Bedroom L bay window	
W3	(2'+ 9'6"+ 2') x 6'	2'0"	Bottom of sloped roof slab	Dry Kitchen bay window	
W4	6' X 4'	3'6"	Bottom of Tie Beam	Wet kitchen	
W5	3' X 4'	2' from winding step	Bottom of tie beam	Staircase	
W6	3' X 4'	1'6" from landing step	Bottom of tie beam	Staircase Basement	
W7	3' X 4'	4' from landing step	8'6" (6" Lintel)	Staircase	
W8	6'8" x 6'	2'	Bottom of Tie Beam	Childrens bedroom	
W9	(2' + 7'6" + 7'6" + 2')x 6'6"	2'	Bottom of sloped roof slab	Parent's Bedroom Bay window	
W10	Horizontal lengths- 8' + 11'-3" Vertical lengths- 5' Slanting lengths- 6'	3'	8' (beam bottom)	Guest bedroom	
W11	Horizontal lengths- 4' Slanting lengths- 8'-9" + 8'-9" Vertical length - 8'6"	1'	8' (beam bottom)	Prayer room	
W13	12' X 7'6"	6"	8' (beam bottom)	Formal Living	
W14	6' X 4'	3'-9"	Beam Bottom	Staff quarters	
W15	3' X 2'6"	5'3" from Store	Beam Bottom	Store	CANCELLED
W16	Horizontal lengths- 3'+4'4"+3'+6'1" Vertical lengths - 2'9" Slanting lengths- 3'3"	5' from Parking	Beam Bottom	Parking	
V1	2' X 3'	5'	8' (beam bottom)	Powder room	
V2	3' X 3'	5'	8' (beam bottom)	MBR Toilet	
V3	3' X 2'6"	5'	7' 6" (beam bottom)	Wet Kitchen	
V4	2' X 2'6"	5'6"	8'(beam bottom)	CBR Toilet	
V5	3' X 4'	8'	12'(beam bottom)	PBR Toilet	
V6	3' X 4'	4'	8'(beam bottom)	GBR Toilet	
V7	3' X 2'6"	5'	7' 6" (beam bottom)	Basement Toilet	
DW1	8' X 8'	0	8'(beam bottom)	Informal Living	
DW2	8' X 8'	0	8'(beam bottom)	Informal Living	
J3	Horizontal- 2' Vertical- 2'10"+2'7" Slanting- 2'3"	9'6" (Beam top)	Roof beam bottom	Powder room	
J4	Horizontal- 3' Vertical- 2'6"+ 2'2" Slanting- 3'	9'6" (Beam top)	Roof beam bottom	MBR Toilet	
J5	4' x 8'	6"	8'6" (Beam bottom)	Informal Living	CANCELLED
J6	4' x 7' 6"	6"	8' (Beam bottom)	Informal Living	CANCELLED
J7	4' x 7' 6"	6"	8' (Beam bottom)	Informal Living	
J8	3' x 3' 3"	8' 0"	slab beam bottom	Informal Living	CANCELLED
J1	3' X 8'	6" from Courtyard	8'6" from courtyard (Beam bottom)	Foyer	
J2	3' X 8'	6" from Courtyard	8'6" from courtyard (Beam bottom)	Foyer	
J9	5'7" X 6'	1'6" from landing	Bottom of Tie Beam	Staircase Ground Floor	
J10	5'7" X 6'	2' from Landing	Roof beam bottom	Staircase Terrace Floor	
CS1	12' 1" X 2'	9'6" (Beam top)	(Roof slab beam bottom)	Foyer	JAALI
CS2	12' 1" X 2'	9'6" (Beam top)	(Roof slab beam bottom)	Foyer	JAALI
CS3	4' 3 1/2" X 2'	9'6" from Formal Dining(Beam top)	(Roof slab beam bottom)	Formal dining	JAALI
CS4	5' 9" X 2'	9'6" from WW(Beam top)	(Roof slab beam bottom)	MBR walk-in wardrobe	JAALI
CS5	5' 9" X 2'	9'6" from MBR(Beam top)	(Roof slab beam bottom)	MBR	JAALI
CS6	5' X 4'	9'6"	(Roof slab beam bottom)	MBR walk-in wardrobe	
CS7	5' X 4'	9'6"	(Roof slab beam bottom)	MBR toilet	
CS8	Horizontal - 4'9" Vertical - 4'6" + 4' Sloping - 4'9"	9'6"	(Roof slab beam bottom)	MBR Bay window	
CS9	Horizontal - 4'9" Vertical - 4'6" + 4' Sloping - 4'9"	9'6"	(Roof slab beam bottom)	MBR Bay window	
CS10	Horizontal - 6' Vertical - 5'8" + 7'3" Sloping - 6'3"	10'	(Roof slab beam bottom)	Informal Living	
CS11	Horizontal - 6' Vertical - 7' + 3'10" Sloping - 6'	10'	(Roof slab beam bottom)	Informal Living	
CS12	Horizontal - 8' Vertical - 4'3" + 5'4" Sloping - 8'1"	10'	(Roof slab beam bottom)	Dry kitchen	
CS13	6' X 2'	10'6" from courtyard	(Roof slab beam bottom)	Passage (Courtyard)	JAALI
CS14	9'2" X 2'	10'6" from courtyard	(Roof slab beam bottom)	Passage (Courtyard)	JAALI
CS15	6' X 2'	10'6" from courtyard	(Roof slab beam bottom)	Passage (Courtyard)	JAALI
CS16	5' X 1'5" AND 2'6"		(Roof slab beam bottom)	Storage	CANCELLED
CS17	5' X 2'8" AND 4'3"		(Roof slab beam bottom)	Laundry	CANCELLED
CS18	4'8" X 2'6"	10' from courtyard	(Roof slab beam bottom)	CBR walk-in wardrobe	
CS19	5' Diameter	10' from CBR	(Roof slab beam bottom)	CBR Bay window	Circular
CS20	5' X 2'5"	10' from courtyard	(Roof slab beam bottom)	CBR	JAALI
CS21	15'1" X 2'6"	10' from courtyard	(Roof slab beam bottom)	CBR	JAALI
CS22	8'1" X 2'6"	10'	(Roof slab beam bottom)	PBR	JAALI
CS23	Horizontal - 2'7" + 4'4" Vertical - 4'3" Sloping - 4'1" + 4'1" + 7'4"	9'6"	(Roof slab beam bottom)	GBR toilet	
CS24	10' x 1'6"	9'6"	(Roof slab beam bottom)	GBR	JAALI
CS25	8'2" x 2'	9'6" from prayer room	(Roof slab beam bottom)	Prayer room	JAALI
CS26	15'8" X 2'	9'6" from Formal Living	(Roof slab beam bottom)	Formal Living	JAALI
CS27	Horizontal - 3'10" + Vertical - 3'3" + 3'9" Sloping - 4'	10'	(Roof slab beam bottom)	Dry Kitchen	
CS28	12'3" x 2'	9'6" from Foyer(Beam top)	(Roof slab beam bottom)	Foyer	JAALI
CS29	3'10" X 2'6"	10' (Beam Top)	(Roof slab beam bottom)	GBR DOOR	JAALI
CS30	Horizontal - 5' Vertical - 1'5" + 2'6" Sloping - 5'1"	13'1" from CBR	(Roof slab beam bottom)	CBR Mezzanine	
CS31	Horizontal - 5' Vertical - 1'5" + 6'10"	13'1" from CBR	(Roof slab beam bottom)	CBR Mezzanine	

NOTE: Schedule is to be read along with the joinery detail drawings for complete understanding

PLEASE NOTE:

This drawing is the copyright of Design Harmony.
This drawing should not be reprinted or copied without prior permission of Design Harmony for any purpose - academic, personal or commercial.
All measurements are to be read only.
Any intended deviations at site from details in drawing need to be approved by Design Harmony.
Any noted discrepancies from drawing to site status need to be brought to the notice of Design Harmony immediately.

S.NO.	REVISION	DATE
R1	Joinery numbers added Courtyard columns revised	17-04-21
R2	Courtyard level (addition of a step) and patio level revised CBR CS21 size revised and mezzanine floor level changed to 10'6"	30-04-21
R3	PBR Bay window (W9) size increased Sloped roofs of Bay window's top matched till beam top Portico level 0'0" CBR Tie beam above the Walk-in wardrobe height changed. CBR Walk-in wardrobe door (D13) size changed to 3' x 7' Bottom of Projection of W10 to be aligned with the bottom of structural slab of CBR PBR passage width changed increased to 5' Passage around courtyard to be 6' all around	25-05-21
R4	Doors D5 in Foyer and D7 in MBR Toilet removed Passage behind Firewood Toilet added Sliding Door added in Prayer Room Verandah Stone Wall corrected to Stone Cladding Wall	26-06-21
R5	Reduction in patio width Added 12' passage to the west Extended Jali J7 to 5' beyond the column	10-08-21
R7	Reduction in courtyard steps width Modification to wet kitchen Modification to chimney passage Joinery schedule updated	12-10-21
R8	made guest bedroom.	18-03-22

PROJECT
PROPOSED RESIDENCE FOR MRS. HIBA AND MR.MOHAMAD SHAKEER AT MANGALORE

DRAWING TYPE
GFC

DRAWING TITLE
First floor plan

Dwg no.	211gfc/01/R0
Date	07-03-2022
Drawn By	Praveen Singh

POETRY OF SPACE
design harmony
Sustainable Architecture I Interiors I Landscape
Lake View Farm
Siddhapura, Bengaluru - 560066
+919686669602 jaya@designharmony.in