

DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH
	2200	3000	550	400


PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)
	2240	3000	555

NOTE : ALL DIMENSIONS ARE IN mm

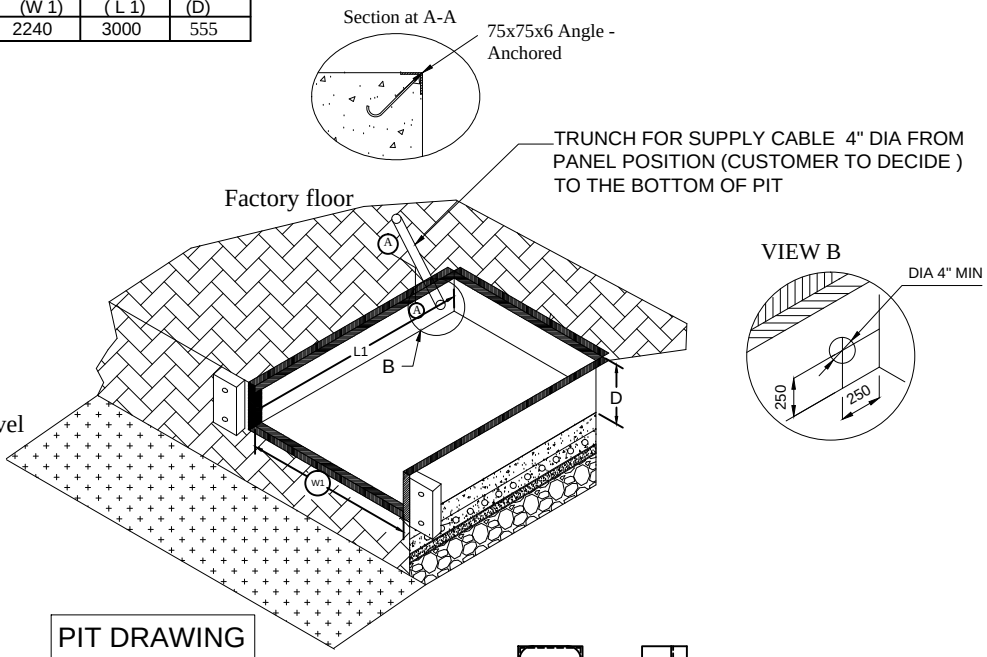


PIT DRAWING

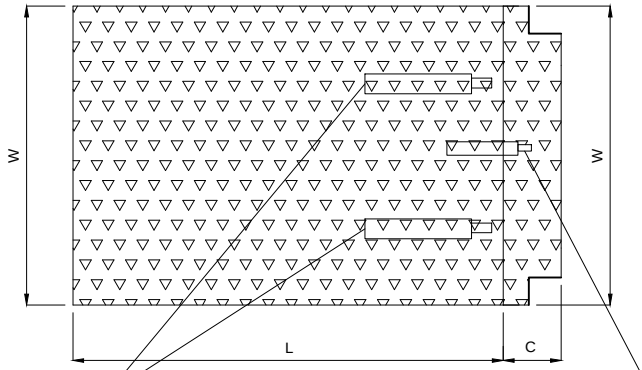

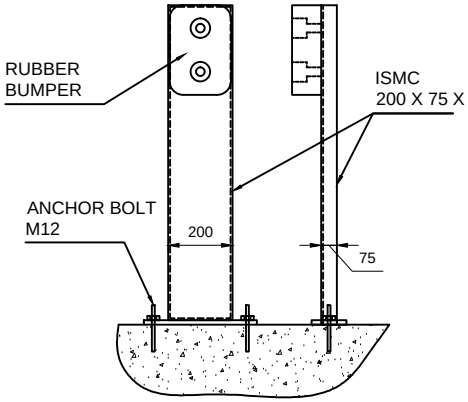

BUMPER MOUNTING

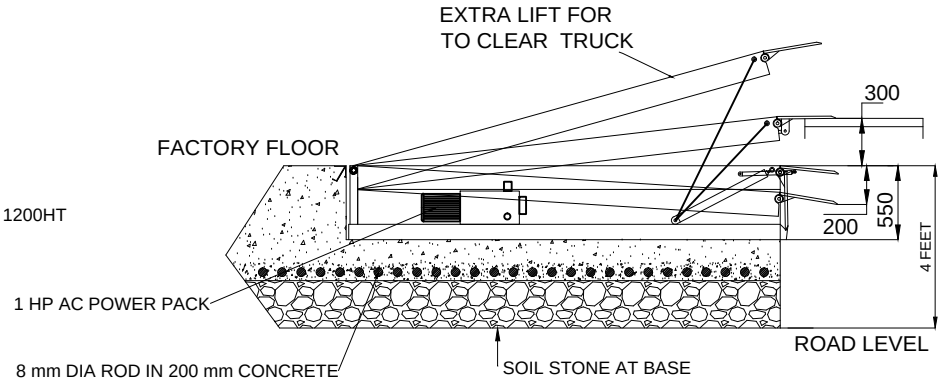

DOCK LEVELER-

IMP NOTE: -

1.CAPACITY : 6 TON
2.PLEASE NOTE THAT THE CAPACITY OF DOCK LEVELER CONSIDERED IS THE CAPACITY AFTER THE LIP IS RESTED ON THE VEHICLE.
3.CYLINDERS PROVIDED ARE INTENDENT TO BE USED ONLY FOR LIFTING OF BARE DOCK & CAN NOT LIFT OTHER LOADS.
4.PROPER DRAINAGE SHOULD BE DONE.
5.TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 7000 MM).
6.LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 10000 KGB FLOOR LOADING.
7.MOUNTING ARRANGEMENT FOR BUMPERS SHOULD BE MADE AS PER BUMPER DRAWING (IF ORDERED).
8.FABRICATION TOLERANCE WILL BE +/- 10 MM.

TOLERANCE - ±10mm

REV NO	REV DATE	DRAWN	REMARK
R01	12.04.2019	P.V.A	1. DETAILS ADDED

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: DOCK LEVELER

	NAME	SIGN	DATE
DRAWN	P.V.A		12.04.2019
CHECK	V.M.T		12.04.2019
APPRD.			

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - OJI INDIA PACKAGING PVT. LTD.
PROJECT -
SITE LOCATION -
DWG. NO. : NIHVA/19-20/0002/R01
SCALE: NTS | WT: | REV- R01