
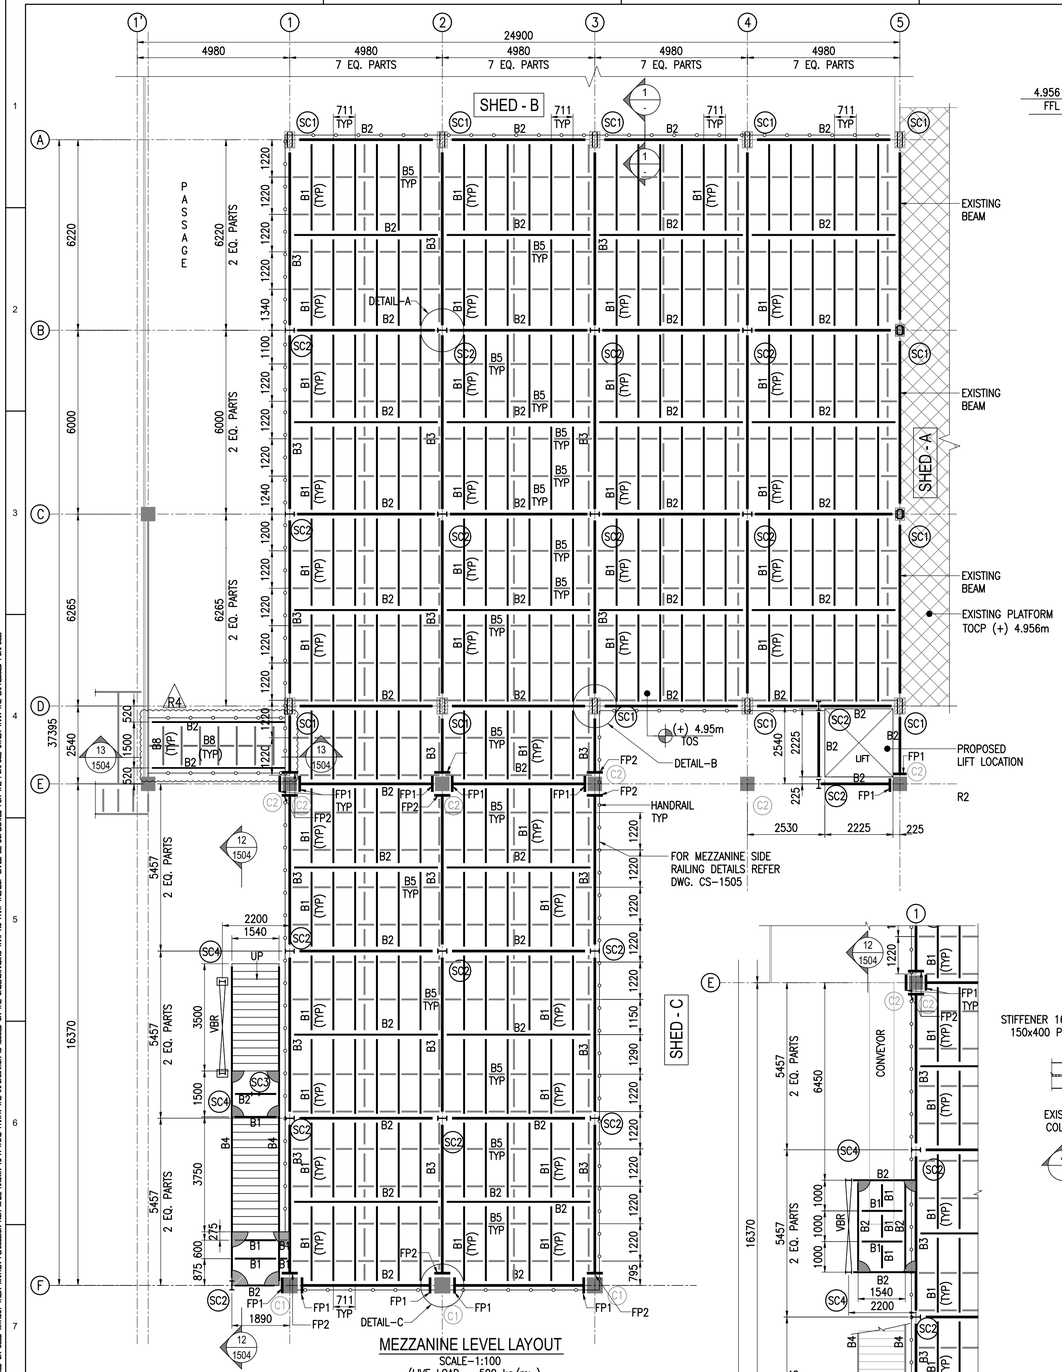


MEZZANINE LEVEL LAYOUT

SCALE-1:100


(LIVE LOAD = 500 kg/m²)

(NOTE:- 4.956m TOP OF FLOOR TO MATCH WITH ADJACENT EXISTING PLATFORM)

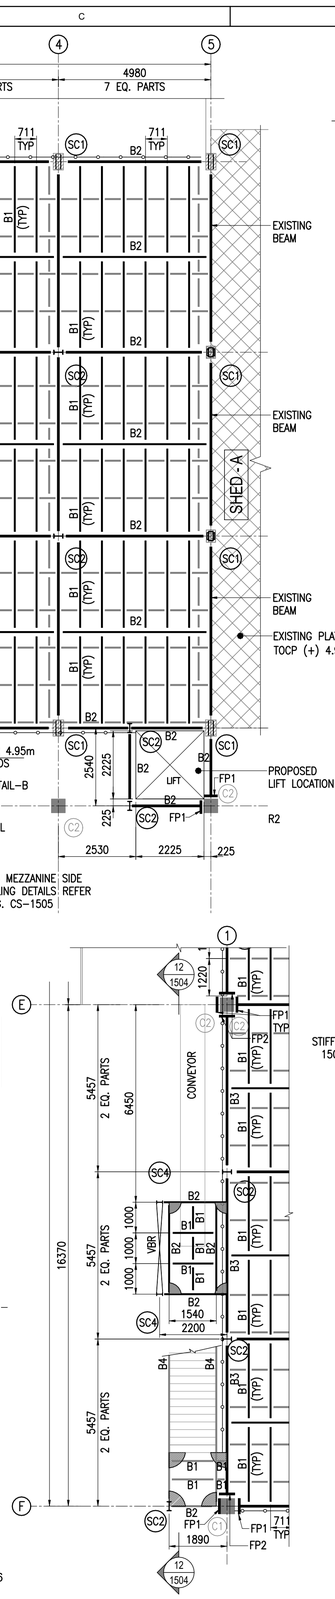


PART CONVEYOR LAYOUT AT MEZZANINE LEVEL

SCALE-1:100

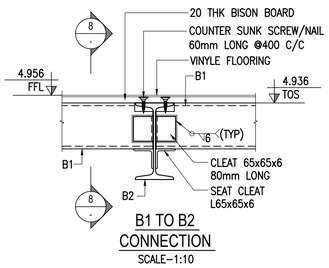


B1 TO B2 CONNECTION

SCALE-1:10

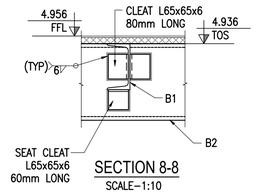

SECTION 8-8


SCALE-1:10

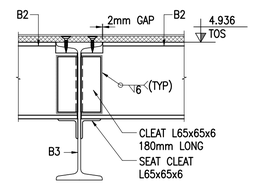



B2 TO B3 CONNECTION

SCALE-1:10

MEMBER LIST		
MKD	MEMBER SIZE	REMARK
B1	MC 150	PROPOSED
B2	MB 250	PROPOSED
B3	MB 450	PROPOSED
B4	MC 250	PROPOSED
B5	ISNT100	PROPOSED
B6	MB100	PROPOSED
B8	MC75	PROPOSED
SC1	BOX MC 150	EXISTING STEEL COLUMN
SC2	MB 300	PROPOSED
SC3	MB 250	PROPOSED
SC4	MB 200	PROPOSED
C1	500x500	EXISTING RCC COLUMN
C2	450x450	EXISTING RCC COLUMN






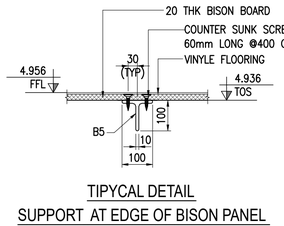


TIPYCAL DETAIL SUPPORT AT EDGE OF BISON PANEL


SCALE-1:10

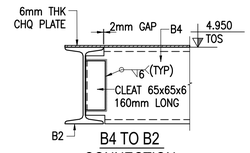



B4 TO B2 CONNECTION


SCALE-1:10




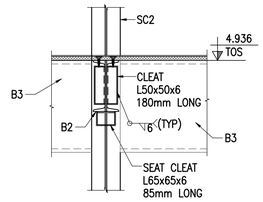


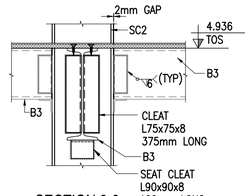


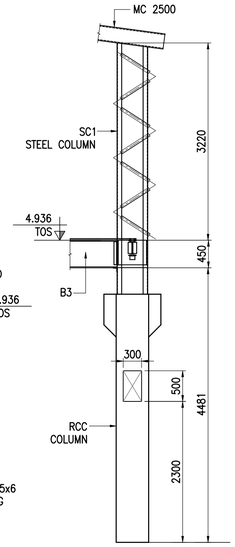


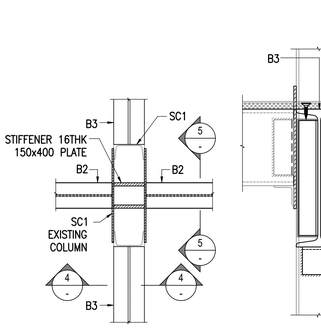


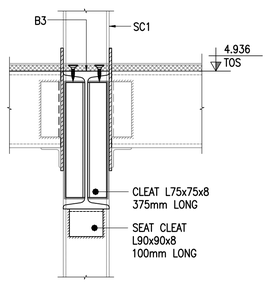

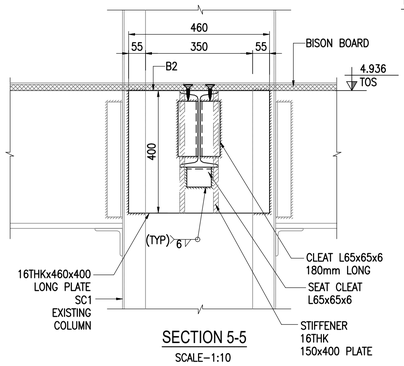

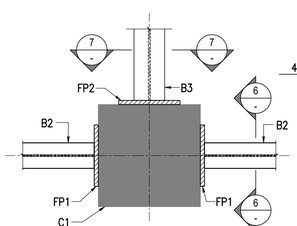

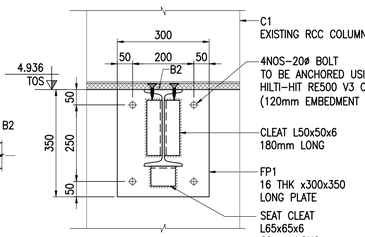

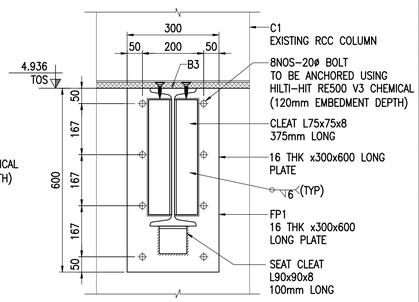

KEY PLAN



NOTES

1. ALL DIMENSIONS ARE IN MILLIMETERS & LEVELS ARE IN METERS (UNO).
2. DO NOT SCALE THE DRAWING. FOLLOW WRITTEN DIMENSIONS ONLY.
3. READ THIS DRAWING IN CONJUNCTION WITH RELEVANT ARCHITECTURAL DRAWING.
4. ALL STEEL MATERIAL SHALL CONFORM TO IS:2062 GRADE 'A'.
5. ALL WELDS ARE 6mm CONTINUOUS FILLET WELD UNO.
6. ALL CONNECTIONS ARE WELDED CONNECTIONS UNO.
7. GRADE OF STEEL SHALL BE HAVING YIELD STRESS OF 250 MPa.
8. ALL STRUCTURAL STEEL WORK SHALL HAVE TWO COATS OF RED-OXIDE PRIMER AND TWO COATS OF SYNTHETIC ENAMEL OF APPROVED SHADE UNO.
9. BEFORE FABRICATION ALL SECTIONS & PLATES SHALL BE STRAIGHTENED & WIRE BRUSHED TO COMPLETELY REMOVE SCALE & RUST.
10. PIPING CUTOUTS ON CHEQUERED PLATE SHALL BE PROVIDED AT SITE.
11. FUTURE EQUIPMENT SHOWN FOR SPACE PROVISION, WHERE APPLICABLE.
12. ALL PROPOSED EQUIPMENT ARE SHOWN AS TENTATIVE. IT WILL BE FINALIZED AFTER GETTING VENDOR DRAWINGS.
13. ALL EQUIPMENT LOADS ARE CONSIDERED TENTATIVE. (GIVEN BY RAJ PETRO), THERE MAY BE MINIOR VARIATION AT LATER STAGE, BASED ON VENDOR SELECTION.
14. CONTRACTOR TO PREPARE FABRICATION SHOP DRAWINGS & SUBMIT YMSCE FOR APPROVAL.

LEGENDS

UNO	-----	UNLESS NOTED OTHERWISE
FGL	-----	FINISHED GROUND LEVEL
FFL	-----	FLOOR FINISHED LEVEL
TOC	-----	TOP OF CONCRETE
TOP	-----	TOP OF PEDESTAL
TOCP	-----	TOP OF CHQD. PLATE
FFL	-----	FLOOR FINISHED LEVEL
RWP	-----	RAIN WATER PIPE
B/B	-----	BACK TO BACK
T	-----	TOP
B	-----	BOTTOM
P	-----	PLATE
W	-----	WIDE

REFERENCE DRAWINGS

DRAWING NO	DRAWING TITLE

FOR CONSTRUCTION

REV	DATE	DESCRIPTION	DRN	CHD	APP
R4	16.02.21	REVISED AS MARKED	MSD	JGA	YMS
R3	05.02.21	REVISED AS MARKED	SDB	JGA	YMS
R2	23.11.20	REVISED AS MARKED	AAB	JGA	YMS
R1	30.10.20	DETAILS ADDED	ABS	SAB	YMS

	INITIALS	SIGNATURE	DATE
DRAWN	ABS		23.10.2020
CHECKED	JGA		23.10.2020
APPROVED	YMS		23.10.2020

RELEASED FOR: ☐ CONCEPT ☐ INFORMATION ☐ ADVANCE COPY ☐ TENDER ☐ APPROVAL ☒ CONSTRUCTION

PROJECT

RAJ PETRO, SILVASA

NAME OF STRUCTURE

SHED A & C

TITLE

MEZZANINE FLOOR STRUCTURAL LAYOUT

YMS CONSULTING ENGINEERS
502, Thawar Apartment, Main Carter Road
Borivali (East), Mumbai 400066, India
Email - ymsankhe@ymsce.com
Contact - +91 98210 69288

SCALE	PROJECT NO	DRAWING NO	REV
1:1	YMSCE-PRJ20018	CS-1501	R4

THIS DRAWING IS THE PROPERTY OF YMS CONSULTING ENGINEERS. IT SHALL NOT BE COPIED OR USED WITHOUT THEIR WRITTEN PERMISSION NOR MADE KNOWN TO A THIRD PARTY. THE INFORMATION IS ISSUED ON THE UNDERSTANDING THAT NO PART THEREOF SHALL BE DUPLICATED FOR THE PURPOSE OTHER THAN THE EXPRESSED PURPOSE.

M-A1