NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk,
MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

Lupin Limited
Pune

Date : 17.12.2020
Quote NO : SQT.20.21.2809R4
Kind Attn : Aashish Hande
Email Id : aashishhande@lupin.com
Contact No: 9930792276

Subject : Revised Quotation for Honeycomb Grill Motorized Single Skin Rolling Shutter.

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.
This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2
C.	General Conditions	3
D.	Terms & Condtions	3

A) Commercial Offer

Sr No	Description	Size		Qty	Supply Charges in INR		Installation Charges in INR	
		Clear Width (mm)	Clear Height (mm)	(Nos)	Unit Price	Total Amount	Unit Price	Total Amount
1	**Motorized Single Skin Rolling Shutter - Honeycomb Grill**	2500	3000	2	94,000	188,000	15,000	30,000
2	**Motorized Single Skin Rolling Shutter - Honeycomb Grill**	3950	3200	2	116,000	232,000	15,000	30,000
3	**Motorized Single Skin Rolling Shutter - Honeycomb Grill**	4650	4000	1	142,000	142,000	15,000	15,000
4	**Motorized Single Skin Rolling Shutter - Honeycomb Grill**	5300	4000	1	155,000	155,000	15,000	15,000
	Total			**6**		**717,000**		**90,000**
5	P&F Charges			0%		-		
	Total Without Taxes					**717,000**		**90,000**
	GST Extra @ 18%			18%		129,060		16,200
	Total With Taxes					**846,060**		**106,200**
6	Transportation Charges					Inclusive		
7	Unloading Charges @ Site					In Client Scope		


NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk,
MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

Motorized Rolling Shutter with Honeycomb Grill

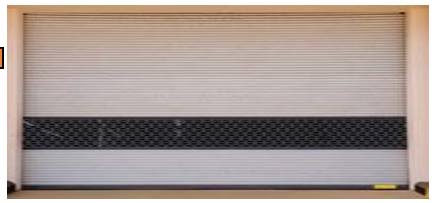

Sr .No.	Specification	GI Motorized Rolling Shutter with Honeycomb Grill
1	**Description:**	Motorised Rolling Shutter with GI Slats with thickness of 1 mm.
2	**Mounting Location area**	Inside area / Outside area
3	**Mounting Surface**	Side Brackets: Optional = On Concrete /Steel & Side
4	**Curtain Panel**	The panel made of 1.0mm thick GI.
5	**Curtain panel size**	75mm wide
6	**Curtain Profile**	Curved with 1000mm Honeycomb Grill to be installed at eyelevel height
7	**Bottom Profile**	M. S. Plate 100 mm x 2.5 mm thick with angle stiffener
8	**Side Guide Profile**	M.S." U" Shaped profile.
9	**Roller Shaft**	M.S. Tubular Pipe with Flange & machined shaft at the ends Pipe Día -100 to 300 mm as per w x h
10	**Side Brackets**	MS Plate 3 mm to 10 mm thick, as per the opening dimension.
11	**Hood Cover**	Made of GI Sheet Thickness 0.9 mm GF mm
12	**Surface finish**	Powder coated - Finish with two coats of Polyurethane spray paint similar to RAL9006 over one coat of Epoxy Primer.
13	**Drive Unit & Mounting Type**	Electric Motor - Indirect Mounting - Sprocket chain arrangement – IP54 Protection
14	**Control Panel**	Three Station Push Button with Deadman Control
15	**Safety**	Safety Catch

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk,
MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

Note: Please find below List which are in Client Scope

Sr. No	Description	Remark
1	Secured and fully covered Store area to keep the material	In Client Scope
2	Scaffolding/Hydra/Crane/Forklift Etc - Required for Installation at Site	In Client Scope
3	Electrical Supply on the site single phase/three phase points at different places.	In Client Scope
4	Any civil / masonry/structural work required	In Client Scope
5	All structure support required	In Client Scope
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.	In Client Scope
7	Conduits, Cables required	In Client Scope

D) Terms & Conditions

Price : Extra at Actual

Delivery : 3-4 weeks from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

Payment : 80% Advance along with Confirmed Purchase Order & Balance before dispatch.

Validity : Validity of Offer is 15 days from the date of quotation

Warranty : 12 months from the date of supply.

Please feel free to Contact **Mr. Arjun Patil on 8551096333** For any further Clarification /Information in this Concern.

With Best Regards

Shailesh Bhoir
8551091333
For NIHVA Technologies Pvt Ltd