

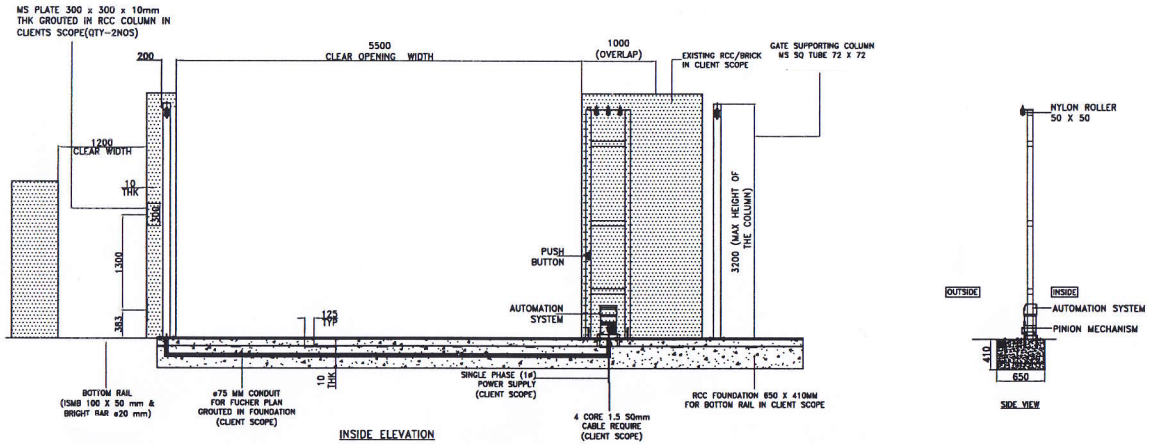


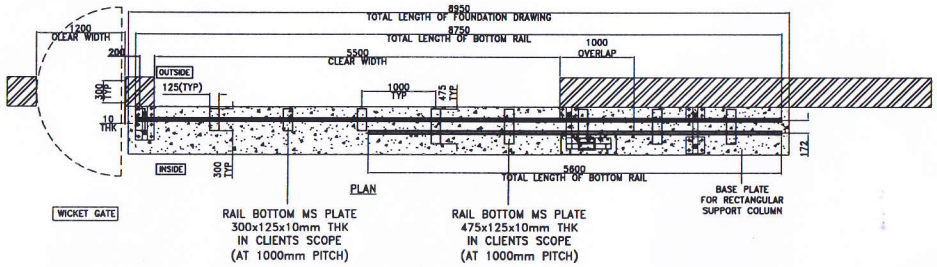


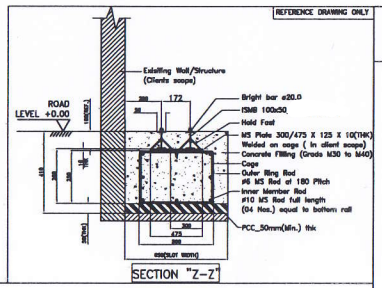


STEP OF INSTALLATION:-

1. AS PER BOTTOM RAIL ASSEMBLY OVERALL LENGTH, MAKE AROUND 650X410 MM SLOT IN GROUND.
2. PREPARE PCC LAYER OF 50MM THK AT BOTTOM OF THE SLOT.
3. MAKE A STEEL CAGE AS SHOWN IN DRAWING. AND REST THE CAGE ON PCC LAYER AS SHOWN. FOR CAGE STEEL MEMBERS, KINDLY DISCUSSED WITH ARCHITECTURAL OR STRUCTURAL ENGINEER.
4. STEEL CAGE DRAWING IS ONLY FOR YOUR REFERENCE. HEIGHT AND ITS MEMBERS CAN BE VARY AS PER MOVING LOAD ON THE BOTTOM RAIL.
5. WHEN THE POSITION OF THE STEEL CAGE IS DONE THEN WELD MS PLATE (AS SHOWN IN DRAWING) WITH STEEL CAGE ON 1000 mm PITCH. REFER DRAWING FOR DETAILS.KINDLY MAINTAINED TOP SURFACE OF ALL THE PLATES IN ONE PLANE.
6. MAINTAIN DISTANCE BETWEEN TOP SURFACE OF THE MS PLATE AND FINISHED FLOOR LEVEL(FFL) OR ROAD LEVEL BY 100mm. SO WE CAN GET ONE PLAIN SURFACE THROUGHOUT WHERE WE CAN MOUNT/WELD ISMB 100x50. REFER DRAWING FOR DIRECTIONS.
7. FINALLY POUR RCC RECIPE (GRADE M30/ M40) IN THE SLOT. AND FILL IT PROPERLY.


STEPS OF FOUNDATION : -



AS PER RAIL ASSEMBLY'S OVERALL LENGTH MAKE A 650X410 DIGGINGMAKE A PCC 50 MM HEIGHT AT BOTTOM



MAKE A STEEL CAGE ON PCC AS PER DIMENSIONS SHOWN IN THE DIAGRAM ie 250 x 500mm

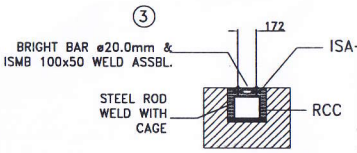

ON STEEL CAGE WELD MS PLATE (AS SHOWN IN DRAWING) ON EQUIDISTANCE PITCH OF 1000mm THEN MOUNT I-BEAM RAIL & BY USING STEEL ROD WELD THE RAIL TO CAGE AS SHOWN IN THE DIAGRAM AT SPECIFIED DISTANCES FINALLY POUR THE RCC RECIPE AS SHOWN IN THE DIAGRAM

GATE DIMENSION		
CLEAR WIDTH : 5500 mm	CLEAR HEIGHT : 3000 mm	QTY : 01 nos
WICKET GATE DIMENSION		
CLEAR WIDTH : 1200 mm	CLEAR HEIGHT : 1800 mm	QTY : 01 nos

REV.NO.	REVISION DETAILS:	REV.DATE

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

TITLE: **MOTORIZED SLIDING GATE**

SUBTITLE: **FOUNDATION DRAWING**

CLIENT'S APPROVAL:

CLIENT: WILO MATHER & PLATT PUMPS

PROJECT: WILO MATHER & PLATT PUMPS

SITE LOCATION: CHINCHWAD

DRAWING NO: NIHVA/17-18/0262

SCALE : 1:1 SHEET NO : 2 OF 2

DRAWN BY: CCW DATE: 17.10.2017

CHECKED BY: CAK DATE: 17.10.2017

DOC NO.:- QF/DD/01