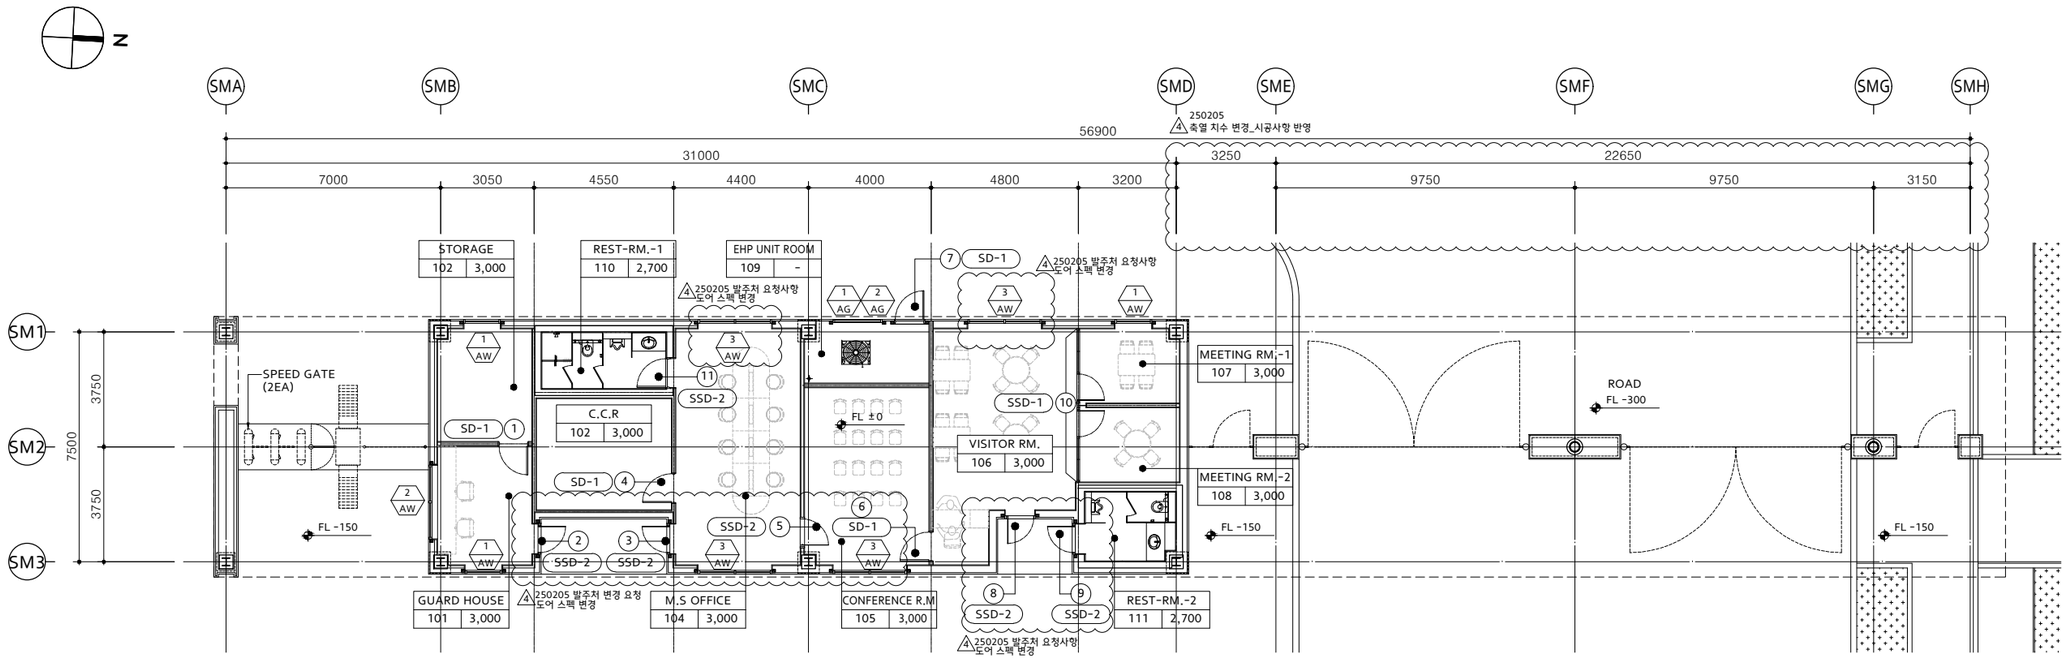



1 GROUND FLOOR DOOR & WINDOW PLAN

SCALE : 1/100

KEY PLAN


NOTE


1. IF APPLICABLE TO EXISITING DOORS, WINDOWS CONSTRUCTION SHALL BE CARRIED OUT CLIENT'S, CONTRACTOR'S APPROVAL.
2. VARIOUS OPENINGS MUST BE DETERMINED IN ADVANCE BY SHOP DWG OF THE RELEVANT WORK TYPE
3. PROVIDE 15mm GAP BETWEEN INSIDE FACE OF STEEL FRAMING AND CLEAR OPENINGS.



DOOR SHAPE & LEGEND


1 GENERAL NOTE	2 DOOR & WINDOW TYPE






SD	STEEL DOOR	OHD	OVERHEAD DOOR
FSD	FIRE STEEL DOOR	RS	ROOL-UP SHUTTER
SSD	S' STEEL DOOR	RRS	RAPID ROOL-UP SHUTTER
SFD	S' STEEL FOLDING DOOR	AW	ALUMINUM WINDOW
ASD	AUTO SLIDING DOOR	SSW	S' STEEL WINDOW
SLID	SLID DOOR	AG	ALUMINUM GRILL


3 DOOR SHAPE : SINGLE DOOR

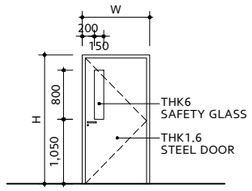


DOOR SHAPE - S1



DOOR SHAPE - S2



DOOR SHAPE - S3




DOOR SHAPE - S4


DOOR SCHEDULE

FLOOR NO.	NO.	DOOR NO.	MATERIAL		DOOR SIZE			SHAPE	MATERIAL			FIRE	KEY SET	HW SET	REMARKS
			DOOR	FRAME	THK	WIDTH	HEIGHT		HEAD	JAMB	SILL				
1F	1	SD-1	STL	STL	45	1,000	2,100	S1	-	-	-	-	-	110	4 250205 발주처 요청사항 도어 스펙 변경
	2	SSD-2	GLASS	S'STL	45	1,000	2,100	S3	-	-	-	-	-	521	
	3	SSD-2	GLASS	S'STL	45	1,000	2,100	S3	-	-	-	-	-	521	
	4	SD-1	STL	STL	45	1,000	2,100	S1	-	-	-	-	-	110	
	5	SSD-2	GLASS	S'STL	45	1,000	2,100	S4	-	-	-	-	-	516	
	6	SD-1	STL	STL	45	1,000	2,100	S1	-	-	-	-	-	110	
	7	SD-1	STL	STL	45	1,000	2,100	S1	-	-	-	-	-	110	4 250205 발주처 요청사항 도어 스펙 변경
	8	SSD-2	GLASS	S'STL	45	1,000	2,100	S3	-	-	-	-	-	521	
	9	SSD-2	GLASS	S'STL	45	1,000	2,100	S3	-	-	-	-	-	521	
	10	SSD-1	REFER TO "DOOR EXTEND ELEVATIONS"											512	
	11	SSD-2	GLASS	S'STL	45	1,000	2,100	S2	-	-	-	-	-	501	


WINDOW SCHEDULE

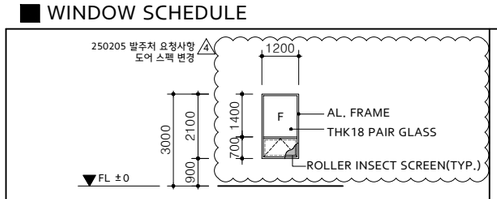


ID	1 AW ALUMINUM WINDOW	QT'Y	3 EA
GLAZING	THK18 PAIR GLASS		
FRAME	AL.BAR / ELECTROSTATIC POWDER COATING		
HARDWARE	-		

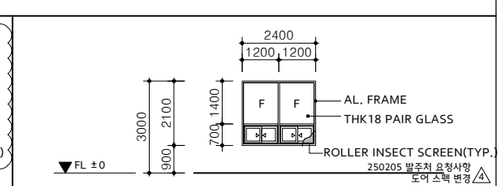


ID	2 AW ALUMINUM WINDOW	QT'Y	1 EA
GLAZING	THK18 PAIR GLASS		
FRAME	AL.BAR / ELECTROSTATIC POWDER COATING		
HARDWARE	- 4 250205 발주처 요청사항 도어 스펙 변경		

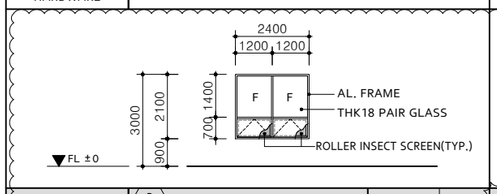

ID	3 AW ALUMINUM WINDOW	QT'Y	4 EA
GLAZING	THK18 PAIR GLASS		
FRAME	AL.BAR / ELECTROSTATIC POWDER COATING		
HARDWARE	-		

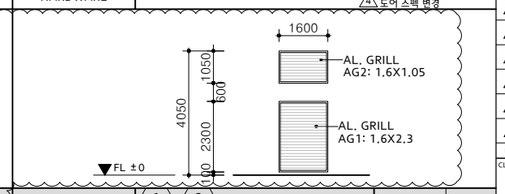

ID	1 AG 2 AG ALUMINUM GRILL	QT'Y	2 EA
GLAZING	-		
FRAME	AL.BAR / ELECTROSTATIC POWDER COATING		
HARDWARE	-		

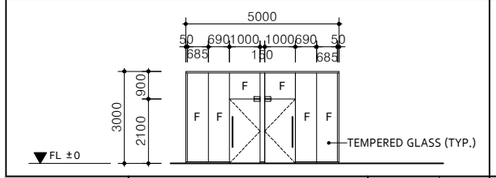

ID	SSD-1	QT'Y	1 EA
GLAZING	THK12 TEMPERED GLASS		
FRAME	100x50x1.5 SST FRAME(HAIR LINE)		
HARDWARE	-		

ID		QT'Y	
GLAZING			
FRAME			
HARDWARE			

REV.	DESCRIPTION	DRAWN	DATE
4	CD Rev.4	OH.J.S	2025. 02.14
3	CD Rev.3	OH.J.S	2025. 01.08
2	CD Rev.2	OH.J.S	2024. 11.29
1	CD Rev.1	OH.J.S	2024. 10.18
0	CONSTRUCTION DRAWING	OH.J.S	2024. 07.30
A	DESIGN DEVELOPMENT	OH.J.S	2024. 06.28

CLIENT

HYUNDAI

ARCHITECTS & ENGINEERS

JUNGLIM ARCHITECTURE

PROJECT TITLE

PUNE HMI PROJECT

DRAWING TITLE

[MAIN SECURITY OFFICE]
DOOR, WINDOW PLAN & SCHEDULE

SCALE	DRAWN	CHECKED	REVIEWED	APPROVED	APPROVED
A1:1/100 A3:1/200	OH.J.S	HONG.G.D	LEE.S.L	HEC INDIA	PARK.T.S
DATE 14 FEB,2025					

MAIN CONTRACTOR

HEC INDIA LLP

DRAWING NO. WA-IPB-645-A-6101

REV. 4

A1 SIZE (841mm x 594mm)