

DF_A1_DT

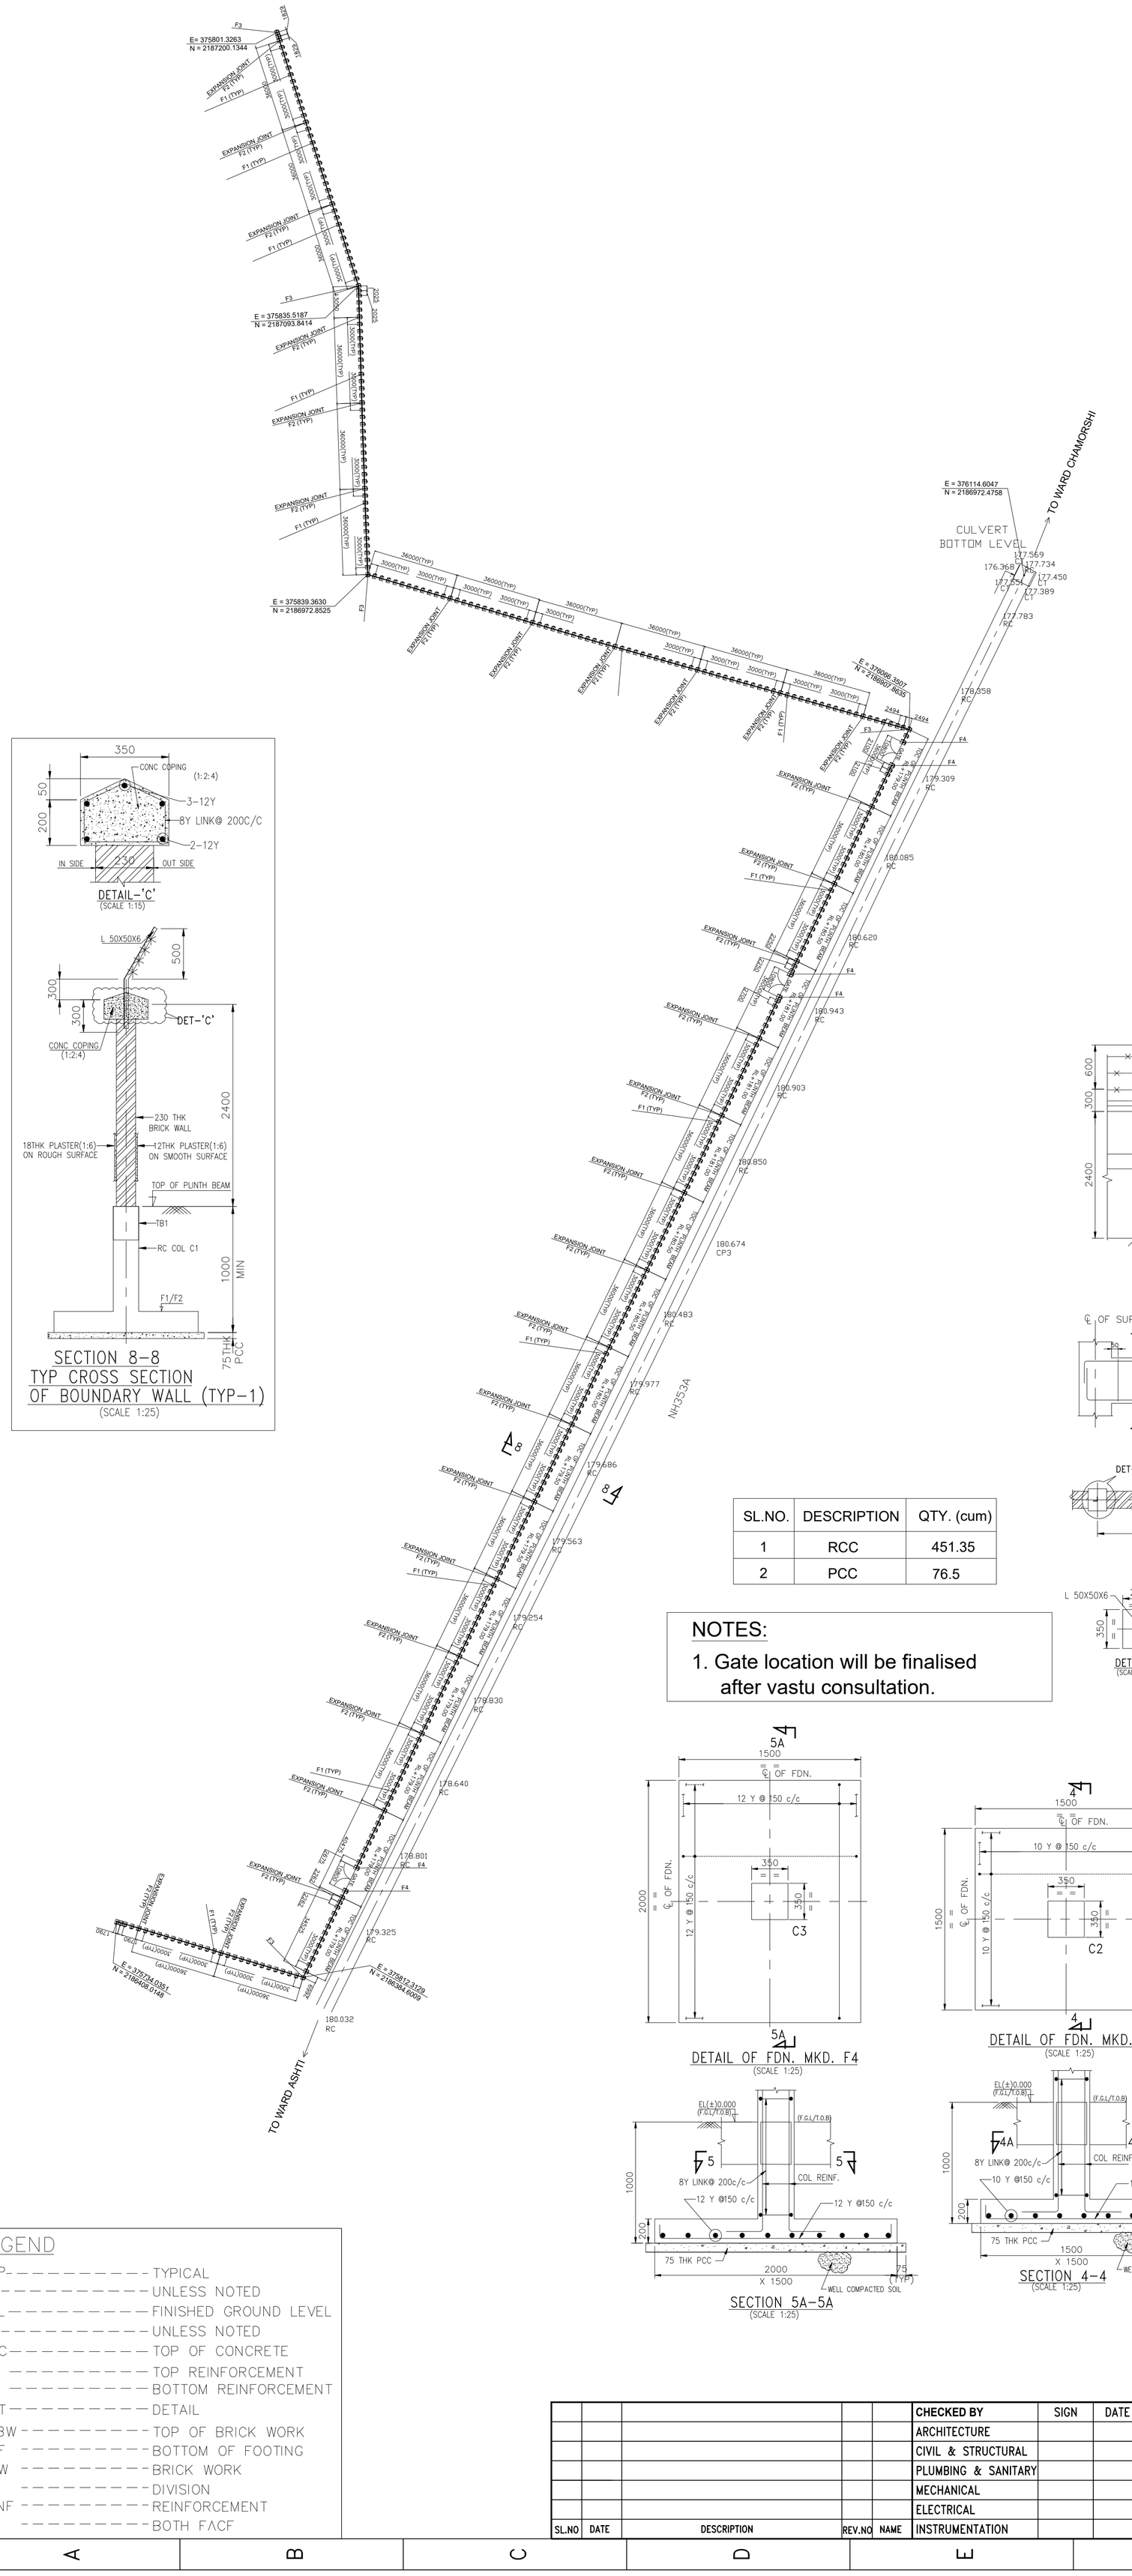

KEY PLAN

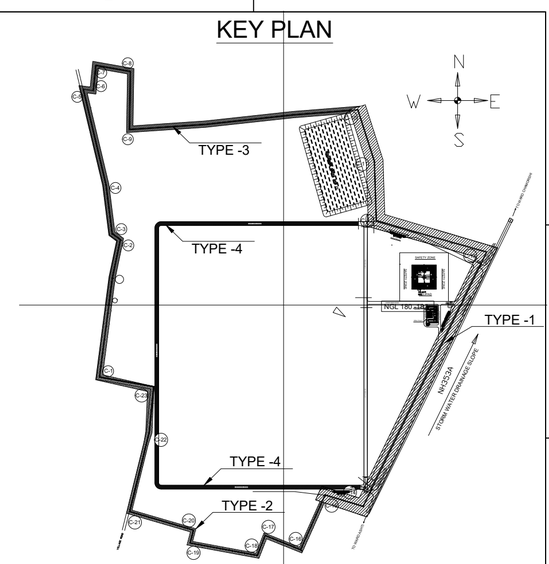

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETRE AND LEVELS IN METERS UNO.
2. MS ANGLES SHALL BE PAINTED WITH TWO COATS OF RED OXIDE ZINC CHROMATE PRIMER AND ONE COAT OF SYNTHETIC ENAMEL PAINT.
3. ALL CO-ORDINATES, LEVELS AND NORTH DIRECTION SHOULD BE CHECKED BEFORE EXECUTION OF THE WORK
4. CONCRETE GRADE M25
5. NOT MORE THAN 50% OF REINFORCEMENT SHALL BE LAPPED AT ANY ONE LOCATION
6. Y MEANS COLD TWISTED DEFORMED BAR CONFORMING TO IS:1786-1985 AND HAVING A MINIMUM YIELD STRENGTH OF 500 N/mm²
7. COMPACTED SAND FILLING TO BE PROVIDED WHEN HARD STRATA IS NOT FOUND BELOW THE FOUNDATION
8. UNLESS NOTED OTHERWISE, THE LAP LENGTH AND ANCHORAGE LENGTH SHELL BE 50 AND 45 TIMES DIA OF BAR FOR HYSD AND MS BARS RESPECTIVELY
9. NET SAFE BEARING CAPACITY AT 1.0M BELOW NGL CONSIDERED 5 T/SqM AS PER SOIL REPORT
10. CLEAR COVER TO MAIN REINFORCEMENT SHALL BE AS FOLLOWS:

	TOP	BOTTOM	SIDE
FOUNDATION	50	50	50
COLUMN	40	–	40
TIE BEAM	25	25	25


11. IN BEAMS BOTTOM BARS TO BE LAPPED AT THE SUPPORT TOP BARS TO BE LAPPED AT CENTER OF SPAN, IF NECESSARY
12. GRADE OF CONC. SHALL BE AS FOLLOWS
    a. FOR RCC WORK-M25 WITH 20MM DOWN GRADED AGGREGATES
    b. FOR PCC WORK-1:4:8 WITH 20MM DOWN GRADED AGGREGATES
13. 2 COATS OF MORTER PROOF CEMENT PAINT SHALL BE APPLIED ON BOTH FACE OF BOUNDERY WALL
14. ALL FOUNDATION SHALL REST ON 1.00M BELOW FGL
15. DEPTH OF FOUNDATION SHALL BE 1.00M BELOW FGL WHERE FGL IS FOUND ABOVE NGL
16. WHERE NGL IS FOUND MORE THAN ONE METER BELOW FGL, THE FILLED SOIL IF ANY ABOVE NGL SHALL BE REMOVED & SHALL BE FILLED UP WITH COMPACTED SAND UP TO BOTTOM OF FOUNDATION

ENGG REF DWGS:

1. LAYOUT PLAN FOR KONSARI STEEL PLANT 2021022-A00-PR-0002
2. SURVEY DWG NO. 2021022-A00-PR-0001


DETAIL-'C'
(SCALE 1:15)

SECTION 8-8
TYP CROSS SECTION OF BOUNDARY WALL (TYP-1)
(SCALE 1:25)

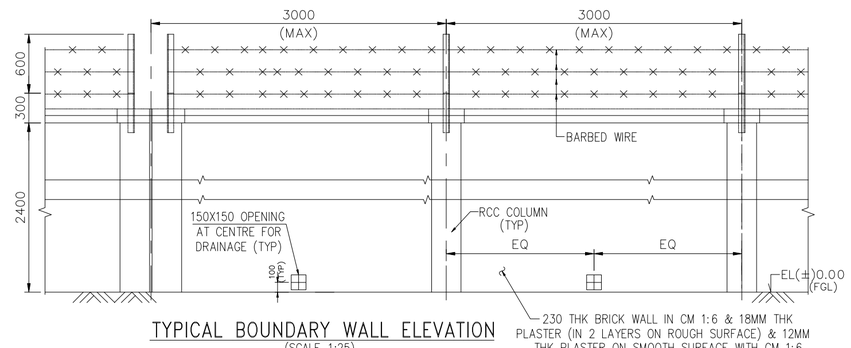


TYPICAL BOUNDARY WALL ELEVATION
(SCALE 1:25)


230 THK BRICK WALL IN CM 1:6 & 18MM THK PLASTER (IN 2 LAYERS ON ROUGH SURFACE) & 12MM THK PLASTER ON SMOOTH SURFACE WITH CM 1:6

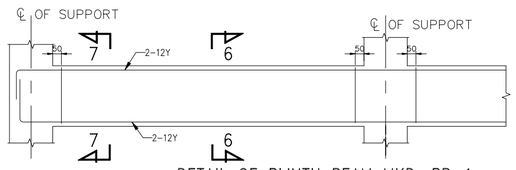


DETAIL OF PLINTH BEAM MKD. PB-1
(SCALE 1:25)

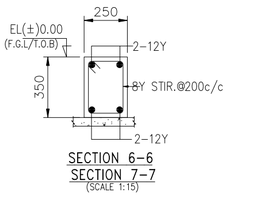

SECTION 6-6
SECTION 7-7
(SCALE 1:15)

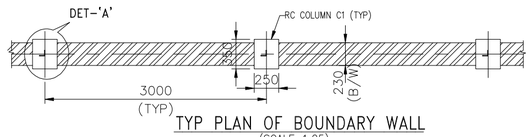

TYP PLAN OF BOUNDARY WALL
(SCALE 1:25)

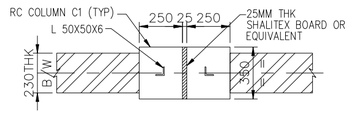


DETAILS OF EXPANSION JOINT
(SCALE 1:25)


SL.NO.	DESCRIPTION	QTY. (cum)
1	RCC	451.35
2	PCC	76.5

NOTES:


1. Gate location will be finalised after vastu consultation.




DETAIL-'A'
(SCALE 1:15)



SECTION 4A-4A
(SCALE 1:15)




SECTION 2-2
(SCALE 1:15)




SECTION 5-5
(SCALE 1:15)


DETAIL OF FDN. MKD. F4
(SCALE 1:25)

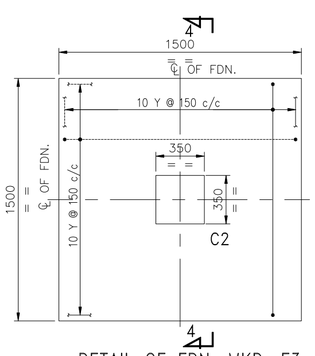

DETAIL OF FDN. MKD. F3
(SCALE 1:25)

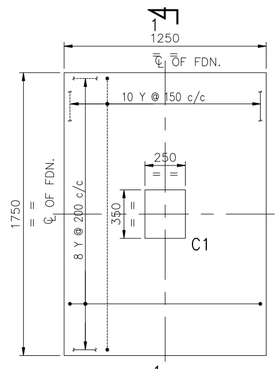


DETAIL OF FDN. MKD. F1
(SCALE 1:25)

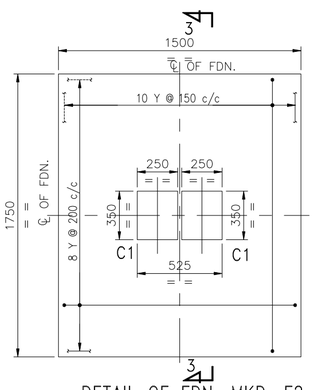


DETAIL OF FDN. MKD. F2
(SCALE 1:25)


SECTION 5A-5A
(SCALE 1:25)

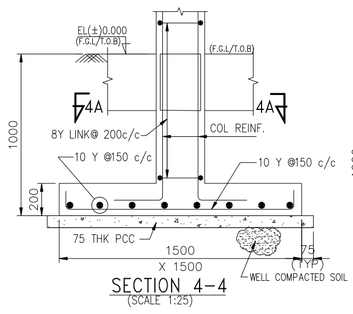

SECTION 4-4
(SCALE 1:25)

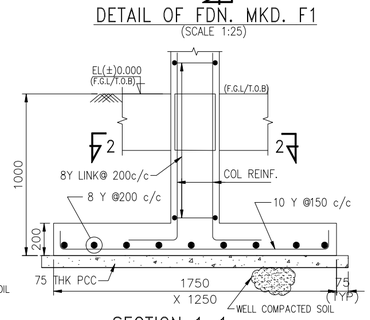

SECTION 1-1
(SCALE 1:25)

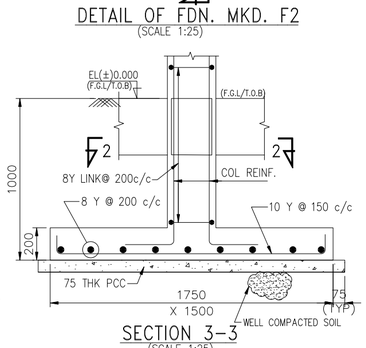

SECTION 3-3
(SCALE 1:25)

LEGEND

TYP-	TYPICAL
UN-	UNLESS NOTED
FGL-	FINISHED GROUND LEVEL
UN-	UNLESS NOTED
TOC-	TOP OF CONCRETE
T	TOP REINFORCEMENT
B	BOTTOM REINFORCEMENT
DET-	DETAIL
TOBW-	TOP OF BRICK WORK
BOF	BOTTOM OF FOOTING
B/W	BRICK WORK
DIV	DIVISION
RENF	REINFORCEMENT
BF	BOTH FACF

SL.NO	DATE	DESCRIPTION	REV.NO	NAME

CHECKED BY	SIGN	DATE
ARCHITECTURE		
CIVIL & STRUCTURAL		
PLUMBING & SANITARY		
MECHANICAL		
ELECTRICAL		
INSTRUMENTATION		

LLOYDS METALS & LLOYDS METALS & ENERGY LIMITED

JOB No. : .

	NAME	SIGN	DATE
DSGN	ARH		19.01.22
DRWN	MDO		19.01.22
CHKD	NKY		19.01.22
APPD	ASM		19.01.22

TITLE :

GA AND RCC DETAIL OF FRONT BOUNDARY WALL (TYPE-1) FOR KONSARI PROJECT.

SCALE 1:4

PROJECTION

DRG. No. 2021022-A00-CV-0002

SHEET 1 OF 1

SH. SIZE A1

REV. R0