


DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUMPER SIZE (OPTIONAL)
	2030	2720	480	400	200X300X100


PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2080	2770	485	

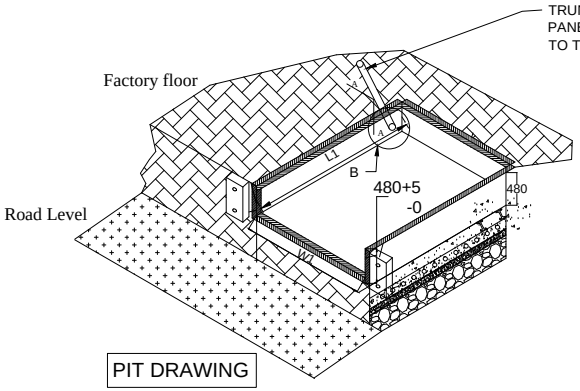


PIT DRAWING





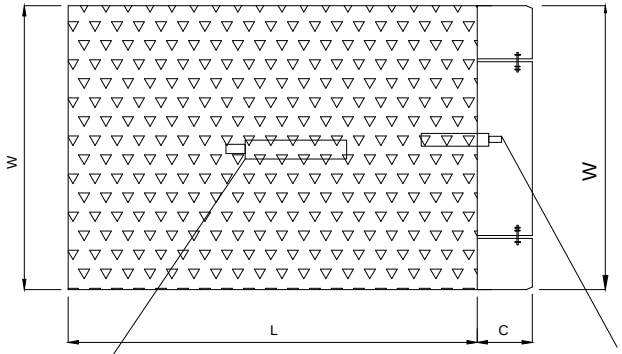

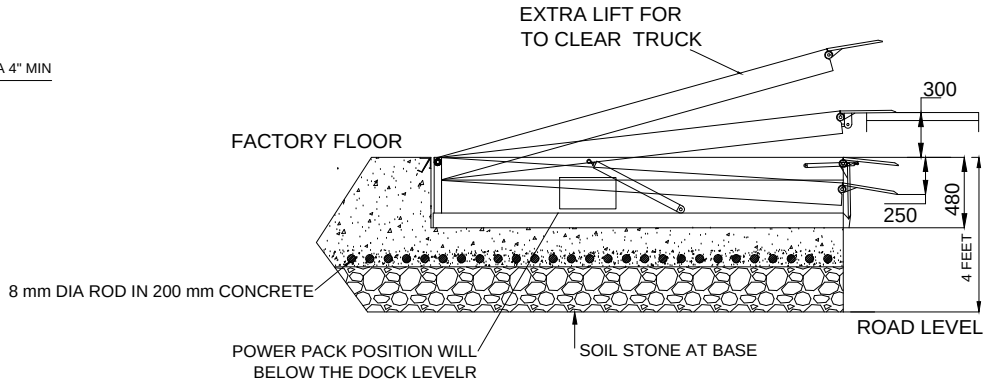

NOTE: -

1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 7000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KG FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUFFERS SHOULD BE MADE AS PER BUFFER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE ± 15 MM

DOCK LEVELER- 06 TON CAPACITY -

CLIENT APPORVAL-			NIHVA TECHNOLOGY PVT. LTD. PUNE Tel : 020 66304033 Email:- info@nihva.com Website:- www.nihva.com
	DATE	SIGN.	NIHVA TECHNOLOGIES PVT. LTD.
DRAWN :- ANIL K.	08/07/2016		CLIENT - EMERSON
CHECKED :- ANIL	08/07/2016		PROJECT - EMERSON
ALL DIMENSION ARE IN mm			SITE -
If any queries contact : projects@nihva.com			DWG. NO. - NIHVA/16-17/0036