NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

Systematic Conscom Ltd. (SCL)
Noida, UP

Date : 06.06.2024
Quote NO : RR_24.25.0029R2
Kind Attn : Mr. Gagandeep Saluja
Email Id : Gagandeep.Saluja@motherson.com
Contact No: 9654592547

Project Name & Location: Vrindavan Temple

Subject : Commercial Offer for Automatic Retractable Roof

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.
This has reference to your above mentioned requirement, please find below our Solutions.


Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	1
C.	General Conditions	2
D.	Terms & Condtions	2


A) Commercial Offer

Sr No	Description	Size (mtr)	Qty		
			(Nos)	Unit Rate	Total
1	**Automatic Retractable Roof**	• 7400 X 21000 • 4 Panels • Opening - As per your drawing • Installation Inclusive • With SS Frames	1	45,42,000	**₹ 45,42,000**
2	GST Extra @ 18%		18%		8,17,560
3	P&F Charges @ 3%		3%		1,36,260
4	Transportation Charges				65,000
5	Unloading Charges @ Site				10,000
6	Material Shifting Charges @ Site				40,000
7	Height/ Crane arrangement				30,000
			Gross Amount		**₹ 56,40,820**

B) Technical Specification

1. Polycarbonate Compact Clear/Embossed 3.0 mm Thick
2. Profile : SS
3. Guide : SS Guide
4. Interlocking
5. Motor Mechanism with control panel **a) 2 Remote Controlled** **b) Single Phase Bi-directional Motor** **c) Speed- 09-12m/min** **d) Power- As per Roof Dimension** **e) Mechanical Limit Switch** **f) Rack and Pinion Arrangement**
6. EPDM Gaskets and sealants
7. SS Fastners

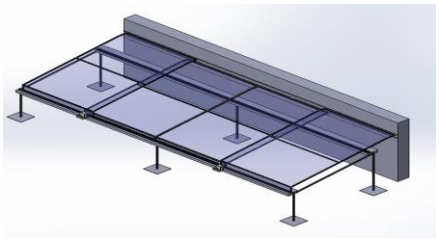

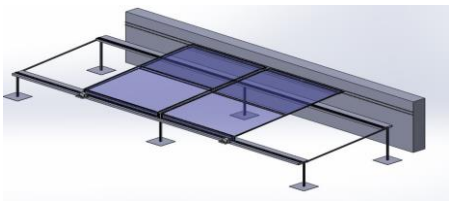

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1. Continuous uninterrupted access to installation section or as agreed seperately.
2. Provision of 230 V power supply for hand tools.
3. A dry and secure area, not in direct sunlight is to be provided for storage of product component
4. Access to site between 7 am to 8 pm should be provided.
5. Any storage costs for material due to delay outside of NIHVA, will be in client scope.
6. The project time indicated does not take into account adverse weather conditions that may prevent safe and efficient working practice. We reserve the right to extend the period accordingly.
7. Installation will start after receiving of Site Readiness Photographs or written Email communication.
8. We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readiness Confirmation.
9. For any reason if we need to stop our installation and demobilize the team without completing the work, then extra cost will be applicable for Remobilizing the Team.
10. If any change in dimension on actual site, quoted price will affect accordingly which will be in client scope.
11. After 1 year warranty, Non comprehensive AMC will be provided by NIHVA at an additional cost.

Note: Please find below List which are in Client Scope

Sr. No	Points	Remark
1	Secured and fully covered Store area	Should be provided by client
	Safely Material Keeping in that Area	In NIHVA Scope
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site.	In NIHVA Scope
3	One point of input single phase supply	Should be provided by client
	From that supply point to terrace area or roof mounting area- supply cable and electical point	In NIHVA Scope
4	Any civil / masonry/structural work required.	In Client Scope
5	In Case of any changes in the layout as per site requirements after the shipment of material, the additional quantities and wastage	NIHVA should be provided with extra cost
6	Conduits, Cables required	In NIHVA Scope

D) Terms & Conditions

Price : Ex Works Pune.

Delivery : 8-10 weeks from the date of receipt of confirmed Purchase Order, Advance Payment & Drawing Approval.

Payment : 70% Advance along with Confirmed Purchase Order.
25% After material Delivery at site.
5% After Installation.

Validity : Validity of offer is 15 days from the date of quotation.

Warranty : 12 months from the date of supply. It only covers damage caused due to mechanical system not due to natural calamity.

With Best Regards
Vijayshri J
8530872333
NIHVA Technologies Pvt Ltd