NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

LANDSKY ALLIED INDUSTRIES PVT. LTD
(A Division of Landsky Group)
Plot No.35-69, 2nd Floor, G K Colony,
Sainikpuri Post Secunderabad - 500 094, Telangana, India

Date : 16.02.2021
Quote NO : SQT.20.21.3027
Kind Attn : Chandra Kanthi. G
Email Id : business@landskyallied.com
Contact No: 9100917096

Project Name & Location: Secunderabad

Subject : Quotation for ASSA ABLOY Make Dock Leveler ,Dock Shelter & Sectional Door (High Sea Sale)

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions. This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2
C.	General Conditions	3
D.	Terms & Condtions	3

A) Commercial Offer - Price in High Sea Sale (Custom Duty + Custom Clearance + Local Transport will be in Client Scope)

Sr No	Description	Size		Qty	Supply Charges in INR		Installation Charges in INR	
		Clear Width (mm)	Clear Length (mm)	(Nos)	Unit Price	Total Amount	Unit Price	Total Amount
1	**ASSA ABLOY Make Dock Leveler - DL6010S**	2000	3000	4	420000	1,680,000	20,000	80,000
2	**ASSA ABLOY Make Inflatable Dock Shelter - DS6070B**	3600	4000	4	475000	1,900,000	20,000	80,000
				Total		**3,580,000**		**160,000**
	P&F Charges			3%		**107,400**		
	Total Without Taxes					**3,687,400**		**160,000**
	GST Extra @ 18%			18%		663,732		28,800
	Total With Taxes					**4,351,132**		**188,800**
	Transportation Charges					**Extra at actual**		
	Unloading Charges @ Site					**In client scope**		


NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

ASSA ABLOY Make Dock Leveler DL6010S - 7 TON

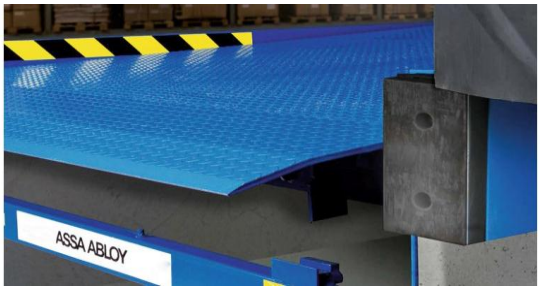

Sr. No	Description	Specifications
1	**Nominal Width**	2000 mm
2	**Nominal Length**	3000 mm
3	**Leveller Height**	700 mm
4	**Load Capacity**	70 kN
5	**Leveller Surface Treatment**	RAL 5010 (Gentian Blue)
6	**Leveller Paint class**	80 µm
7	**Lip Material**	Steel
8	**Lip Length**	400 mm
9	**Tearplate Thickness**	6 mm
10	**Control Box**	950 LA
11	**Free space under lip**	205
12	**Lip Bevellment**	100 mm
13	**Control System**	Mains Switch

ASSA ABLOY Make Inflatable Dock Shelter - DS6070 B



Sr. No	Description	Specifications
1	**Nominal Width**	3600 mm
2	**Nominal Height**	4555 mm
3	**Free Height**	4000 mm
4	**Nominal Depth**	770 mm
5	**Side Curtain Length**	650 mm
6	**Front Plate Colour**	RAL 9010
8	**Operator**	Control Unit

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2008 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

Note: Please find below List which are in Client Scope

Sr. No	Description	
1	Secured and fully covered Store area to keep the material	In client scope
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site	In client scope
3	Electrical Supply on the site single phase/three phase points at different places.	In client scope
4	Any civil / masonry/structural work required	In client scope
5	All structure support required	In client scope
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.	In client scope
7	Conduits, Cables required	In client scope

D) Terms & Conditions

Price : Ex Works Pune

Delivery : 10-12 weeks from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

Payment : 80% Advance along with Confirmed Purchase Order & Balance before dispatch.

Validity : Validity of Offer is 15 days from the date of quotation

Warranty : 12 months from the date of supply.

For any further Clarification /Information in this Concern, Please feel free to Contact **Mr. Shrikant Mirkute on 8551098333**

With Best Regards
Pradeep Shinde
8551096333
For NIHVA Technologies Pvt Ltd