A1 DO NOT SCALE DRAWING. CHECK ALL DIMENSIONS ON SITE.
ALL RIGHTS RESERVED.
INTEGRATED DESIGN ASSOCIATES INDIA PVT. LTD.

## LEGENDS - WALL

| | | |
|---|---|---|
| W_01 | | 200 MM THK. BLOCKWORK (1hr. Fire Rated) |
| W_02 | | 200 MM THK. BLOCKWORK (Non Fire Rated) |
| W_03 | | 100 MM THK. BLOCKWORK (Non Fire Rated) |
| W_04 | | 120 MM THK. PRECAST |

## DOOR SCHEDULE

| Type Mark | Frame Width | Frame Height | Louvers | Count |
|---|---|---|---|---|
| D01 | 750 | 2100 | No | 1 |
| D02 | 1000 | 2100 | No | 1 |
| D03 | 1000 | 2100 | No | 4 |

## WINDOW SCHEDULE

| Type Mark | Frame Width | Frame Height | Sill Height | Count |
|---|---|---|---|---|
| V01 | 600 | 750 | 1350 | 1 |
| W01 | 1000 | 1150 | 950 | 1 |
| W02 | 1200 | 1150 | 950 | 1 |
| W03 | 1500 | 1150 | 950 | 3 |
| W04 | 2000 | 1150 | 950 | 1 |

## FINISHING SCHEDULE

| Number | Name | Area | Wall Finish | Floor Finish | Ceiling Finish | Base Finish | Remarks |
|---|---|---|---|---|---|---|---|
| GL GROUND FLOOR | | | | | | | |
| GH-GL-01 | SECURITY CHECK | 43 m² | 101 | 203 | 302 | 403 | |
| GH-GL-02 | TOILET | 2 m² | 101 | 206 | 302 | 502 | Wall Paint to be above 2100mm Height |
| GH-GL-03 | SECURITY CABIN | 15 m² | 101 | 204 | 302 | 403 | |
| L1 TERRACE LEVEL | | | | | | | |
| GH-L1-01 | TERRACE | 72 m² | 101 | 210 | - | 401 | |


NORTH

**GENERAL NOTES:**


- Architectural Drawing shows equipment space holders only, for equipment layout please refer to individual service drawing.
- Refer Structural Drawings for Plinth Setting out
- For Boom Barrier, Mechanical Bollards and Security gates, kindly refer to seperate drawings (By Others)
- For door/window/louver details and schedules, refer to detail drawing.

## LEGEND - FINISHES

| | |
|---|---|
| **WALL FINISHES** | |
| 101 | OIL BASED DISTEMPER |
| 103 | TEXTURE PAINT |
| **FLOOR FINISHES** | |
| 203 | KOTA STONE FLOORING |
| 204 | VITRIFIED TILE FLOORING |
| 206 | ANTI-SKID CERAMIC TILE FLOORING |
| 210 | CEMENT BASED TERRACING |
| 211 | CONCRETE PAVERS |
| **CEILING FINISHES** | |
| 302 | PAINTED SOFFIT |
| **MISCELLANEOUS FINISHES** | |
| 401 | CEMENT BASED HARDENER SKIRTING |
| 403 | KOTA STONE SKIRTING |
| 502 | GLAZED CERAMIC WALL TILES |

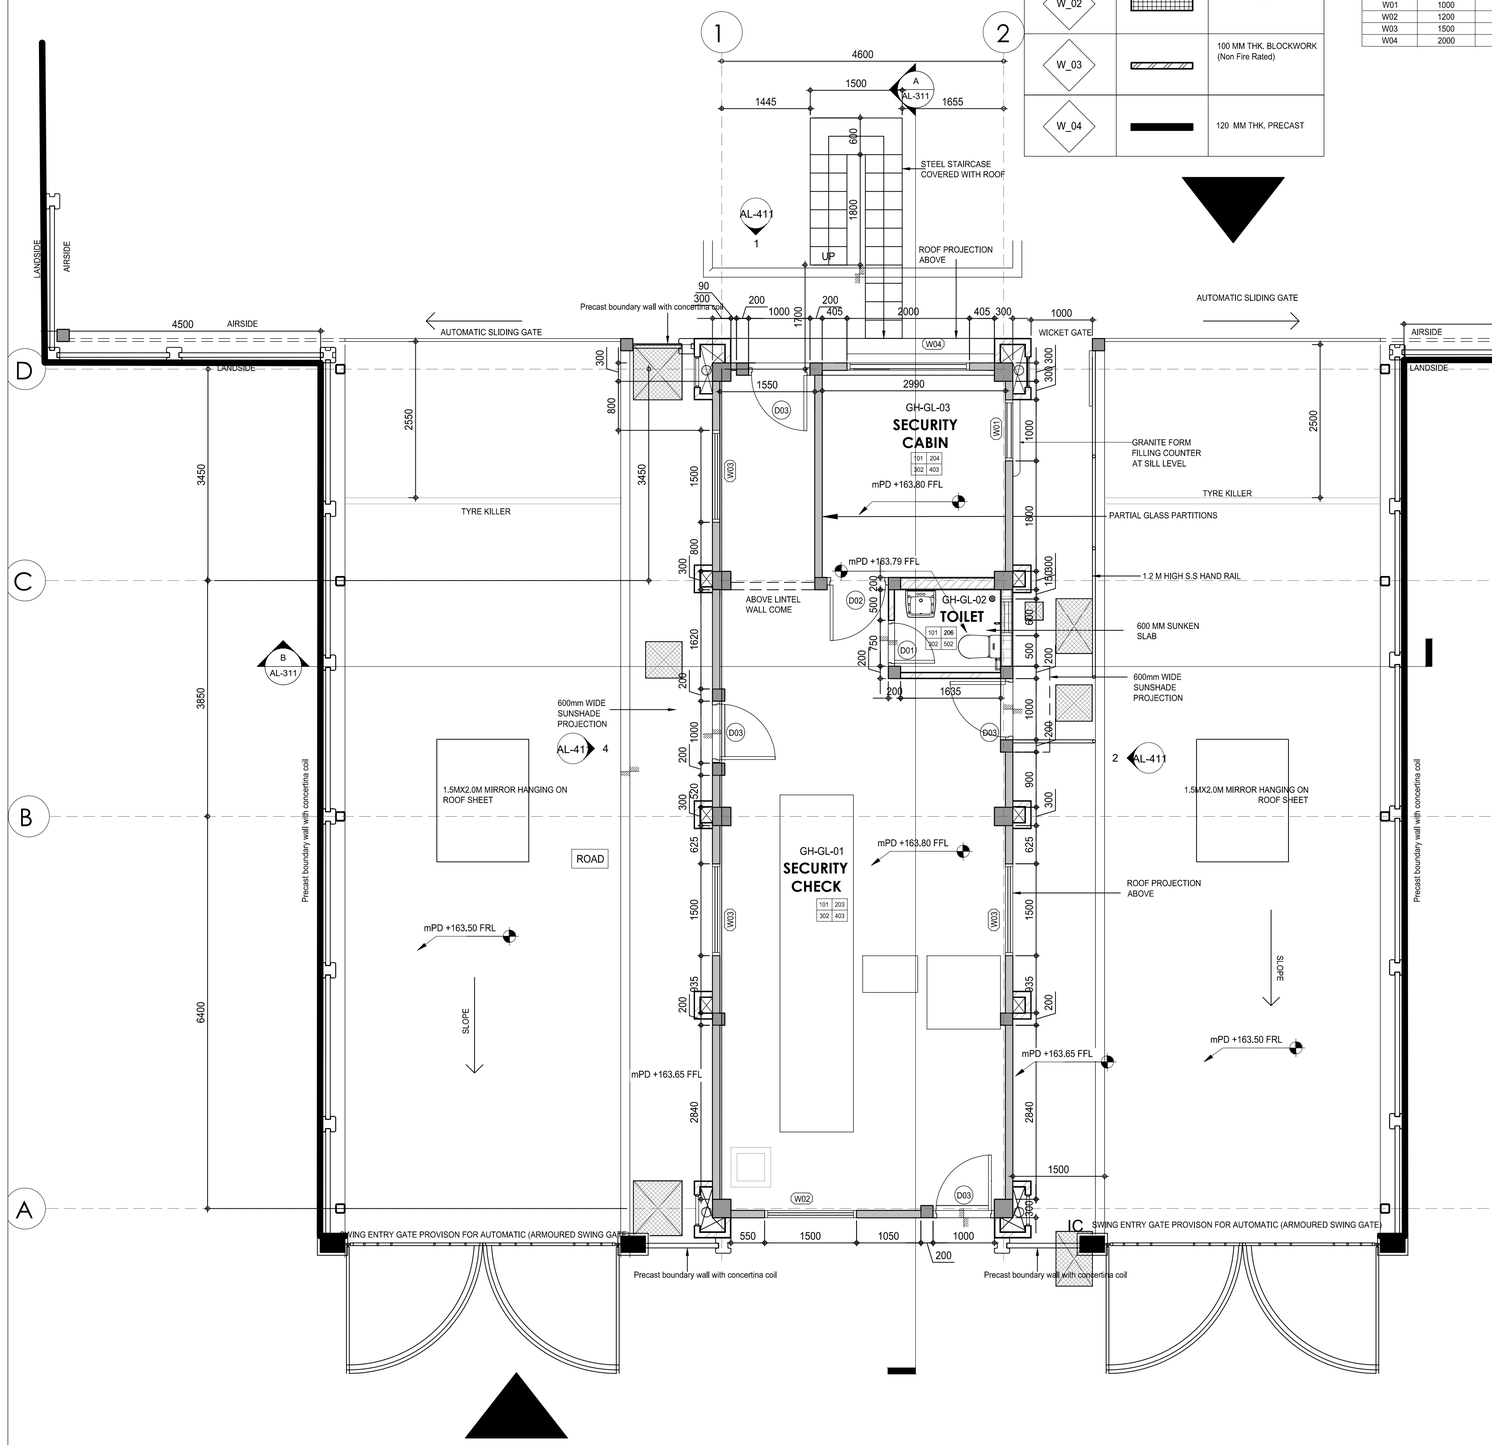


1 GL GROUND FLOOR
ENTRY
SCALE: 1 : 50

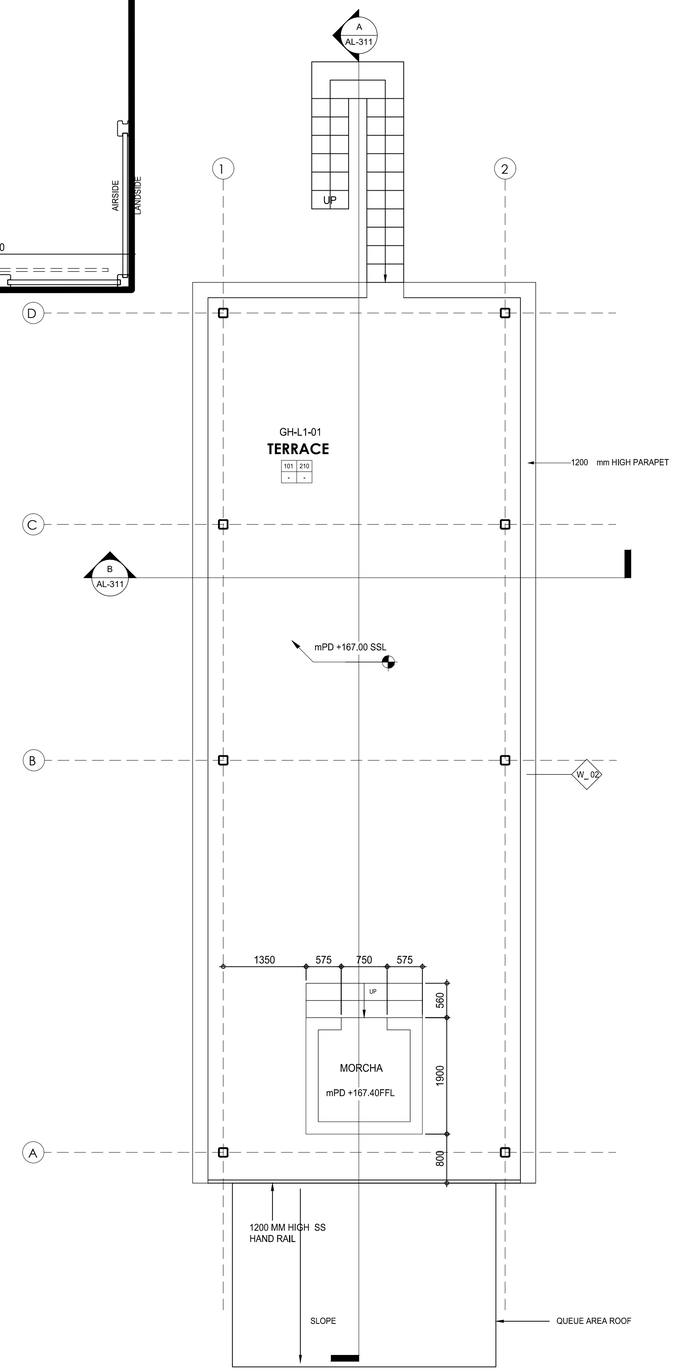


2 L1 TERRACE LEVEL
SCALE: 1 : 50

SCALE - 1 : 50

| REV | DATE | DESCRIPTION |
|---|---|---|
| R4 | 03.06.2022 | UPDATED AS PER AAI REQUIREMENT |
| R3 | 20.01.2022 | BLOCKWALL CHANGES TO PRECAST WALL |
| R2 | 28.10.2021 | FLOOR AREA INCREASED AS PER CLIENT REQUIREMENT |
| R1 | 29.07.2020 | FLOOR AREA INCREASED AS PER CLIENT REQUIREMENT |
| R0 | 11.11.2019 | GOOD FOR CONSTRUCTION |

| | NAME | SIGN | DATE |
|---|---|---|---|
| DSGN | KN | | |
| DRWN | KN | | |
| CHKD | HM | | |
| APPD | AC | | |

KEY PLAN:
SCALE - 1:25000
NORTH
SECURITY GATE HOUSE-1

PROJECT:
**GREENFIELD INTERNATIONAL AIRPORT AT MOPA, GOA**

CLIENT:
**GMR GOA INTERNATIONAL AIRPORT LIMITED**

EPC CONTRACTOR:
**MEGAWIDE CONSTRUCTION DMCC**

ARCHITECTURAL CONSULTANT:
**INTEGRATED DESIGN ASSOCIATES INDIA PVT. LTD.**
c/o Asit Mehta & Associates,
5th Floor, Midas Chambers, Off New Link Road
Andheri West, Mumbai - 400053
Maharashtra, India

STRUCTURAL CONSULTANT:
**SY^2 + ASSOCIATES, Inc.**
9801 Kamagong Street
Makati Philippines.

MEP CONSULTANT:
**ESKAYEM**
CONSULTANTS PVT. LTD.
301, 3RD FLOOR, SWASTIK CHAMBERS,
C.S.T. ROAD, CHEMBUR, MUMBAI-400071
TEL 022-25282645/46/47

PACKAGE:
**SECURITY GATE HOUSE 1 (CARGO COMPLEX)**

TITLE:
**GROUND FLOOR LEVEL & TERRACE LEVEL PLAN**

DRAWING NO.:
**GGIAL-MW-GH1-AR-10-AL-011**

| FILE REF.: | DATE : | |
|---|---|---|
| | 03.06.2022 | |
| RELEASED FOR: | SCALE: | SIZE: / REV: |
| GFC | 1 : 50 | A1 / R4 |

USER: INTEGRATED DESIGN ASSOCIATES LTD.