



LOCATION - COLLEGE MAIN ENTRANCE

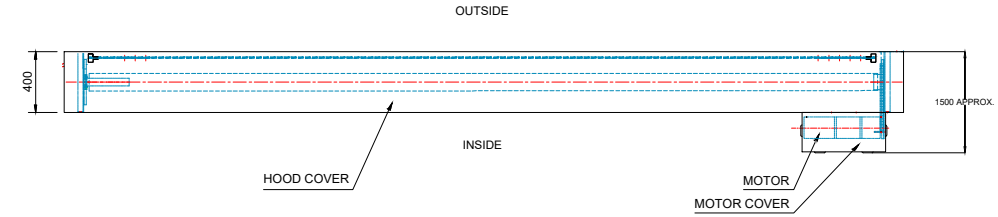



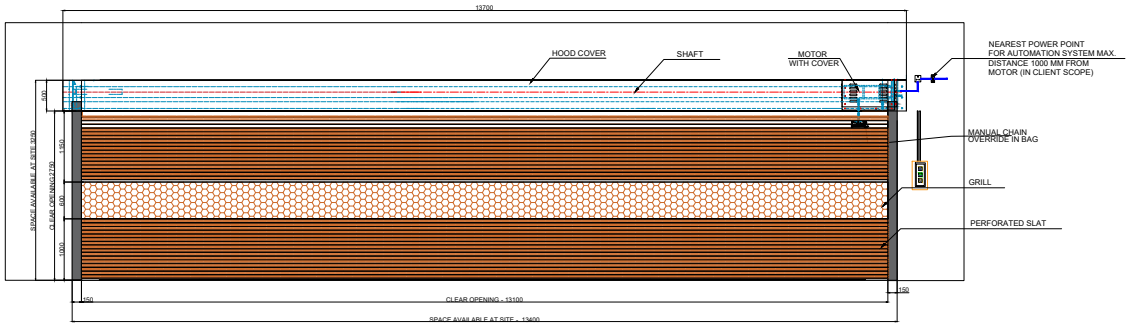



TECHNICAL SPECIFICATION:-

SR.	SPECIFICATION	DETAILS
1.	DESCRIPTION & DRIVE	MOTORIZED ROLLING SHUTTER (INDIRECT DRIVE) SPROCKET CHAIN ARRANGEMENT.
2.	LOCATION AREA	INSIDE
3.	MOUNTING SURFACE	SIDE BRACKETS: OPTIONAL+ON CONCRETE/STEEL&SIDE
4.	SLAT	75 MM GI SHEET - 1.2 MM THICK
5.	BOTTOM PROFILE	M.S. PLATE 100MMX2.5MM THICK WITH ANGULAR STIFFENER.
6.	GUIDE PROFILE	M.S." T " SHAPE 150X3 MM THICK.
7.	HOOD COVER & MOTOR COVER	MADE OF GI SHEET THICKNESS 0.9 MM.
8.	COLOUR	TWO COATS OF EPOXY PAINT RAL9003
9.	PUSH BOTTON	3 WAY PUSH BUTTON ON SINGLE SIDE

SHUTTER SIZES :-

SR.	CLEAR WIDTH	CLEAR HEIGHT	QTY.
01	13100 mm	2750 mm	01

NOTE :-

1. All DIMENSIONS ARE IN MM.
2. HIGH LEX BOARD / INTERIOR SHEET/ PUFF PANEL REMOVER OR CUTTING IN CLIENT SCOPE

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE :- MOTORISED ROLLING SHUTTER

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	DATE
DRAWN	B.S.	08/10/2025
CHECK & APPROVAL	V.T.	08/10/2025

CLIENT - KLE Hospital

PROJECT - MOTORISED ROLLING SHUTTER

FORMAT NO - NIHVA-DD-F-03

DWG. NO. : NIHVA/24-25/GB/1109001 REV-00

SCALE: NTS WT: SHEET: 01 OF 01

ALL DIMENSION ARE IN mm

If any queries contact : design@nihva.com