IN CASE OF DOUBT ASK.

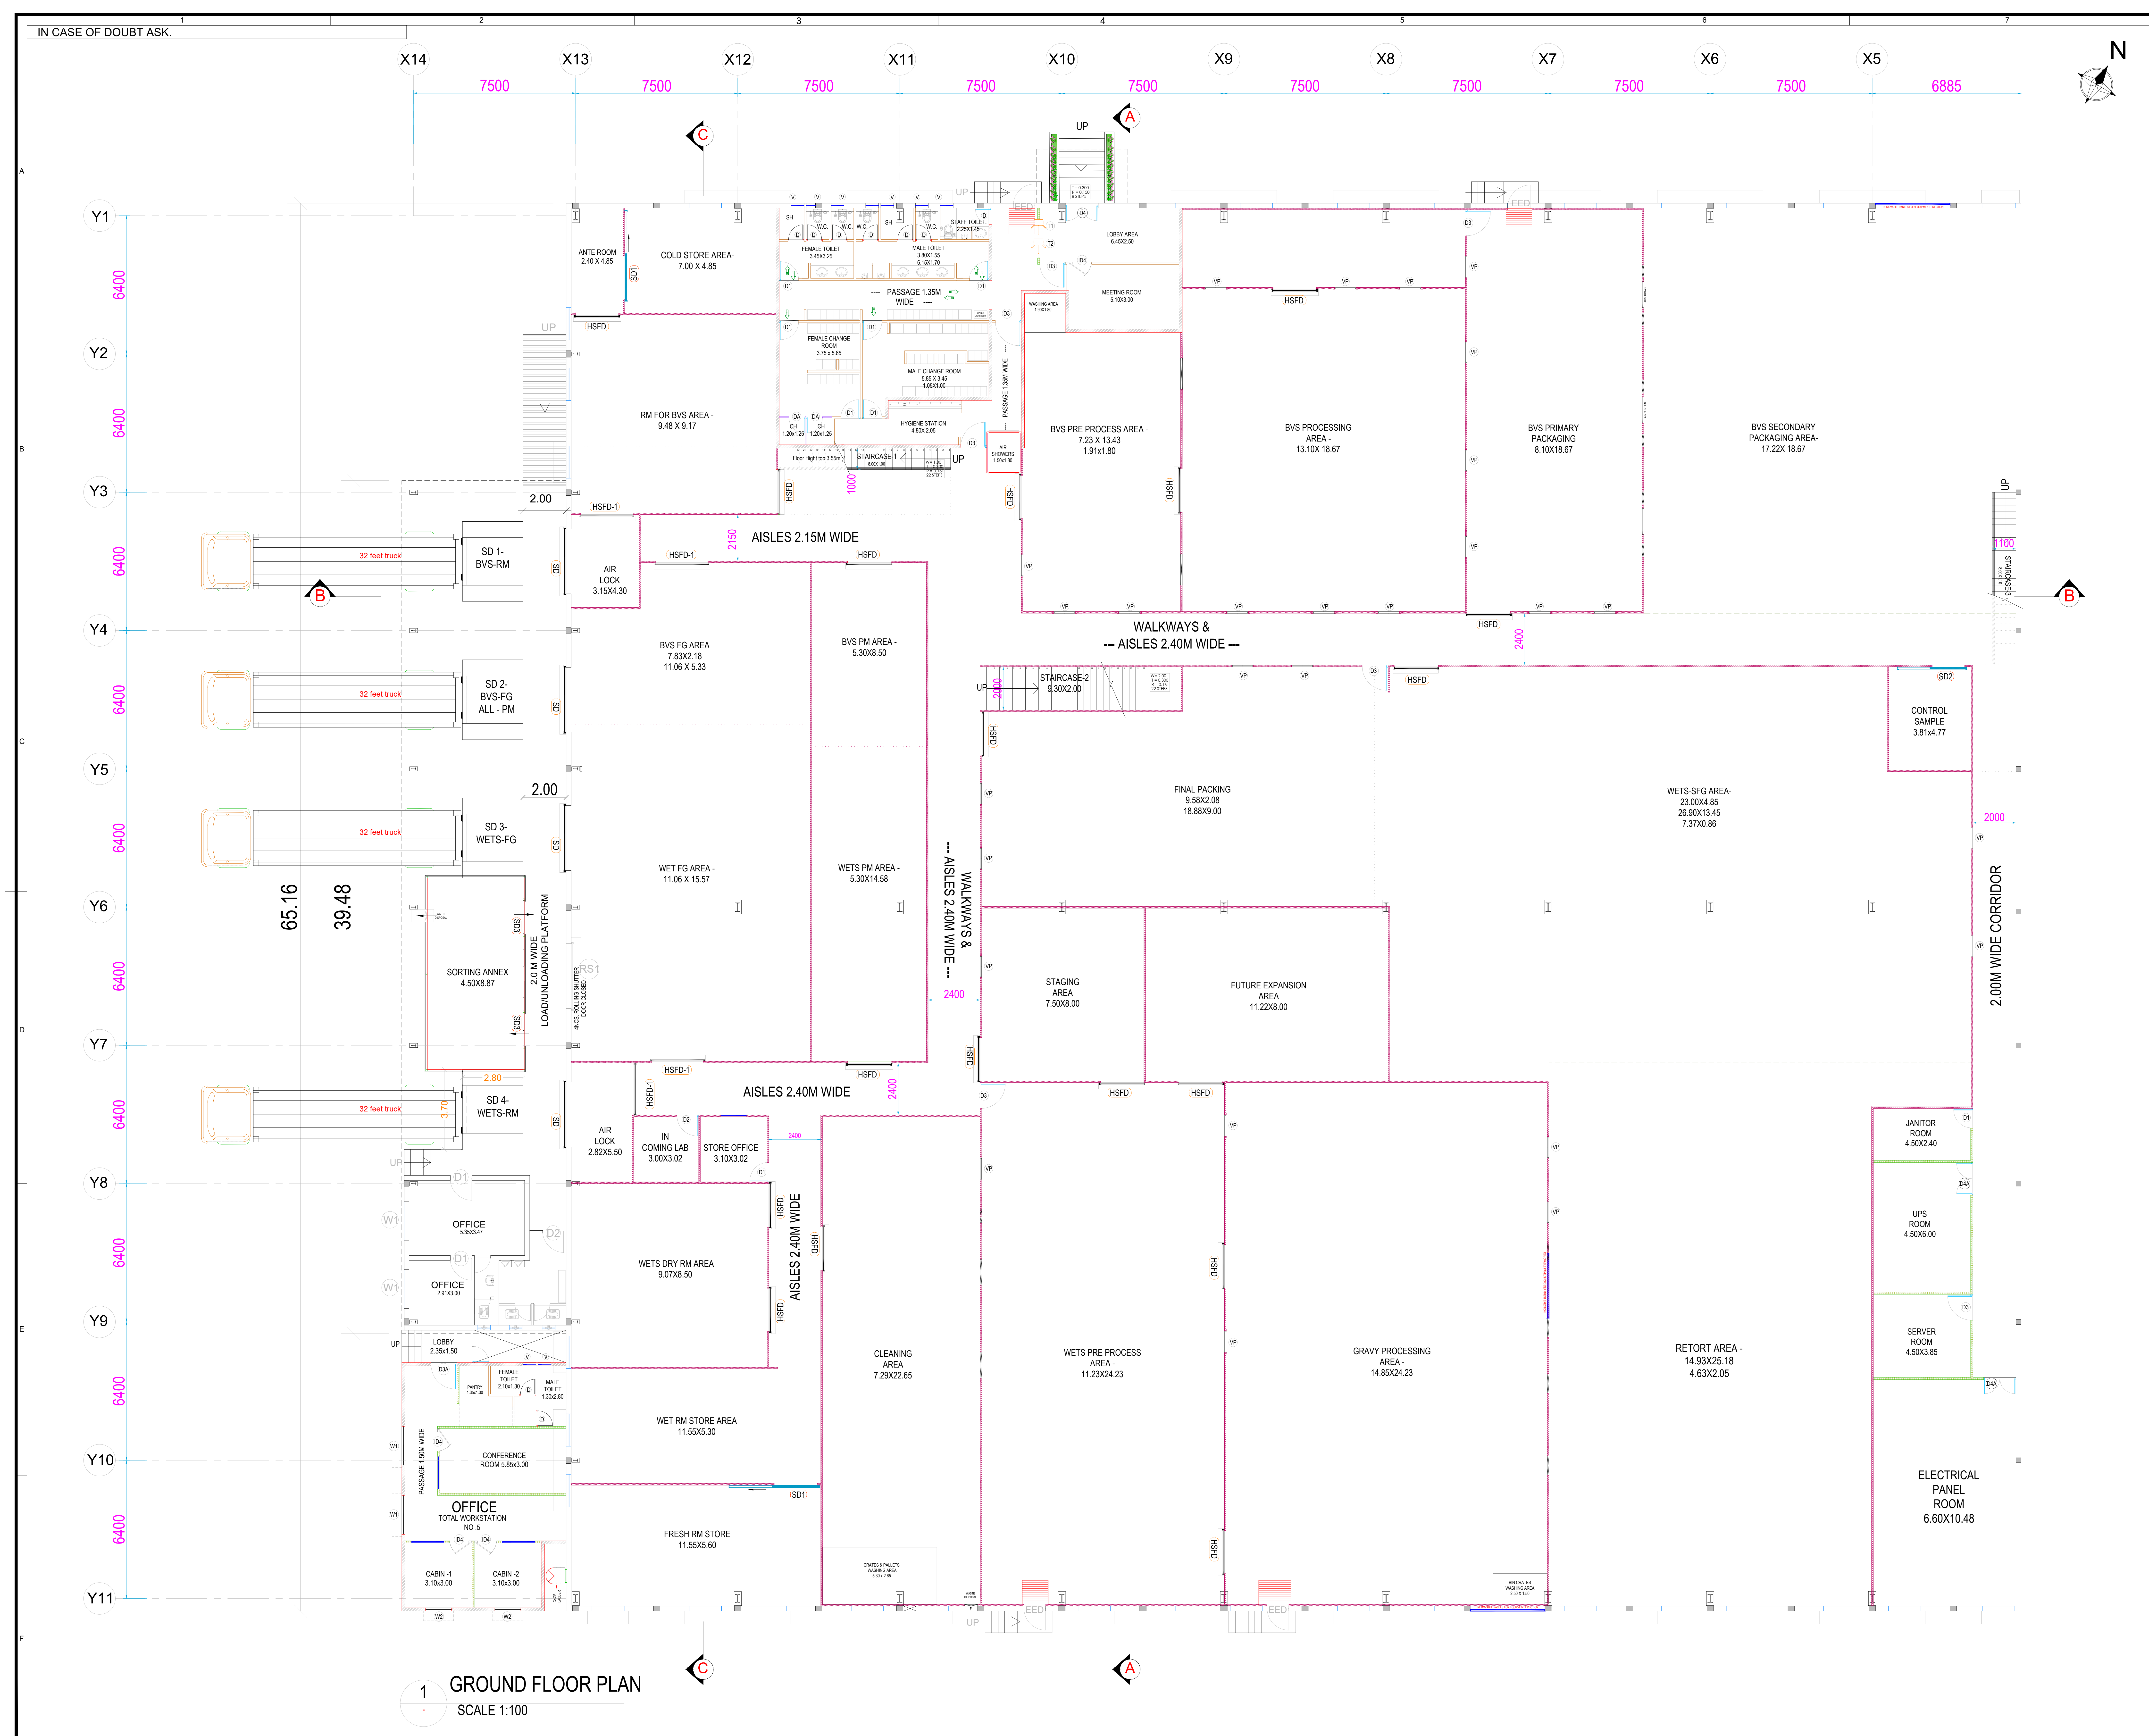
X14
X13
X12
X11
X10
X9
X8
X7
X6
X5
7500
6885
Y1
Y2
Y3
Y4
Y5
Y6
Y7
Y8
Y9
Y10
Y11
6400
N
A
B
C
UP
ANTE ROOM 2.40 X 4.85
COLD STORE AREA- 7.00 X 4.85
SD1
FEMALE TOILET 3.45X3.25
MALE TOILET 3.80X1.55 6.15X1.70
STAFF TOILET 2.25X1.45
SH
W.C.
T = 0.300 R = 0.150 8 STEPS
LOBBY AREA 6.45X2.50
MEETING ROOM 5.10X3.00
WASHING AREA 1.90X1.80
---- PASSAGE 1.35M WIDE ----
FEMALE CHANGE ROOM 3.75 x 5.65
MALE CHANGE ROOM 5.85 X 3.45 1.05X1.00
HYGIENE STATION 4.80X 2.05
CH 1.20x1.25
DA
D1
D3
D4
ID4
T1
T2
STAIRCASE-1 8.00X1.00
Floor Hight top 3.55m
W= 1.00 T = 0.300 R = 0.161 22 STEPS
1000
PASSAGE 1.35M WIDE
AIR SHOWERS 1.50x1.80
RM FOR BVS AREA - 9.48 X 9.17
HSFD
HSFD-1
2.00
AISLES 2.15M WIDE
2150
AIR LOCK 3.15X4.30
BVS PRE PROCESS AREA - 7.23 X 13.43 1.91x1.80
BVS PROCESSING AREA - 13.10X 18.67
BVS PRIMARY PACKAGING 8.10X18.67
BVS SECONDARY PACKAGING AREA- 17.22X 18.67
VP
STAIRCASE-3
1100
WALKWAYS & --- AISLES 2.40M WIDE ---
2400
32 feet truck
SD 1- BVS-RM
SD 2- BVS-FG ALL - PM
SD 3- WETS-FG
SD 4- WETS-RM
SD
BVS FG AREA 7.83X2.18 11.06 X 5.33
BVS PM AREA - 5.30X8.50
WET FG AREA - 11.06 X 15.57
WETS PM AREA - 5.30X14.58
--- AISLES 2.40M WIDE --- WALKWAYS &
STAIRCASE-2 9.30X2.00
2000
FINAL PACKING 9.58X2.08 18.88X9.00
WETS-SFG AREA- 23.00X4.85 26.90X13.45 7.37X0.86
CONTROL SAMPLE 3.81x4.77
SD2
2.00M WIDE CORRIDOR
STAGING AREA 7.50X8.00
FUTURE EXPANSION AREA 11.22X8.00
65.16
39.48
SORTING ANNEX 4.50X8.87
2.0 M WIDE LOAD/UNLOADING PLATFORM
2.80
3.70
AISLES 2.40M WIDE
AIR LOCK 2.82X5.50
IN COMING LAB 3.00X3.02
STORE OFFICE 3.10X3.02
D2
OFFICE 5.35X3.47
OFFICE 2.91X3.00
W1
W2
LOBBY 2.35x1.50
D3A
PANTRY 1.35x1.30
FEMALE TOILET 2.10x1.30
MALE TOILET 1.30x2.80
CONFERENCE ROOM 5.85x3.00
PASSAGE 1.50M WIDE
OFFICE TOTAL WORKSTATION NO .5
CABIN -1 3.10x3.00
CABIN -2 3.10x3.00
CAGE LADDER
WETS DRY RM AREA 9.07X8.50
AISLES 2.40M WIDE
WET RM STORE AREA 11.55X5.30
FRESH RM STORE 11.55X5.60
CLEANING AREA 7.29X22.65
CRATES & PALLETS WASHING AREA
WETS PRE PROCESS AREA - 11.23X24.23
GRAVY PROCESSING AREA - 14.85X24.23
BIN CRATES WASHING AREA
RETORT AREA - 14.93X25.18 4.63X2.05
JANITOR ROOM 4.50X2.40
UPS ROOM 4.50X6.00
SERVER ROOM 4.50X3.85
ELECTRICAL PANEL ROOM 6.60X10.48
D4A
EED

1 GROUND FLOOR PLAN

SCALE 1:100

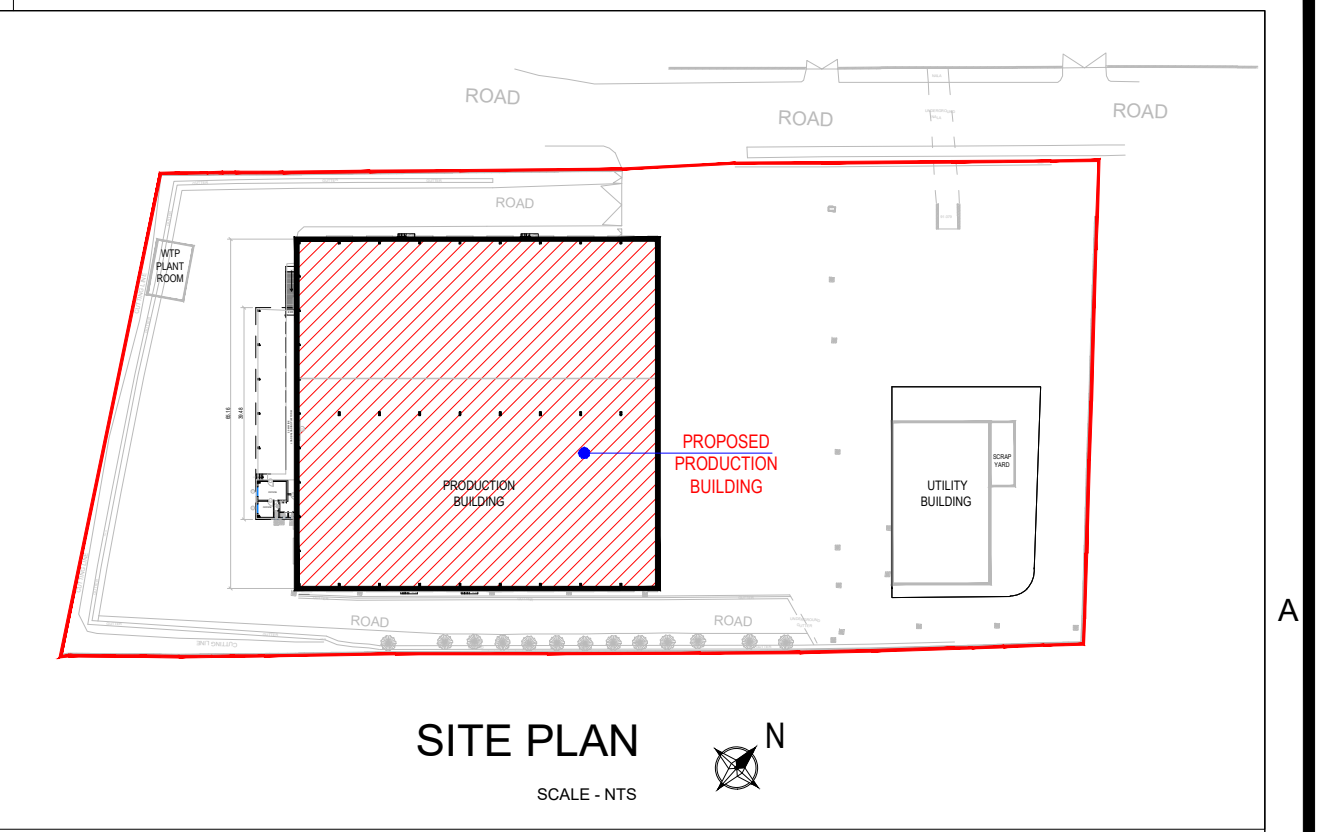

SITE PLAN

DOOR & WINDOW SCHEDULE:

DOORS:		
TYPE	SIZE	QTY.
D	750 X 2100	09 NOS.
DA	750 X 2100	02 NOS.
D1	900 X 2100	08 NOS.
D2	1000 X 2100	01 NOS.
D3	1200 X 2100	07 NOS.
D3A	1200 X 2100	01 NOS.
D4	1500 X 2400	01 NOS.
D4A	1500 X 2400	02 NOS.
ID2	900 X 2100	01 NOS.
ID4	1050 X 2100	04 NOS.
HSFD	2000 X 3000	17 NOS.
HSFD1	2400 X 3000	04 NOS.
SD	3000 X 3500	04 NOS.
SD1	2000 X 3000	02 NOS.
SD2	2000 X 3000	01 NOS.
SD3	1500 X 2400	02 NOS.
WINDOWS:		
W1	1800 X 1200	02 NOS.
W2	1500 X 1200	02 NOS.
VP	1000 X 1500	27 NOS.
VENTILATORS:		
V	600 X 900	09 NOS.

WALL LEGEND :-	
▨	80mm THK. SANDWICH PANEL
▨	100mm THK. GYPSUM PARTITIONS
▨	150mm THK. MASONRY WALL
▨	100mm THK. MASONRY WALL
▨	FALSE CEILING
▦	GRID FALSE CEILING

ALL DIMENSIONS ARE IN MM.

--

NO.	REV. DATE	DESCRIPTION	NO.	REV. DATE	DESCRIPTION
R0	30.01.2020	FOR TENDER	R7		
R1			R8		
R2			R9		
R3			R10		
R4			R11		
R5			R12		
R6			R13		

DRG. NO. 201911A_1000_ARCH_GF_PLAN_102_TEN_00_R0

CHECKED BY	DRAWN BY	SCALE	BLDG. TYPE	JOB NO.	SHEET NO.
SK	SY	1:100	GROUND FLOOR	201911A	1 OF 1

PROJECT
PROPOSED BEVERAGE AND WETS FACILITY IN SATARA MEGA FOOD PARK.

TITLE
PRODUCTION BUILDING - GROUND FLOOR PLAN

CLIENT:
FOOD SERVICE INDIA PVT. LTD.
Plot No. 1+2, Gat No. 1288/1, 1288/2, 1490/1, 1490/2
Satara Mega Food Park, Satara.
Degaon, Tal. & Dist. Satara, Maharashtra,
Pin :- 415004

E.P.C.M.

FABS®
Facilities And Building Solutions

REGIONAL OFFICE :
FACILITIES AND BUILDING SOLUTIONS PVT. LTD.
12/26, RIVER VIEW APARTMENT, 1ST FLOOR,
OFF MUMBAI-PUNE ROAD,
WAKDEWADI, PUNE-411003
Tel. ☎ +91-8087002501

HEAD OFFICE :
FACILITIES AND BUILDING SOLUTIONS PVT LTD.
#856,5TH CROSS, 5TH MAIN,
INDIRANAGAR, 1ST STAGE,
BANGALORE-560 038
Tel. ☎ +91 80 41520118 / 120