
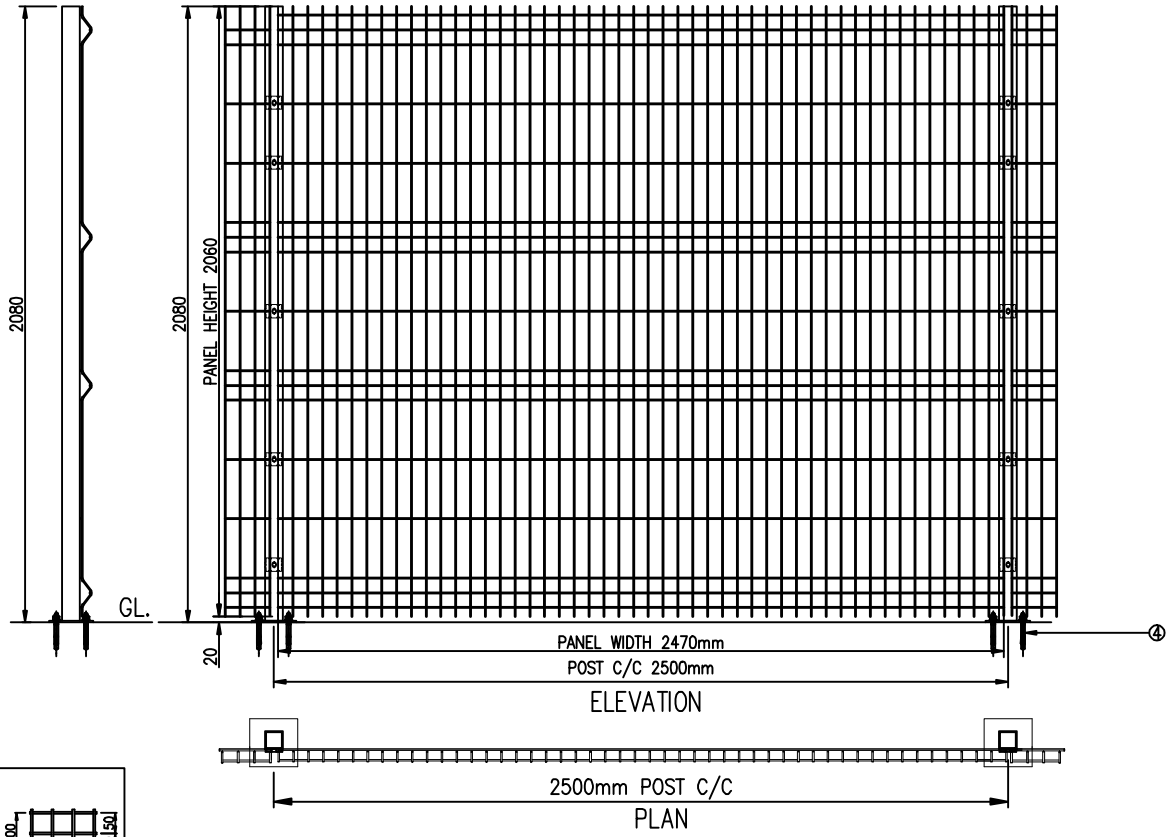


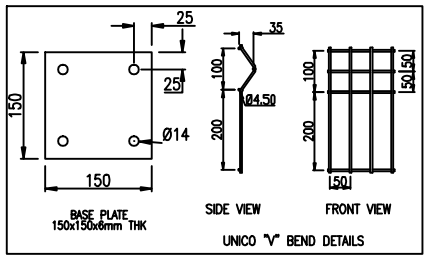

Total quantity of Panel = 13 NOS.
Total quantity of SHS Post = 13 NOS.
MOC is Galvanized Steel
Temperature sustainability around 50 deg
Colour: RAL 7044

BILL OF MATERIAL

SR.NO.	PART	SIZES	QTY.
1	WELD MESH PANEL	MESH SIZE 50x200mm, PANEL HEIGHT 2060mm, PANEL WIDTH 2470mm WIRE ø 4.50mm, WITH 4 V BENDS	1 NOS.
2	POST	SHS 60x60x2mm THK. 2080mm ABOVE THE GROUND LEVEL WITH WELDED BASE PLATE 150x150x6mm THK.	1 NOS.
3	CLAMP	SPIDER CLAMP WITH SECURITY NUT & BOLT.	5 NOS.
4	ANCHOR BOLT	M12x150mm LONG.	4 NOS.
5	BASE PLATE	150X150X6mm THK	1 NOS.

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE	FENCE DETAILS (SHS POST)		NIHVA TECHNOLOGIES PVT. LTD.
	SIGN	DATE	
DRAWN	ABHIJIT	23/06/15	CLIENT -SMS INDIA
CHECK	ANIL	23/06/15	PROJECT-TATA STEEL
ENG			SITE -JAMSHEDPUR
APPRD.			DWG. NO. -NIHVA/15-16/048
Ref. No.			SCALE:01 | WT: | SHEET:01
ALL DIMENSION ARE IN mm			If any queries contact : projects@nihva.com

NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com