

DETAIL VIEW A

NOTES:–
ALL DIMENSIONS ARE IN MM.

NOTES:–
ALL DIMENSIONS ARE IN MM.

A. ABBREVIATION

Wall Opening Width : WOW
Wall Opening Height : WOH
Frame Opening Height : FOH
Frame Opening Width : FOW
Shutter Opening Height : SOH
Shutter Opening Width : SOW

MATERIAL OF CONSTRUCTION
2HRS FIRE RATED AS PER AS 3614


FRAME : G.I. 1.60mm Sheet
SHUTTER : G.I. 1.20mm Sheet
THICKNESS : 40MM
FRAME PROFILE : 100 x 57Mm (Single Ribet)

INFILL MATERIAL : MINERAL WOOL
DENSITY 96kg/cm3

PAINT: AS PER AS APPROVED RAL SHADE
POWDER COATED (DFT 80 Microns min)

SCHEDULE OF HARDWARE

1) S.S. Ball Bearing Hinges - 8 NOS (Fire Rated) .
2) Mortise Lock with Cylinder - Yale Make -1 Nos.
3) Heavy Duty Door Closer YALE MAKE -1 Nos
4) Anchor Fastener - 8 x 80MM.
5) Vision Panel with Fire Rated Glass of Size: 200 x 300MM - Clear Glass (6MM) - 1 Nos
6) Intumescent Fire / Smoke Seal on all 3 Sides
7) Concealed Flush Tower Bolt

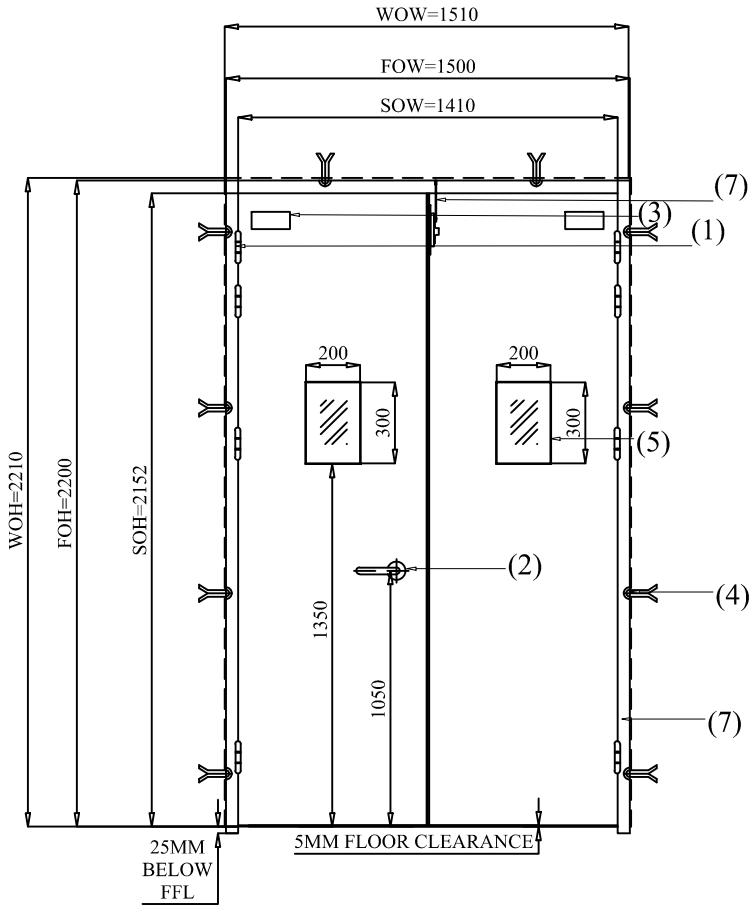

PLEASE NOTE : Wall Openings to be maintained at site

DOOR QTY = 1 NO

TOLERANCE : ±5 MM

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE - DOOR SIZE 1500 x 2100MM - S.L.				NIHVA TECHNOLOGIES PVT. LTD. PUNE Tel : 020 66304033 Email:- info@nihva.com Website:- www.nihva.com	
	NAME	SIGN	DATE		
DRAWN	P.A		23.10.19	CLIENT -	
CHECK	G.J		23.10.19	PROJECT -	
APPROVED				SITE LOCATION -	
If any queries contact:sales@nihva.com				DWG. NO. -NIHVA/19-20/VDR/188	REV- 0
ALL DIMENSION ARE IN mm				SCALE: NTS	WT: SHEET: