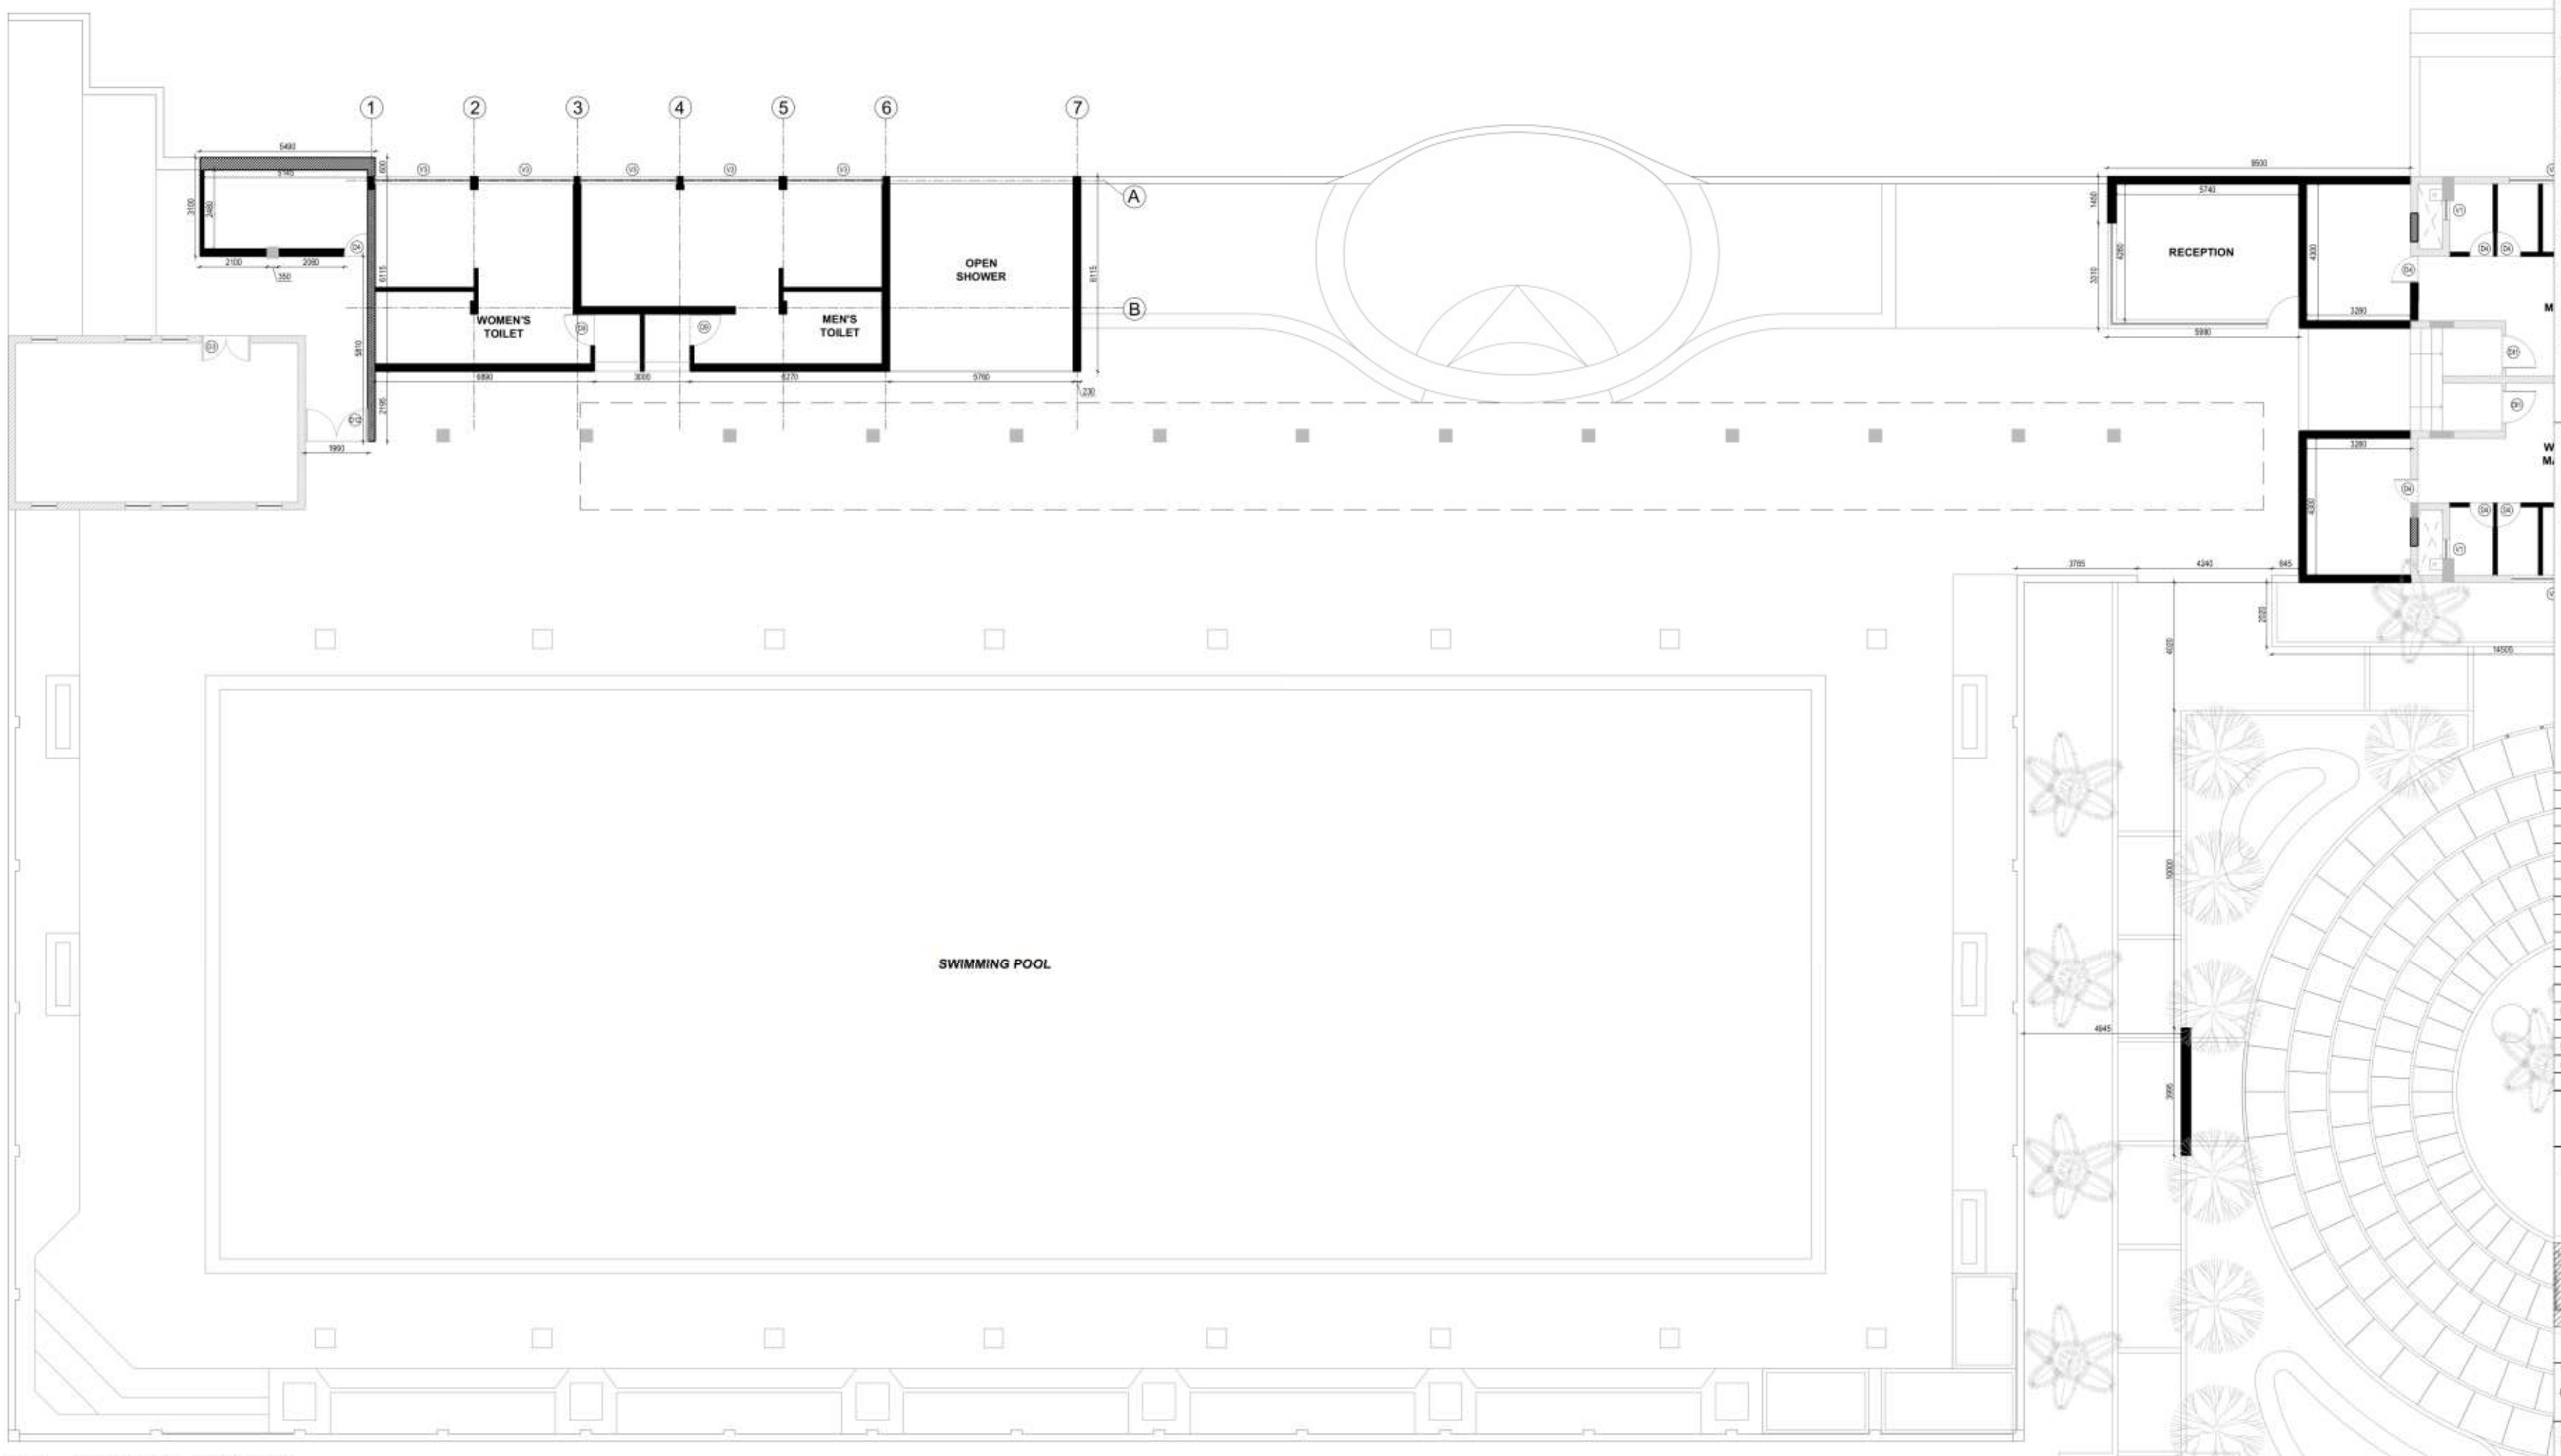

GROUND FLOOR PLAN

1:100

DOOR, VENTILATION & WINDOW SCHEDULE						FRAME		DOOR		LOUVERS		WINDOW
TYPE	TYPE	SIZE	SILL LEVEL FROM FFL	LINTEL FROM FFL	NOS	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL	FINISH	MATERIAL
D1	DOUBLE DOOR	2400X2400	-	2400	8	HARDWOOD	POLISH	HARDWOOD	POLISH	-	-	-
D2	DOUBLE DOOR	1500x2400	-	2400	1	SEASONED WOOD	POLISH	SEASONED WOOD	POLISH	-	-	-
D3	DOUBLE DOOR	1525X2400	-	2400	1	SEASONED WOOD	POLISH	SEASONED WOOD	POLISH	-	-	-
D4	FLUSH DOOR	750X2400	-	2400	35	SEASONED WOOD	POLISH	SEASONED WOOD	POLISH	-	-	-
D5	DOUBLE DOOR	2400X2400	-	2400	2	SEASONED WOOD	POLISH	GLASS		-	-	-
D6	DOUBLE DOOR	1500X2400	-	2400	4	HARDWOOD	POLISH	HARDWOOD	POLISH	-	-	-
D7	FLUSH DOOR	1000X2400	-	2400	7	HARDWOOD	POLISH	HARDWOOD	POLISH	-	-	-
D8	FLUSH DOOR	1135X2400	-	2400	2	SEASONED WOOD	POLISH	SEASONED WOOD	POLISH	-	-	-
D9	FLUSH DOOR	1000X2400	-	2400	10	SEASONED WOOD	POLISH	SEASONED WOOD	POLISH	-	-	-
D10	FLUSH DOOR	750X2400	-	2400	2	HARDWOOD	POLISH	HARDWOOD	POLISH	-	-	-
D11	FLUSH DOOR	1000X2400	-	2400	4	ALUMINIUM	ANODIZED	GLASS	-	-	-	-
D12	DOUBLE DOOR GATE	1960X1200	-	-	1	SEASONED WOOD	POLISH	SEASONED WOOD	POLISH	-	-	-
D13	FLUSH DOOR	1200X2400	-	2400	3	HARDWOOD	POLISH	HARDWOOD	POLISH	-	-	-
D14	DOUBLE DOOR	1800X2400	-	2400	6	HARDWOOD	POLISH	HARDWOOD	POLISH	-	-	-
V1	VENTILATION	600X1000	2700	BEAM BOTTOM	23	ALUMINIUM	ANODIZED	-	-	GLASS	FROSTED	-
V2	VENTILATION	800X1000	2700	BEAM BOTTOM	15	ALUMINIUM	ANODIZED	-	-	GLASS	FROSTED	-
V3	VENTILATION	2400X1000	2700	BEAM BOTTOM	8	ALUMINIUM	ANODIZED	-	-	GLASS	FROSTED	-
V4	VENTILATION	1000X1000	2700	BEAM BOTTOM	1	ALUMINIUM	ANODIZED	-	-	GLASS	FROSTED	-
V5	VENTILATION	590X1000	2700	BEAM BOTTOM	1	ALUMINIUM	ANODIZED	-	-	GLASS	FROSTED	-
V6	VENTILATION	3000X600	1950	BEAM BOTTOM	4	ALUMINIUM	ANODIZED	-	-	GLASS	FROSTED	-
W1	WINDOW	1950X1950	450	2400	4	ALUMINIUM	ANODIZED	-	-	-	-	GLASS
W2	WINDOW	1500X1500	900	2400	2	ALUMINIUM	ANODIZED	-	-	-	-	GLASS
G1	FIXED GLAZING	1800X3400	300	BEAM BOTTOM	1	ALUMINIUM	ANODIZED	-	-	-	-	GLASS
G2	FIXED GLAZING	4165X3400	300	BEAM BOTTOM	1	ALUMINIUM	ANODIZED	-	-	-	-	GLASS
G3	ROOM PARTITON	6105X3700	FLOOR	BEAM BOTTOM	1	ALUMINIUM	ANODIZED	-	-	-	-	GLASS
G4	ROOM PARTITON	10200X3700	FLOOR	BEAM BOTTOM	1	ALUMINIUM	ANODIZED	-	-	-	-	GLASS
G5	FIXED GLAZING	4150X3250	450	BEAM BOTTOM	5	ALUMINIUM	ANODIZED	-	-	-	-	GLASS
G6	FIXED GLAZING	4025X3700	FLOOR	BEAM BOTTOM	1	ALUMINIUM	ANODIZED	-	-	-	-	GLASS
G7	FIXED/SLIDING WINDOW	2000X1400	1000	2400	1	ALUMINIUM	ANODIZED	-	-	-	-	GLASS
G8	FIXED GLAZING	4150X3400	300	BEAM BOTTOM	17	ALUMINIUM	ANODIZED	-	-	-	-	GLASS
G9	FIXED GLAZING	3750X3400	300	BEAM BOTTOM	1	ALUMINIUM	ANODIZED	-	-	-	-	GLASS
G10	FIXED GLAZING	2515X3400	300	BEAM BOTTOM	2	ALUMINIUM	ANODIZED	-	-	-	-	GLASS
G11	FIXED GLAZING	4300X3400	300	BEAM BOTTOM	2	ALUMINIUM	ANODIZED	-	-	-	-	GLASS
G12	FIXED GLAZING	3230X3400	300	BEAM BOTTOM	1	ALUMINIUM	ANODIZED	-	-	-	-	GLASS
G13	FIXED GLAZING	8650X3400	300	BEAM BOTTOM	1	ALUMINIUM	ANODIZED	-	-	-	-	GLASS
G14	FIXED GLAZING	4150X3700	FLOOR	BEAM BOTTOM	2	ALUMINIUM	ANODIZED	-	-	-	-	GLASS
G15	FIXED/SLIDING WINDOW	4150X3700	FLOOR	BEAM BOTTOM	1	ALUMINIUM	ANODIZED	-	-	-	-	GLASS
G16	FIXED GLAZING	4770X3400	300	BEAM BOTTOM	1	ALUMINIUM	ANODIZED	-	-	-	-	GLASS
G17	FIXED GLAZING	6370X3400	300	BEAM BOTTOM	1	ALUMINIUM	ANODIZED	-	-	-	-	GLASS
G18	FIXED GLAZING	5450X3400	300	BEAM BOTTOM	1	ALUMINIUM	ANODIZED	-	-	-	-	GLASS

IMPORTANT NOTES

1. FOR COMPONENTS OF SWIMMING POOL (CHANGING ROOM AND SHOWER) AND PARTY LAWN (TOILETS, CHANGING ROOM, DISH DISPOSAL ETC.) REFER TO RESPECTIVE ENLARGE DRAWINGS.
2. LANDSCAPE ELEMENTS AND THEIR DETAILS SHALL BE REFEREED FROM LANDSCAPE DRAWINGS.

General Notes

1. DRAWINGS ARE THE COPYRIGHT PROPERTY OF **STUDIO AKKRIT**. THE DRAWINGS AND SPECIFICATIONS FOR THIS PROJECT ARE PROTECTED BY COPYRIGHT AND WILL NOT BE REPRODUCED, USED, OR DISTRIBUTED WITHOUT EXPRESS WRITTEN PERMISSION OF **STUDIO AKKRIT**.
2. THESE DRAWINGS INDICATE IN GENERAL THE PROJECT IN TERMS OF BUILDING DESIGN CONCEPTS,THE DIMENSIONS OF THE BUILDINGS AND THE MAJOR BUILDING DESIGN ELEMENTS. AS INDICATED OR SPECIFIED, THE CONTRACTOR SHALL FINISH ALL ITEMS REQUIRED FOR THE PROPER EXECUTION AND COMPLETION OF THE WORKS. DECISIONS OF STUDIO AKKRIT AS TO THE ITEMS OF WORK INCLUDED WITHIN THE DOCUMENT SHALL BE FINAL AND ON BINDING THE CONTRACTOR.
3. ALL DIMENSIONS ARE IN MILLIMETERS, UNLESS OTHERWISE MENTIONED.
4. DRAWINGS IN NO CASE SHALL BE SCALED AND ONLY WRITTEN DIMENSIONS SHALL BE FOLLOWED. LARGE SCALE DETAILS SHALL TAKE PRECEDENCE OVER SMALL SCALE DRAWINGS.
5. PARTITIONS AND WALLS SHOWN CENTERED ON COLUMN CENTER OR FLUSH-FACED WITH STRUCTURAL COLUMNS ARE NOT DIMENSIONED.
6. CONTRACTOR SHALL INFORM AND OBTAIN PERMISSION IN WRITING FROM STUDIO AKKRIT BEFORE MAKING ANY DEVIATIONS FROM THE DRAWINGS.
7. ITEMS OF WORK REQUIRED ON ONE DRAWING OR IN ONE SECTION OF THE SPECIFICATIONS HAVE THE SAME FORCE AND EFFECT AS IF REQUIRED IN ALL DRAWINGS, OR IN ALL SECTIONS OF THE SPECIFICATIONS.
8. PLINTH LEVELS TO BE DECIDED ON SITE WITH REFERENCE TO LEVELS ON THE SITE IN CONSULTATION WITH BUILDING DESIGN DRAWINGS.
9. RAIN WATER DRAIN PIPES OR SLEEVES THROUGH BEAMS AND CURBING TO BE INSTALLED WHILE CASTING AS PER THE POSITIONS SHOWN.
10. FOR DIMENSIONS, LOCATIONS AND DETAILS OF ALL STRUCTURAL MEMBERS REFER STRUCTURAL DRAWINGS.
11. DIMENSIONS ON ALL ELEVATIONS AND SECTIONS SHOWN ON BUILDING DESIGN DRAWINGS ARE SHOWN AS TOP OF UN-FINISHED FLOOR LEVEL UNLESS OTHERWISE MENTIONED.
12. ALL DRAWINGS SHALL BE READ IN CONJUNCTION WITH ALL OTHER CONSULTANTS' DRAWINGS, TOGETHER WITH THE SPECIFICATIONS. DISCREPANCIES AND / OR AMBIGUITIES, IF ANY, SHALL BE BROUGHT TO THE NOTICE OF STUDIO AKKRIT AND CLARIFICATIONS SHALL BE MADE PRIOR TO EXECUTION. **STUDIO AKKRIT'S** DECISION IN THIS REGARD SHALL BE FINAL AND BINDING.
13. THE CONTRACTOR SHALL COORDINATE ALL MECHANICAL FLOOR AND WALL SLEEVES AND SHAFTS IN CONCRETE SLABS AND WALLS WITH MECHANICAL, PLUMBING, FIRE PROTECTION, ELECTRICAL,STRUCTURAL AND BUILDING DESIGN DRAWINGS.
14. NOTES APPEARING ON VARIOUS DRAWINGS FOR DIFFERENT SYSTEMS AND MATERIAL SHEET SHALL BE REVIEWED AND NOTES ON ANY ONE DRAWING SHALL BE APPLIED TO RELATED DRAWINGS AND DETAILS.

Legend

■	PROPOSED WALL
▨	WALL PUNCTURES TO BE FILLED
▨	EXISITING WALL

Rev	Purpose of Issue	Date	Authorised
R1	LAYOUT PLAN - SWIMMING TOILET SNOOKER ROOM & MASSAGE ROOM	05.06.21	VS
R0	LAYOUT PLAN	03.06.21	VS

GENERAL ARRANGEMENT DRAWING

Key Plan

Project:
GREENS CLUB

Client:
RELIANCE INDUSTRIES LIMITED

Design Consultant:
STUDIO AKKRIT
C-1001, The First, Near Keshavbaug party plot, Satellite, Ahmedabad-380015
Phone: [illegible] email: [illegible]
ARCHITECTURE | INTERIOR | LANDSCAPE | URBAN DESIGN

Structure Consultant:
AMIN ASSOCIATES
A-1708, The Capitol, Science City Road, Sola, Ahmedabad
Phone: [illegible] email: [illegible]

MEP Consultant:
VIDHYUT CONSULTANTS
A/1105, Siddhi Vinayak Towers, SG Highway, Ahmedabad
Phone: [illegible] email: [illegible]

Studio Akkrit Project no:
[illegible]

Parcel Name:

Building Name: GREEN'S CLUB BUILDING

Drawing title:
LAYOUT PLAN - GF
PART 1

Original Scale	Drawn	Checked	Authorised	Size
1:100	DA Date: 05.06.21	DA Date: 05.06.21	DA Date: 05.06.21	A1

Drawing Number	Rev
GC_C_A_201	R1

05 / 06 / 2021 - 6:58:12 PM

A:\202108_Greens Club\03_DESIGN\01_ACAD\00_LAYOUT\GC_C_A_201 - LAYOUT PLAN .DWG; Sat, 5 Jun 2021;

drashti