


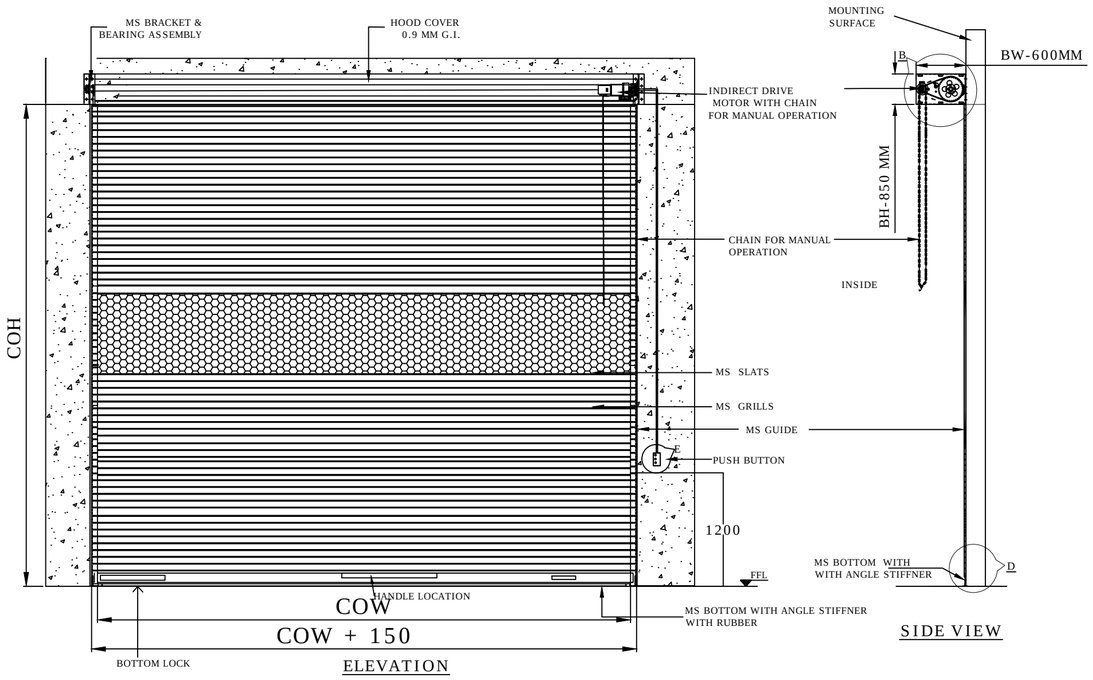


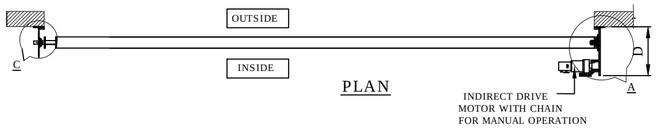


PLAN

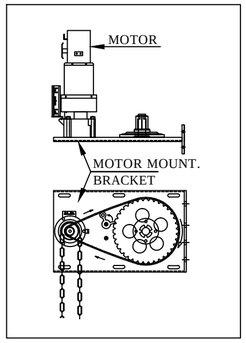


DETAILS : A & B

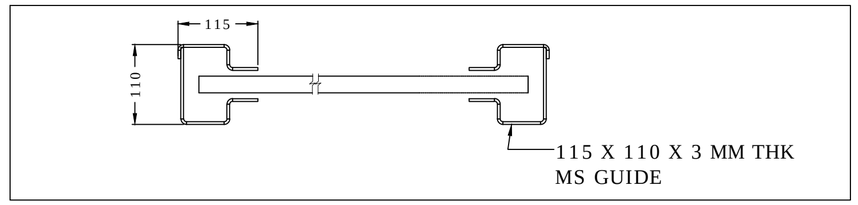

Curve Type
MS 1 MM THK SLAT

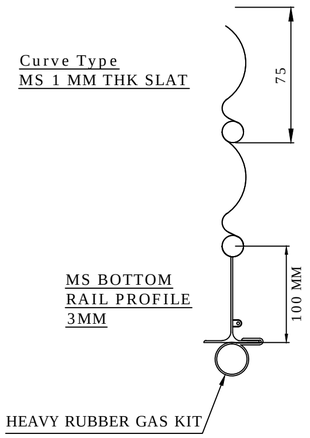

DETAILS : D

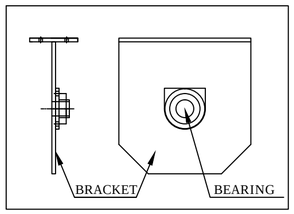

DETAILS : C

NOTES-

1. REFER ABOVE RAL SHADE CHART & CONFIRM RAL SHADE FOR PAINTING .(IF ANY OTHER , KINDLY INFORM TO NIHVA).
2. CONFIRM MOUNTING OF ROLLING SHUTTER IS ON CONCRETE WALL OR STRUCTURE .
3. IF REQUIRED ALL CIVIL WORK , STRUCTURE & ITS FITTING IS IN CLIENT SCOPE .
4. SPACE OF 550 MM IS REQUIRED ABOVE CLEAR OPENING HEIGHT FOR INSTALLATION OF SHUTTER.
5. CLEAR OPENING HEIGHT AFTER SHUTTER INSTALLATION WILL BE 150 MM LESS THAN WALL OPENING HEIGHT .
6. IT IS RECOMMENDED TO FIT THE GRILL IN MIDDLE OF THE SHUTTER TO SUSTAIN THE WIND PRESSURE.
7. MANUAL CHAIN IS ONLY USED FOR EMERGENCY OPERATION.

RAL CODE	SHADE	COLOUR
RAL 9001	CREAM	
RAL 9002	GREY WHITE	
RAL 9010	PURE WHITE	
RAL 5002	ULTRAMARINE BLUE	
RAL 7035	LIGHT GREY	
RAL 7001	SILVER GREY	

SR NO	CLEAR OPENING WIDTH (COW)	CLEAR OPENING HEIGHT (COH)	QUANTITY	RAL COLOR FOR PAINTING
1	4000	4000	2 NOS	SCPECIFIED BY CLIENT

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE

MOTORIZED ROLLING SHUTTER WITH GRILL

	NAME	SIGN	DATE
DRAWN	G.I.P.		18.08.2021
CHECK	A.K.		18.08.2021
APPRD.	V.T.		18.08.2021

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - SCON PROJECTS

PROJECT -

SITE LOCATION - NASHIK

If any queries contact :design@nihva.com

DWG. NO. : NIHVA/21-22/0211

REV- 0

ALL DIMENSION ARE IN mm

SCALE: NTS

WT:

SHEET: