


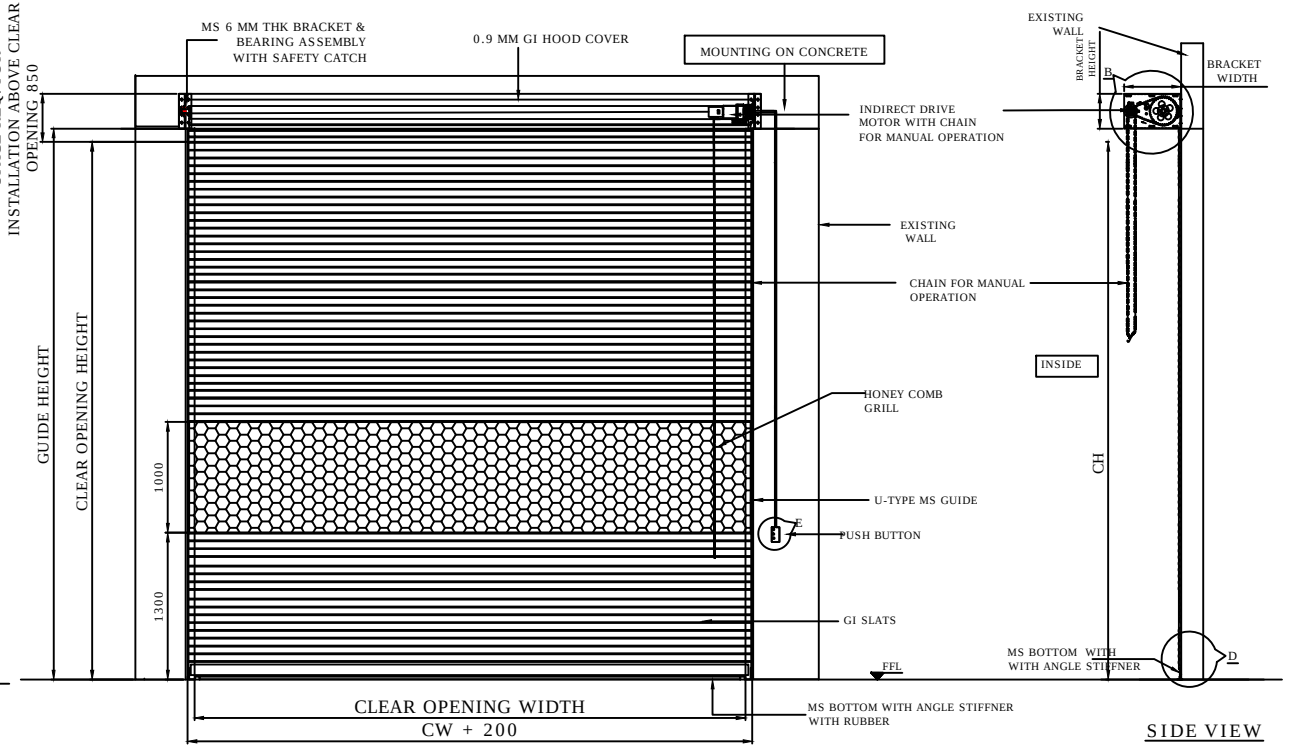


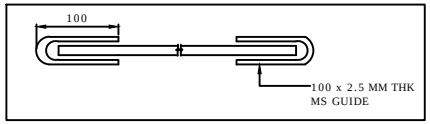


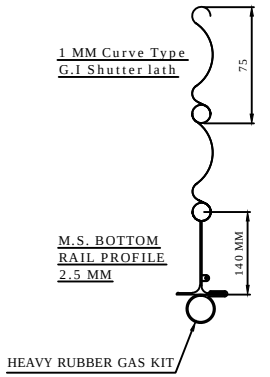


DETAILS : D

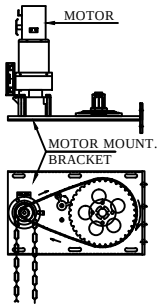

DETAILS : A & B

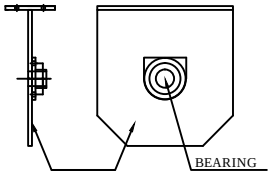

DETAILS : C



DETAILS : E

RAL CODE	SHADE	COLOUR
RAL 9006	WHITE ALUMINIUM	

SR NO	CLEAR OPENING WIDTH(CW)	CLEAR OPENING HEIGHT(CH)	QTY	LOCATION	MOTOR SIDE (RH/LH SEEN FROM INSIDE)	MOUNTING INsIDE/OUTSIDE
6	5310	4020	1	DG1	RH	INSIDE
5	4690	4025	1	DG2	RH	INSIDE
4	2510	3050	1	PUMP ROOM	RH	INSIDE
3	2510	3050	1	BOILER 3	RH	INSIDE
2	3990	3260	1	BOILER 1	RH	INSIDE
1	3990	3260	1	BOILER 2	RH	INSIDE

REV NO	DRAWN	DATE	REMARK
R01	S.M.S.	24.12.2020	ACTUAL DIMENSIONS ADDED

NOTES-
(1) THIS DRAWING IS FOR MOUNTING OF ROLLING SHUTTERS ON CONCRETE.
(2) ALL CIVIL WORK AT SITE IS IN CLIENT SCOPE.

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE- GI SLAT MOTORIZED ROLLING SHUTTER

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

	NAME	SIGN	DATE
DRAWN	SIDDHESHWAR		28.12.2020
CHECK	A.K.		28.12.2020
APPRD.			

CLIENT - LUPIN LIMITED
PROJECT - LUPIN LIMITED
SITE LOCATION - PUNE

If any queries contact : projectsupport@nihva.com
DWG. NO. : NIHVA/20-21/0116/R01
REV- R01
ALL DIMENSION ARE IN mm
SCALE: NTS
WT:
SHEET: