


DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUMPER SIZE
	2080	2630	480	400	330X250X100


PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2130	2730	485	

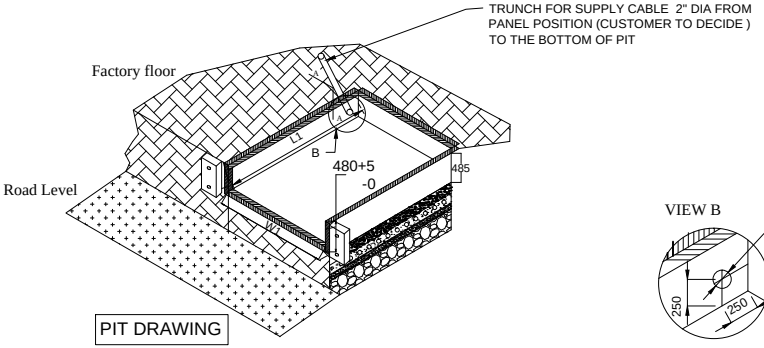


PIT DRAWING





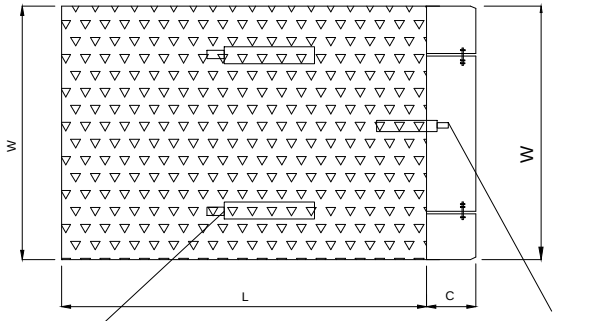

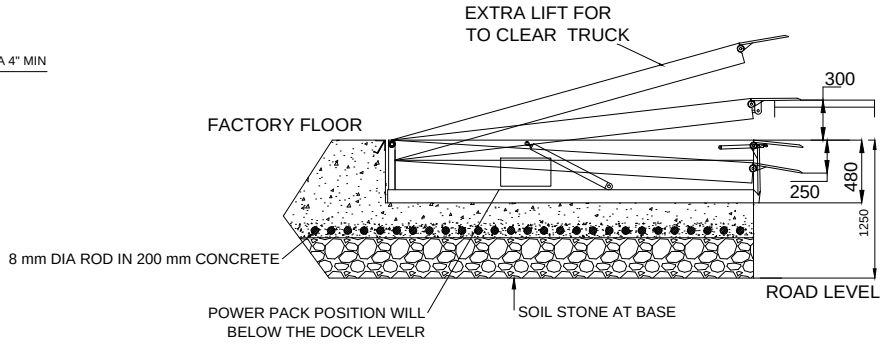

NOTE: -
1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 7000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KG FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUFFERS SHOULD BE MADE AS PER BUFFER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE ± 15 MM

DOCK LEVELER- 09 TON CAPACITY -

DIMENSION :

CLEAR WIDTH	CLEAR HEIGHT	QUANTITY

MATERIAL :

THICKNESS :

NIHVA TECHNOLOGIES PVT. LTD.

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Email:- info@nihva.com
Website:- www.nihva.com

TITLE:

DOCK LEVELER

CLIENT'S APPROVAL :

CLIENT - CNH

PROJECT -

SITE LOCATION - CHAKAN,PUNE

DWG. NO. : NIHVA/16-17/130

SCALE: NTS	WT:	SHEET:1 OF 1

DRAWN BY: OMKAR	DATE: 25-01-2017
CHECK : SAGAR	DATE: 25-01-2017
APPROVED : R.K.	DATE: 25-01-2017

If any queries contact : projects@nihva.com

NOTE: ALL DIMENSION ARE IN mm

THIS DRAWING & DESIGNING IS THE PROPERTY OF NIHVA TECHNOLOGIES. NOT BE SOLD OR COPY TO ANY OTHER CONCERN.