NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

| | |
|---|---|
| Uniclass L7315 | EPIC J3413 |
| CI/SfB (52.5) | |

# ACO Water Management:
## Urban + Landscape

### ACO HexDrain®

- Ideal for domestic and light vehicle traffic applications
- Easy & quick to install
- Unique variable outlet position
- Friction-fit, anti-shunt grating eliminates movement
- Choice of black plastic, metallic effect plastic or galvanised steel gratings
- Typically will drain 180m²
- Easily cut to 500mm lengths
- Full accessory packs aids professional installation
- Fully certified and CE marked to Load Class A 15 BS EN 1433:2002







THE QUEEN'S AWARDS FOR ENTERPRISE: INNOVATION 2006
ACO Technologies plc

*ACO HexDrain®*

## High quality, high strength domestic drainage channel

Manufactured from recycled polypropylene; ACO HexDrain® is suitable for a range of domestic applications, and its range of innovative features makes installing drainage channels easier than ever.

The high quality, high strength channel system is available in light weight 1 metre units, making the ACO HexDrain® quick and easy to install.

A choice of three gratings completes the system; black plastic, metallic effect plastic and galvanised steel, providing a range of application finishes.

A full range of accessories are available designed to aid simple and fast installation. A 15 Pedestrian, cycleways and domestic drives

### Typical applications

- Driveways
- Patios
- Paths
- Pedestrian precincts

ACO

# ACO HexDrain®

## System Overview

Pedestrian, cycleways and domestic drives.


## Features

Outlet connectors plug into the underside of the channel, for simple connection to Ø110mm U-PVC pipe or ACO HexDrain® sump unit

Installation guide clearly marked on the underside of the channel

Choice of eight vertical outlet positions on every channel

Choice of gratings suitable for domestic applications

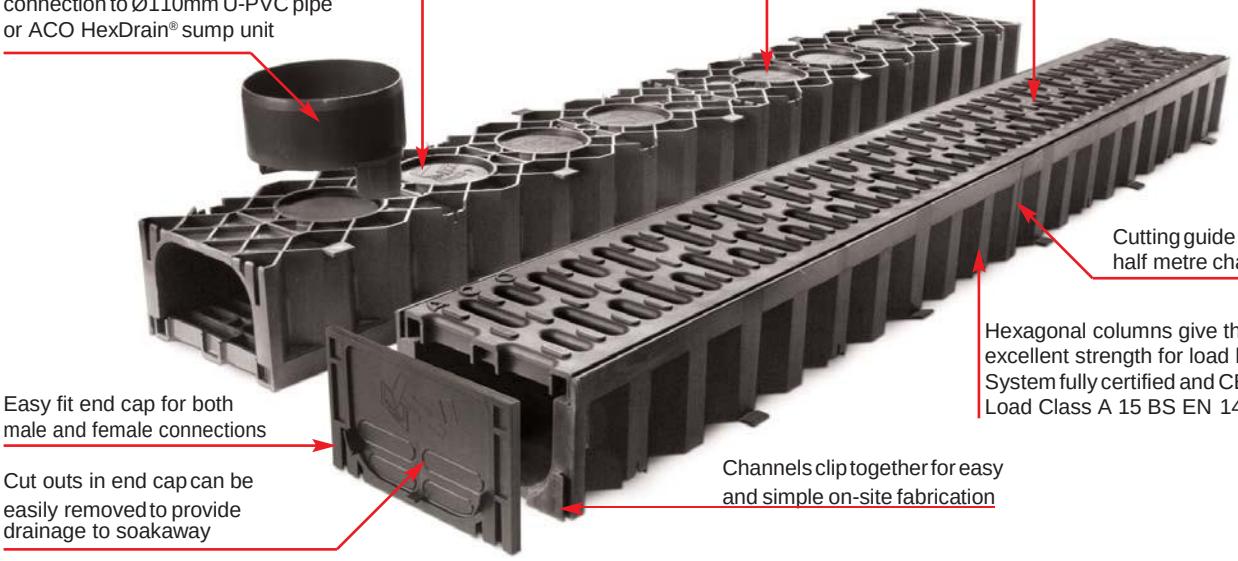

Cutting guide to create half metre channels

Hexagonal columns give the channel excellent strength for load bearing. System fully certified and CE marked to Load Class A 15 BS EN 1433:2002

Easy fit end cap for both male and female connections

Cut outs in end cap can be easily removed to provide drainage to soakaway

Channels clip together for easy and simple on-site fabrication

## ACO HEXDRAIN ACCESSORIES

**ACO HexDrain® corner unit**

**The corner unit allows 4 way channel connection and has a removable spigot for connection to Ø110mm U-PVC pipes.**



Corner unit

**ACO HexDrain® Sump unit**

**The sump unit has a removable spigot for connection to Ø110mm U-PVC pipes.**



Sump unit

**ACO HexDrain® accessory bag consists of:**

**2 x closing end caps**
**1 x vertical outlet Ø110mm**
**1 x leaf guard**
**1 x instruction document**



Outlet connector



End cap



Leaf guard

## ACO HEXDRAIN GRATING OPTIONS



Metallic Effect Plastic



Galvanised Steel

### ACO HexDrain® channel assembly

| Product code | Description | Length (mm) | Width (mm) | Height (mm) | Weight (kg) |
|---|---|---|---|---|---|
| 19310 | Channel with black plastic grating 1m | 1000 | 125 | 80 | 1.4 |
| 19313 | Channel with galvanised steel grating 1m | 1000 | 125 | 80 | 1.9 |

### ACO HexDrain® options and accessories

| Product code | Description | Length (mm) | Width (mm) | Height (mm) | Weight (kg) |
|---|---|---|---|---|---|
| 19352 | 'Metallic effect' plastic grating | 1000 | 118 | 15 | 0.8 |
| 19353 | Galvanised steel grating | 1000 | 118 | 15 | 1.2 |
| 19559 | Corner unit with black plastic grating with vertical outlet | 125 | 125 | 125 | 0.2 |
| 19296 | Corner unit with 'metallic effect' plastic grating | 125 | 125 | 80 | 0.2 |
| 19558 | Black plastic sump unit | 174 | Ø118 | 250 | 0.3 |
| 19287 | Accessory bag | - | - | - | 0.2 |

## ACO HEXDRAIN INSTALLATION



**Dig trench 175mm wide by 130mm deep for channel (400mm deep for sump). Mark finishing height with fixed line 3mm below final surface. Lay 50mm (min.) bed of concrete.**



**If using sump unit as outlet cut off outlet spigot, position sump in concrete bed and fit U-PVC Ø110mm pipework connection to drainage.**



**Knock out preformed base of corner unit and remove appropriate cut out for channel connection. Connect corner unit to sump. Check line and level of corner unit and back fill with concrete.**



**Lay channels from outlet corner unit ensuring joints clip together. Fit endcaps. With gratings fitted haunch around channels with concrete or suitable fill material. Final surface to be 3-5mm above grating.**