


DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUMPER SIZE (OPTIONAL)
	2030	2720	480	400	200X300X100


PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2080	2770	485	

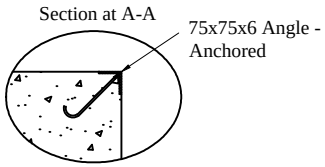


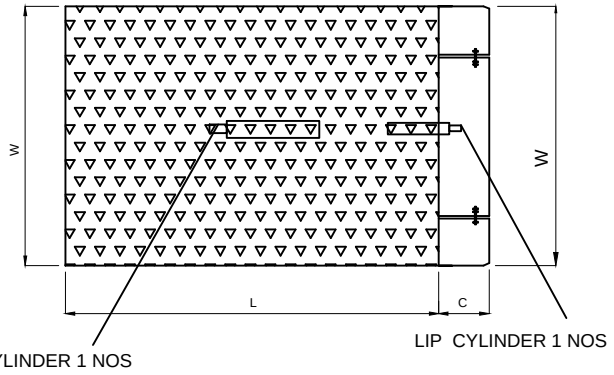

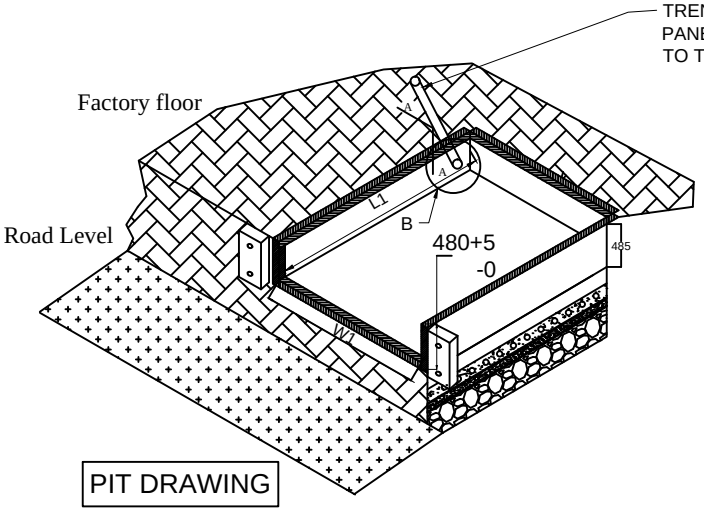

PIT DRAWING



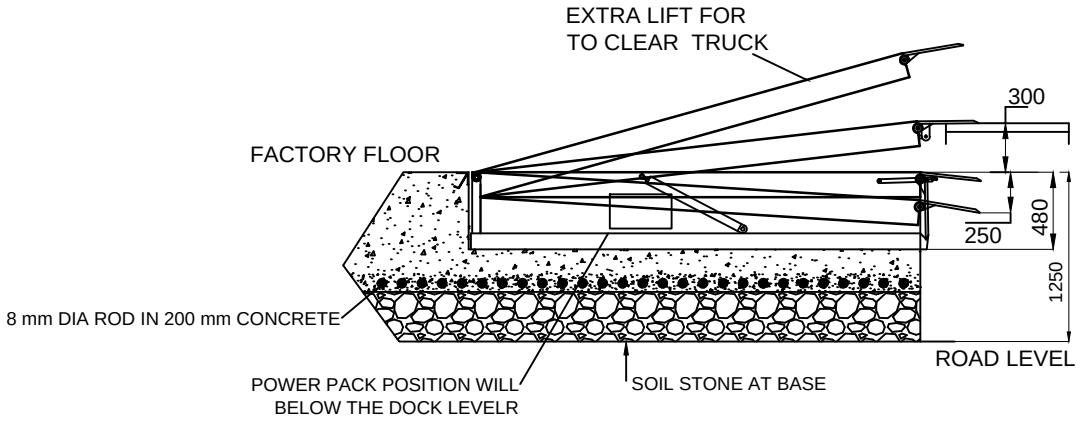

DOCK LEVELER- 6 TON CAPACITY QTY-04 NOS.

SIZE:

WIDTH	LENGTH	QUANTITY
2030 mm	2720 mm	04 NOS.

CAPACITY : 06 TON

NOTE: -
1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 7000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KG FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUMPERS SHOULD BE MADE AS PER BUMPER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFORM SIZE WILL BE ± 15 MM

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGY PVT. LTD. PUNE
Email:- info@nihva.com
Website:- www.nihva.com

TITLE:

DOCK LEVELER

CLIENT'S APPROVAL :

CLIENT - NATCO PHARMA LIMITED

PROJECT - .

SITE LOCATION - VISAKHAPATNAM,A.P.

DWG. NO. : NIHVA/16-17/0084

SCALE: NTS	WT:	SHEET:1 OF 1

DRAWN BY: OMKAR	DATE: 04-10-2016
CHECK : ANIL	DATE: 04-10-2016

If any queries contact : projects@nihva.com

NOTE: ALL DIMENSION ARE IN mm

THIS DRAWING & DESIGNING IS THE PROPERTY OF NIHVA TECHNOLOGIES. NOT BE SOLD OR COPY TO ANY OTHER CONCERN.