



DWG NO: TCE.10939A-AC-1009-AC-10336


TITLE: GATE DETAILS

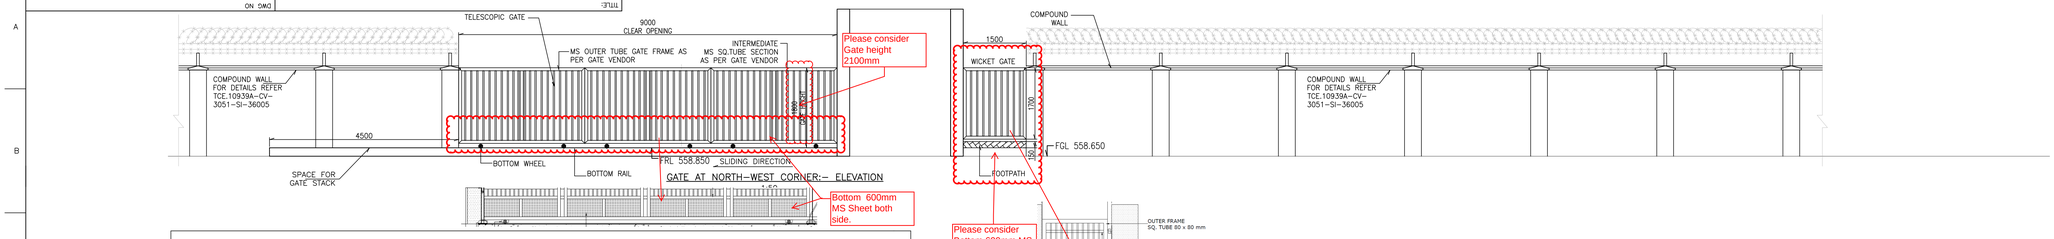




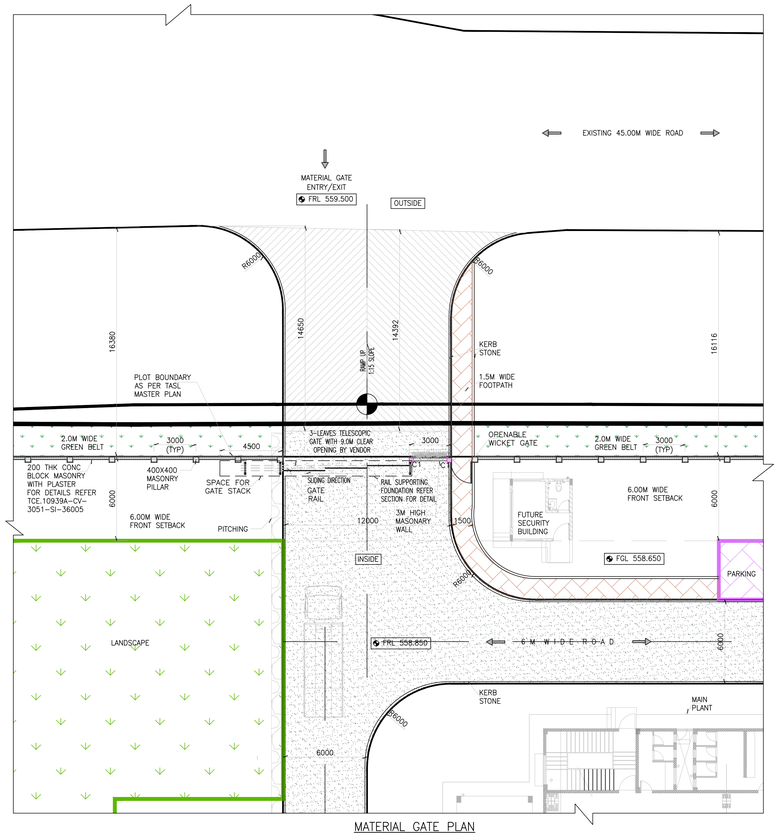

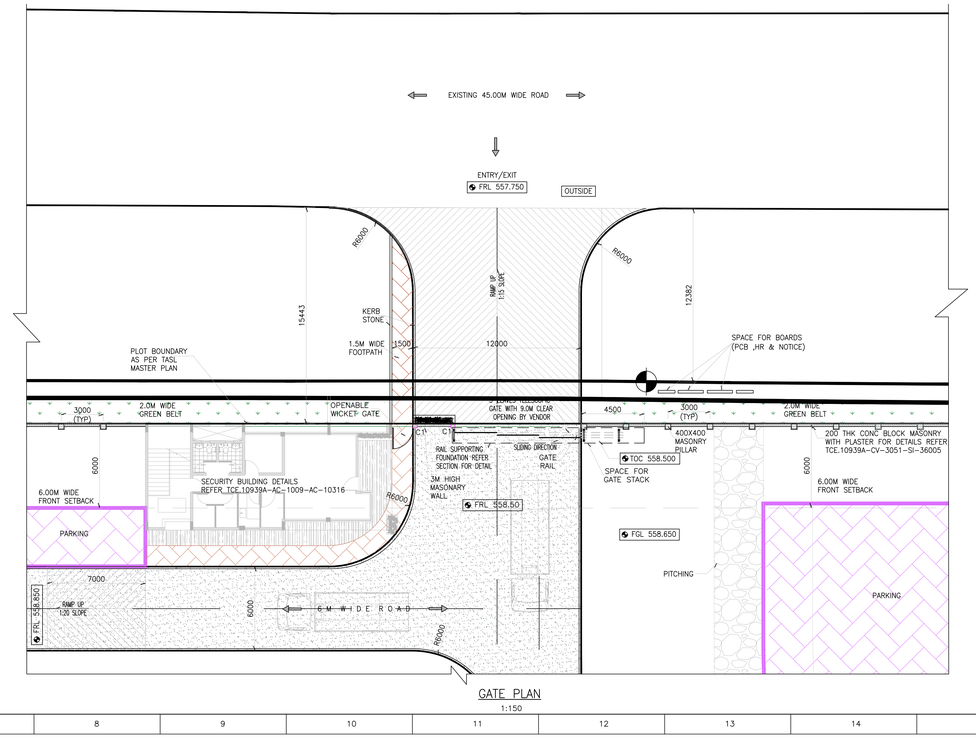

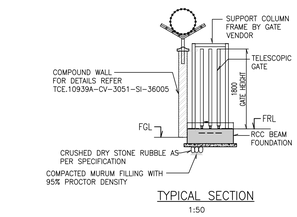

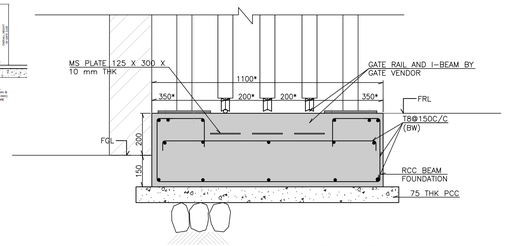


1) AS PER OVERALL LENGTH INSERT 125 X 300 X 10 mm PLATE ON EVERY 1 M IN CONCRETE FOUNDATION
2) THE PLATE SHOULD BE WELDED WITH MS BAR IN RCC BEAM. ISMB WILL BE WELDED WITH MS PLATE.
3) AFTER ALIGNMENT OF BOTTOM RAIL PORE CONCRETE IN REMAINING AREA.

* DIMENSIONS TO BE CONFIRM FROM GATE VENDOR

SCHEDULE FOR COLUMNS AT GATES

C1: (+) 3.00 ABOVE FFL OF SECURITY CABIN		
TO		LINKS
		T8@200c/c
FOUNDATION TOP MIN, 1M BELOW FGL		300 x 300 •T12
		8-T12
FOOTING	SHORT DIR	T10@200c/c
	LONG DIR	T10@200c/c
	D	300
	SIZE	1500 x 1500
COLUMN NO		C1

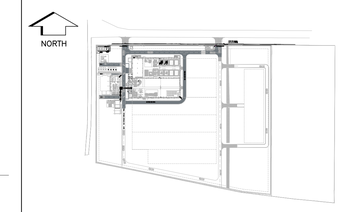

KEY PLAN
NTS

LEGEND

FGL --- FINISH GROUND LEVEL
FRL --- FINISH ROAD LEVEL
FFL --- FINISHED FLOOR LEVEL
STP --- SEWERAGE TREATMENT PLANT
--- OPEN SPACE
--- GREEN BELT
--- PARKING AREA
--- PLOT BOUNDRY – THICK BLACK

NOTES

1. ALL DIMENSIONS ARE IN MILLIMETERS AND LEVELS & CO-ORDINATES ARE IN METERS UNLESS NOTED OTHERWISE.
2. ALL DIMENSIONS AND LEVELS SHALL BE CHECKED AND VERIFIED BEFORE EXECUTING THE WORK.
3. IF IN DOUBT ASK, DO NOT SCALE THE DRAWING.
4. REFER RELEVANT ARCHITECTURAL DRAWINGS FOR DETAILS.
5. REFER DETAIL SPECIFICATIONS BEFORE EXECUTION OF ANY ITEM
6. CONTOURS & NORTH SHOWN HERE ARE INDICATIVE ONLY CONTRACTOR SHALL CARRYOUT JOINT MEASUREMENTS SURVEY FOR LEVELS & NORTH BEFORE START OF ANY WORK.
7. COORDINATES SHOWN IN THE DRAWINGS ARE EXACT INTERSECTIONS OF CENTER LINES
8. THE PLAN IS BASED ON CRITICAL BOUNDARY LINE RECEIVED FROM CLIENT

ENGINEERING REFERENCE

1. TCE.10939A-AC-1000-MP-10200 (P0)---- MASTER PLAN

CONSTRUCTION REFERENCE

1. TCE.10939A-CV-3019-IP-36735 --- CO-ORDINATED PLOT PLAN
2. TCE.10939A-CV-3019-IP-36736 --- ROAD LAYOUT
3. TCE.10939A-CV-3051-SI-36005 --- RC DETAILS OF COMPOUND WALL
4. TCE.10939A-AC-1009-AC-10316 --- SECURITY BUILDING-1 CENTERLINE PLAN,DETAILS & FLOOR PLANS
5. TCE.10939A-AC-1009-AC-10317 --- SECURITY BUILDING-1 SECTIONS, ELEVATIONS & TOILET DETAILS
6. TCE.10939A-CV-3031-SI-36743 --- DETAILS OF CULVERT

HOLD

---NIL---

	SIGN.														
	INITIALS														
	REVISIONS														
	SIGN.														
	INITIALS														
	REVISIONS														
	SIGN.														
	INITIALS														
	REVISIONS														
	SIGN.														
	INITIALS														
	REVISIONS														
	SIGN.														
	INITIALS														
	REVISIONS														
	SIGN.														
R0	INITIALS	SPP	RBV	RNS	RBV							KN	MSD		14-11-2018
ISSUE		DRN	DSN	CHD	CV	EL	IC	ME				PE/PM	APPD	DATE	
					CLEARED										

TATA ADVANCED SYSTEMS LIMITED

PROPOSED TASL UNIT-02 MANUFACTURING FACILITY AT HYDRABAD

GATE DETAILS

TATA CONSULTING ENGINEERS LIMITED
MUMBAI

SCALE	: AS NOTED	DWG NO	ISSUE
DC & DISC: PUN-AC		TCE.10939A-AC-1009-AC-10336	R0

TCE FORM NO. 090 R0

DO NOT SCALE

'R' (PRELIMINARY) ISSUES ARE NOT TO BE USED FOR CONSTRUCTION / FABRICATION BUT ARE ISSUED FOR LIMITED PURPOSES ONLY AS INDICATED IN THE SMALL BLOCK ABOVE THIS BLOCK.

CONSTRUCTION / FABRICATION WORK IS PERMITTED ON 'R' (RELEASED) ISSUES ONLY.

INFORMATION CONTAINED WITHIN 'HOLD' IS NOT RELEASED FOR CONSTUCTION / FABRICATION. FIELD MUST GET DESIGN OFFICE TO CLEAR 'HOLDS' IN TIME BEFORE PROCEEDING WITH ANY CONSTRUCTION / FABRICATION WORK RELATED TO 'HOLDS'.

Proprietary rights of the information contained herein belong to TCE. This information is intended to be used for the mentioned purpose/project only. In case of misuse of information and any claim arising there of, cost and consequence will be on the party misusing the information.

FILE NAME : 10939A-AC-10336-REV-R0.dwg

FILE NAME: F-090-Rev-R0.dwg