
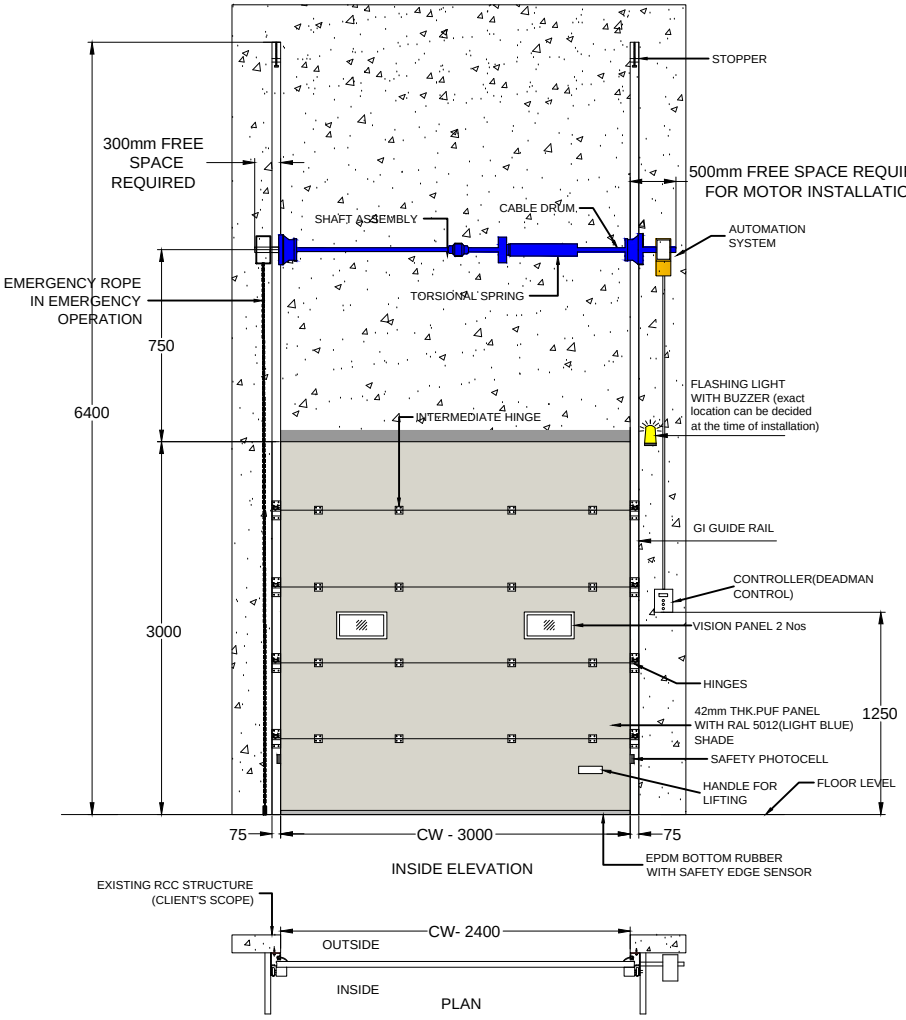


INSIDE ELEVATION


PLAN

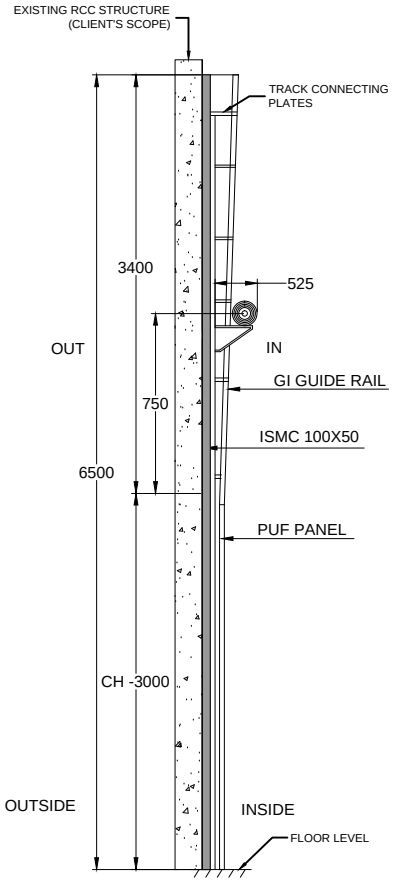

SIDE VIEW

STANDARD COLORS AVAILABLE
FOR THE SECTIONAL DOOR PANELS
1.RAL 9002 - GREY WHITE
2.RAL 7035 - LIGHT GREY
3.RAL 7015 - SLATE GREY
4.RAL 7016 - ANTHRACITE GREY
5.RAL 3002- CARMINE RED
6.RAL 5002- ULTRAMARINE BLUE

Power Supply- Single phase 230 V, 50 Hz
UPS Capacity- 2 KVA/Door

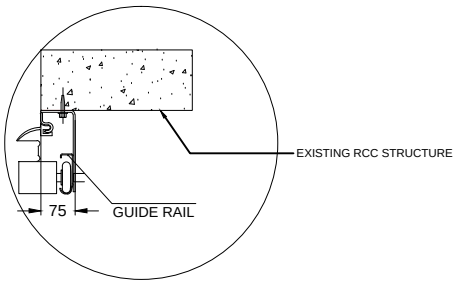

TRACK DETAILS

DIMENSION :

CLEAR WIDTH	CLEAR HEIGHT	QUANTITY
3000 mm	3000 mm	5

TECHNICAL DATA :

COMPONENTS	MATERIALS	SPECIFICATIONS
DOOR PANELS	GI & PUF	42mm CFC- FREE POLYURETHANE WITH 0.5mm THK, GI PRECOATED PANELS.
DOOR HINGE	——	HEAVY DUTY HINGES FOR INTERLOCKING OF PANELS
SHAFT ASSEMBLY	STD.	TORSIONAL SPRING WITH SHAFT & BEARING PLATES
FINISH		PANELS WILL BE COLORED IN STANDARD RAL SHADE APPROVED BY CLIENT.

ACCESSORIES-
1. SAFETY EDGE SENSOR. 2. FLASHING LIGHT BOTH SIDE
3. SAFETY PHOTOCELL 4.MANUAL CHAIN 5.EMERGENCY STOP FROM OUTSIDE 6. SPRING BREAK DEVICE (SPRING FAILURE PROTECTION)
7. TWO WINDOWS 8. ANY POINT STOP (DEADMAN CONTROL)

IMPORTANT NOTES:

1. REQUIRED STRUCTURE FOR DOOR SHALL BE IN CLIENT'S SCOPE.
2.SINGLE PHASE POWER SUPPLY REQUIRED AT DOOR LOCATION.
3.ALL CIVIL WORK SHALL BE CLIENT'S SCOPE.

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Email:- info@nihva.com
Website:- www.nihva.com

TITLE:

SECTIONAL DOOR VL (MOTORIZED)

CLIENT'S APPROVAL :

CLIENT - DEV TECHNOSKILL

PROJECT - AMAR TEA

SITE LOCATION - UMARGAON, GUJARAT

DWG. NO. : NIHVA/17-18/0356 | REV- 0

SCALE: NTS | WT: | SHEET:1 OF 1

DRAWN BY: OMKAR | DATE: 31-08-2017

CHECK BY: SHEKHAR | DATE: 31-08-2017

APPROVED BY : SHEKHAR | DATE: 31-08-2017

If any queries contact : design@nihva.com

NOTE: ALL DIMENSIONS ARE IN mm

THIS DRAWING & DESIGNING IS THE PROPERTY OF NIHVA TECHNOLOGIES. NOT TO BE SOLD OR COPIED TO ANY OTHER CONCERN.