



DOCK LEVELER SIZE	WIDTH (W)	LENGTH (L)	HEIGHT (H)	LIP (C) LENGTH	BUMPER SIZE (OPTIONAL)
	2030	2720	480	400	200X300X100


PIT DIMENSION	WIDTH (W 1)	LENGTH (L 1)	DEPTH (D)	ALL DIMENSIONS ARE IN mm
	2080	2770	485	

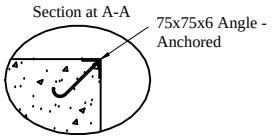

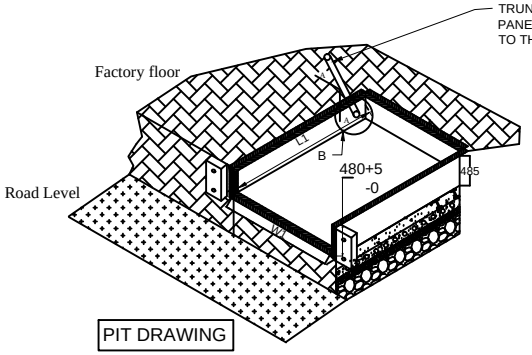



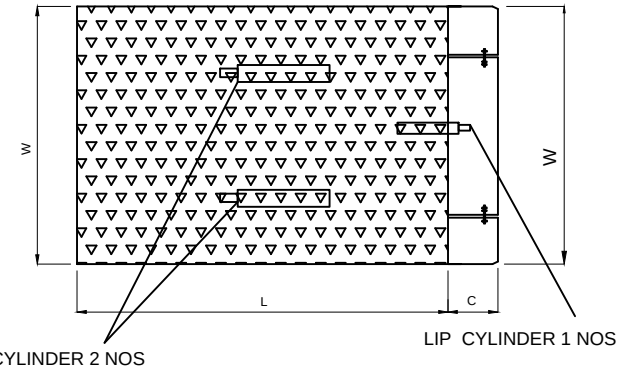

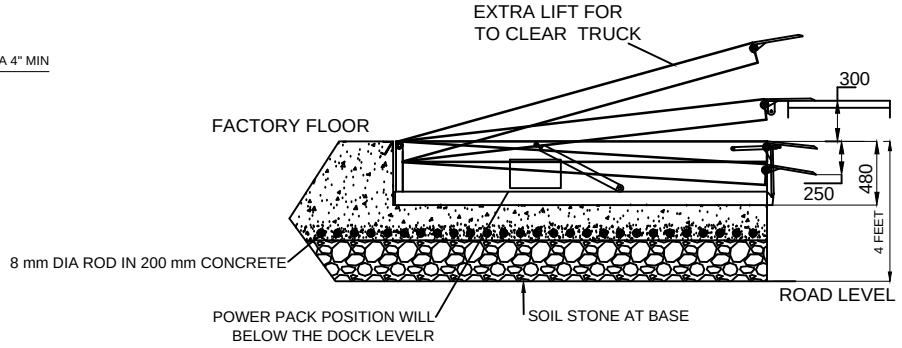

DOCK LEVELER- 09 TON CAPACITY

DIMENSION :

WIDTH	LENGTH	QUANTITY
2030mm	2720 mm	01 NO.

CAPACITY : 09 TON

NOTE: -
1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION (SUPPLY CABLE LENGTH STD. 7000 MM)
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KG FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUMPERS SHOULD BE MADE AS PER BUMPER DRAWING (IF ORDERED)
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE ± 15 MM

NIHVA TECHNOLOGY PVT. LTD. PUNE
Email:- info@nihva.com
Website:- www.nihva.com

TITLE:

DOCK LEVELER

CLIENT'S APPROVAL :

CLIENT - EMERSON, NASHIK

PROJECT -

SITE LOCATION - NASHIK

DWG. NO. : NIHVA/16-17/0051

SCALE: NTS | WT: | SHEET:1 OF 1

DRAWN BY: ANIL KHOT DATE: 01-08-2016

CHECK : ANIL DATE: 01-08-2016

If any queries contact : projects@nihva.com

NOTE: ALL DIMENSION ARE IN mm

THIS DRAWING & DESIGNING IS THE PROPERTY OF NIHVA TECHNOLOGIES. NOT BE SOLD OR COPY TO ANY OTHER CONCERN.