


| DOCK LEVELER SIZE | WIDTH (W) | LENGTH ( L) | HEIGHT (H) | LIP (C) LENGTH | BUFFER SIZE (OPTIONAL) |
|---|---|---|---|---|---|
| | 2080 | 2850 | 480 | 400 | 200X300X100 |


| PIT DIMENSION | WIDTH (W 1) | LENGTH ( L 1) | DEPTH (D) | ALL DIMENSIONS ARE IN mm |
|---|---|---|---|---|
| | 2120 | 2850 | 485 | |

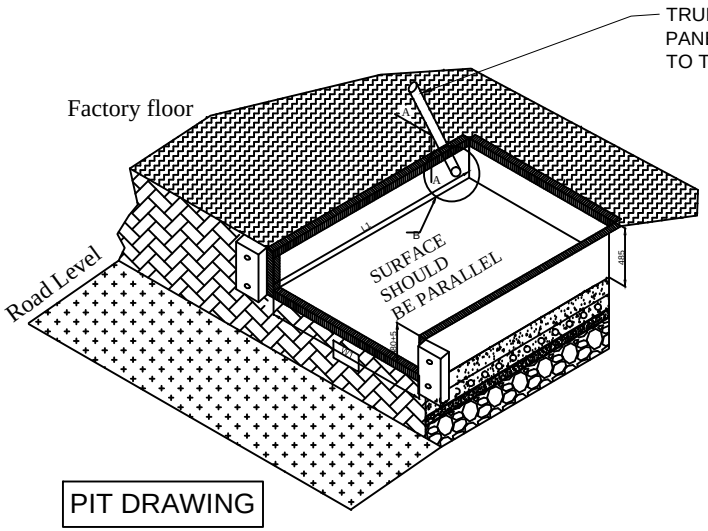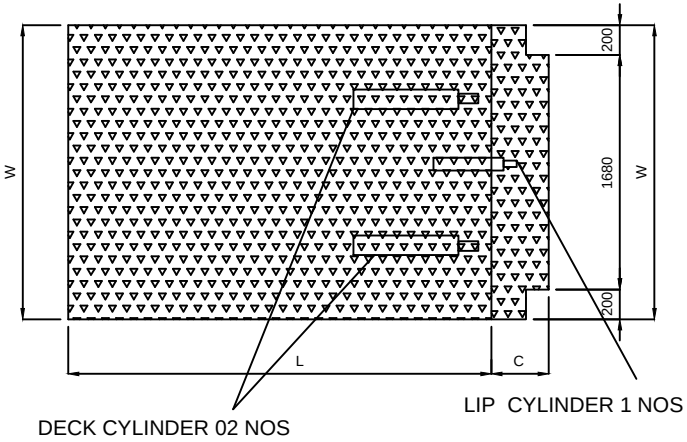



PIT DRAWING

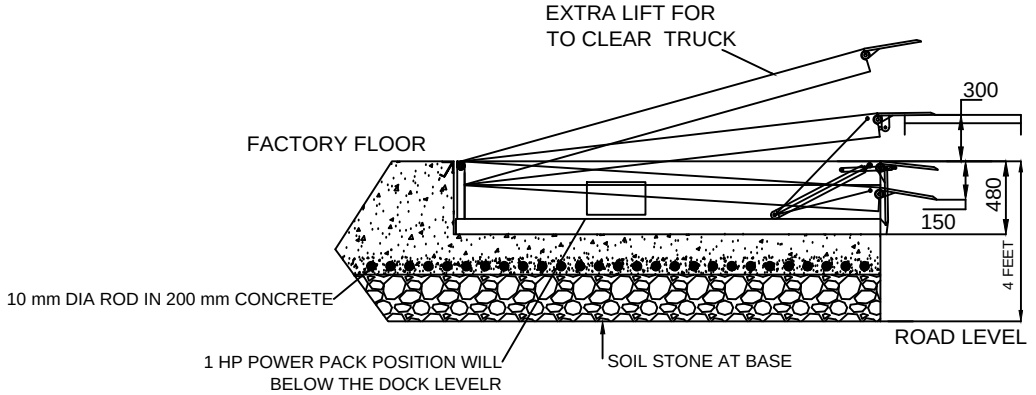


NOTE: -
1. PROPER DRAINAGE SHOULD BE DONE
2. TRENCH AS SHOWN SHOULD BE MADE BY DECIDING THE POWER PACK POSITION ( SUPPLY CABLE LENGTH STD. 7000 MM )
3. LEVEL OF THE PIT SHOULD BE PLAIN AND SHOULD TAKE AT LEAST 12000 KGS FLOOR LOADING
4. MOUNTING ARRANGEMENT FOR BUMPERS SHOULD BE MADE AS PER BUMPER DRAWING ( IF ORDERED )
5. FABRICATION TOLERANCE FOR PLATFROM SIZE WILL BE + 10 MM

# DOCK LEVELER- 10 TON CAPACITY - 06 NOS

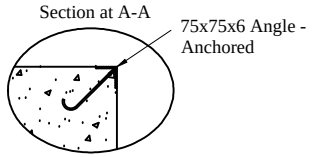IMP NOTE: -
1.PLEASE NOTE THAT THE CAPACITY OF DOCK LEVELER CONSIDERED IS THE CAPACITY AFTER THE LIP IS RESTED ON THE VEHICLE.
2.CYLINDERS PROVIDED ARE INTENDENT TO BE USED ONLY FOR LIFTING OF BARE DOCK & CAN NOT LIFT OTHER LOADS.

TOLERANCE :- ± 10mm

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: DOCK LEVELER - 10 TON

| | NAME | SIGN | DATE |
|---|---|---|---|
| DRAWN | P.V.A | | 28.09.2019 |
| CHECK | G.J | | 28.09.2019 |
| APPRD. | | | |

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD.
Website:- www.nihva.com
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com

CLIENT - TATA CUMMINS LTD
PROJECT -
SITE LOCATION - PUNE
DWG. NO. : NIHVA/19-20/0109
REV- 00
SCALE: NTS
WT:
SHEET: 01 OF 01