
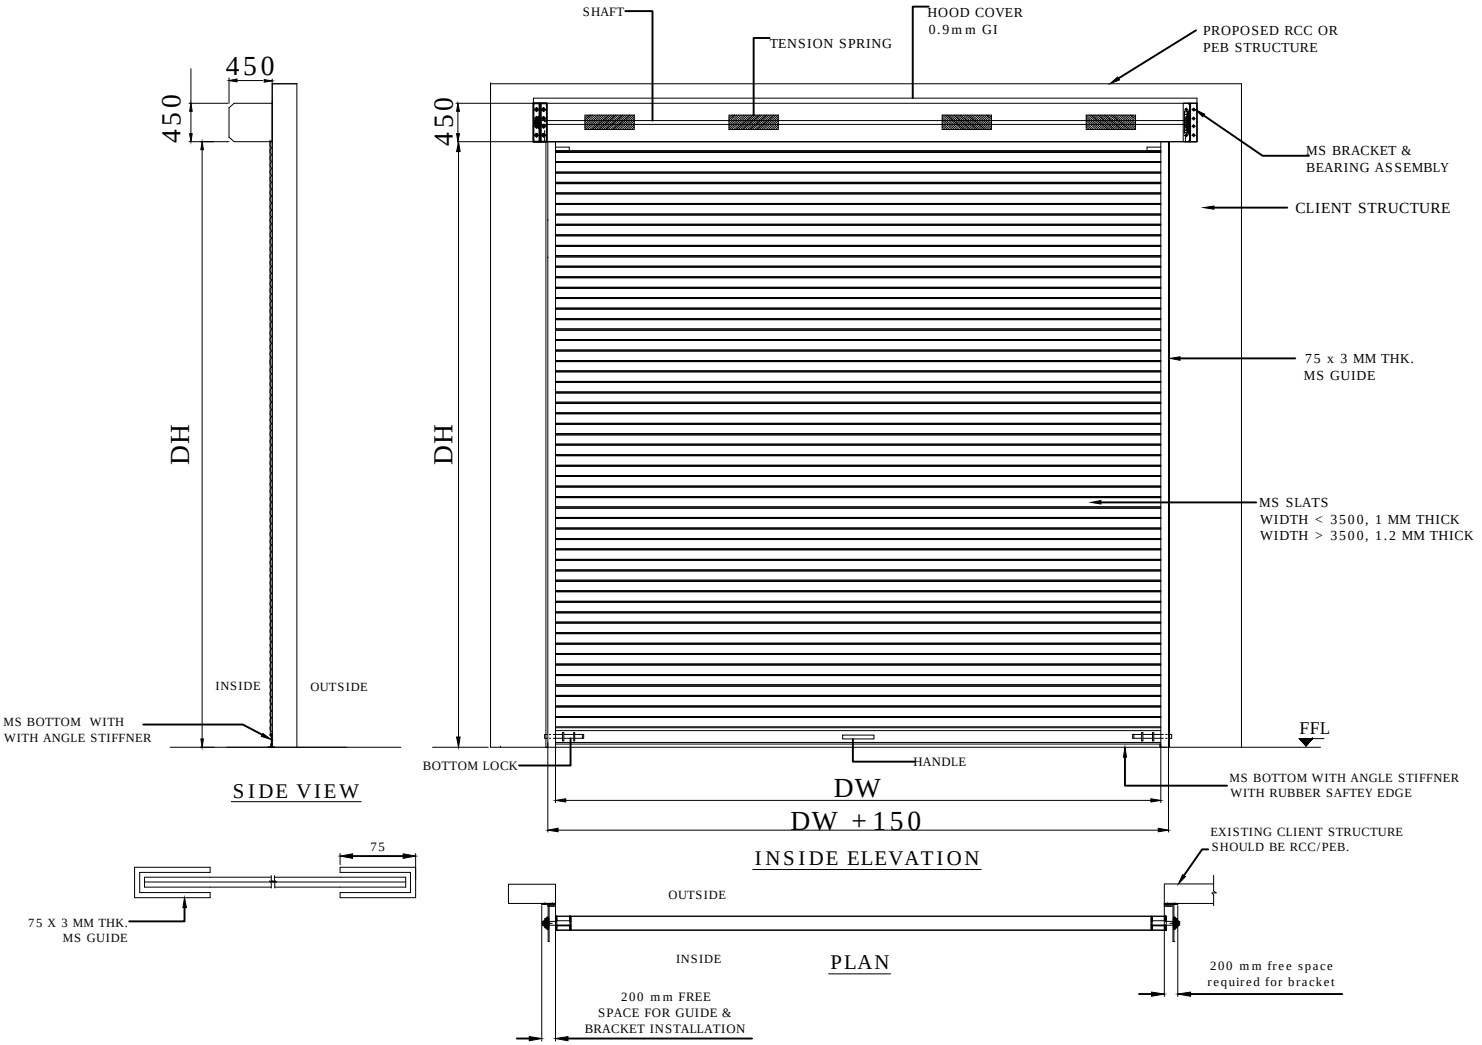


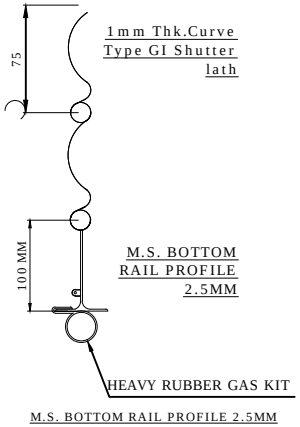

M.S. BOTTOM RAIL PROFILE 2.5MM

RAL CODE	SHADE	COLOUR
RAL 9001	CREAM	
RAL 9002	GREY WHITE	
RAL 9010	PURE WHITE	
RAL 5002	ULTRAMARINE BLUE	
RAL 7035	LIGHT GREY	
RAL 7001	SILVER GREY	

CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QUANTITY
CLEAR OPENING WIDTH (COW)	CLEAR OPENING HEIGHT (COH)	7

NOTES-

1. REFER ABOVE RAL SHADE CHART & CONFIRM RAL SHADE FOR PAINTING . (IF ANY OTHER , KINDLY INFORM TO NIHVA).
2. CONFIRM MOUNTING OF ROLLING SHUTTER IS ON CONCRETE WALL OR STRUCTURE .
3. IF REQUIRED ALL CIVIL WORK , STRUCTURE & ITS FITTING IS IN CLIENT SCOPE .
4. EXTRA SPACE WILL BE REQUIRED ABOVE CLEAR OPENING HEIGHT FOR INSTALLATION OF SHUTTER.(SIZE DEPENDS ON CLEAR OPENING)
5. CLEAR OPENING HEIGHT AFTER SHUTTER INSTALLATION WILL BE 150 MM LESS THAN WALL OPENING HEIGHT .
6. 2 COATS (EACH COAT OF 35 MICRON DFT) OF EPOXY POLYAMIDE-BASED ENAMEL FINISH OF APPROVED COLOUR AND MAKE OVER A COAT (EACH ONE COAT 25 MICRONS DFT) OF EPOXY POLYAMIDE

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: MANUAL ROLLING SHUTTER

	SIGN	DATE
DRAWN	G.P.	30-09-2021
CHECK	A.K.	30-09-2021
APPROVAL	V.T.	30-09-2021
MFG.		

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT -

PROJECT -STANDARD LAYOUT DRAWING

SITE -

DWG. NO. : NIHVA/21-22/0239 | REV-0

SCALE: NTS | WT: | SHEET: 01 OF 01