

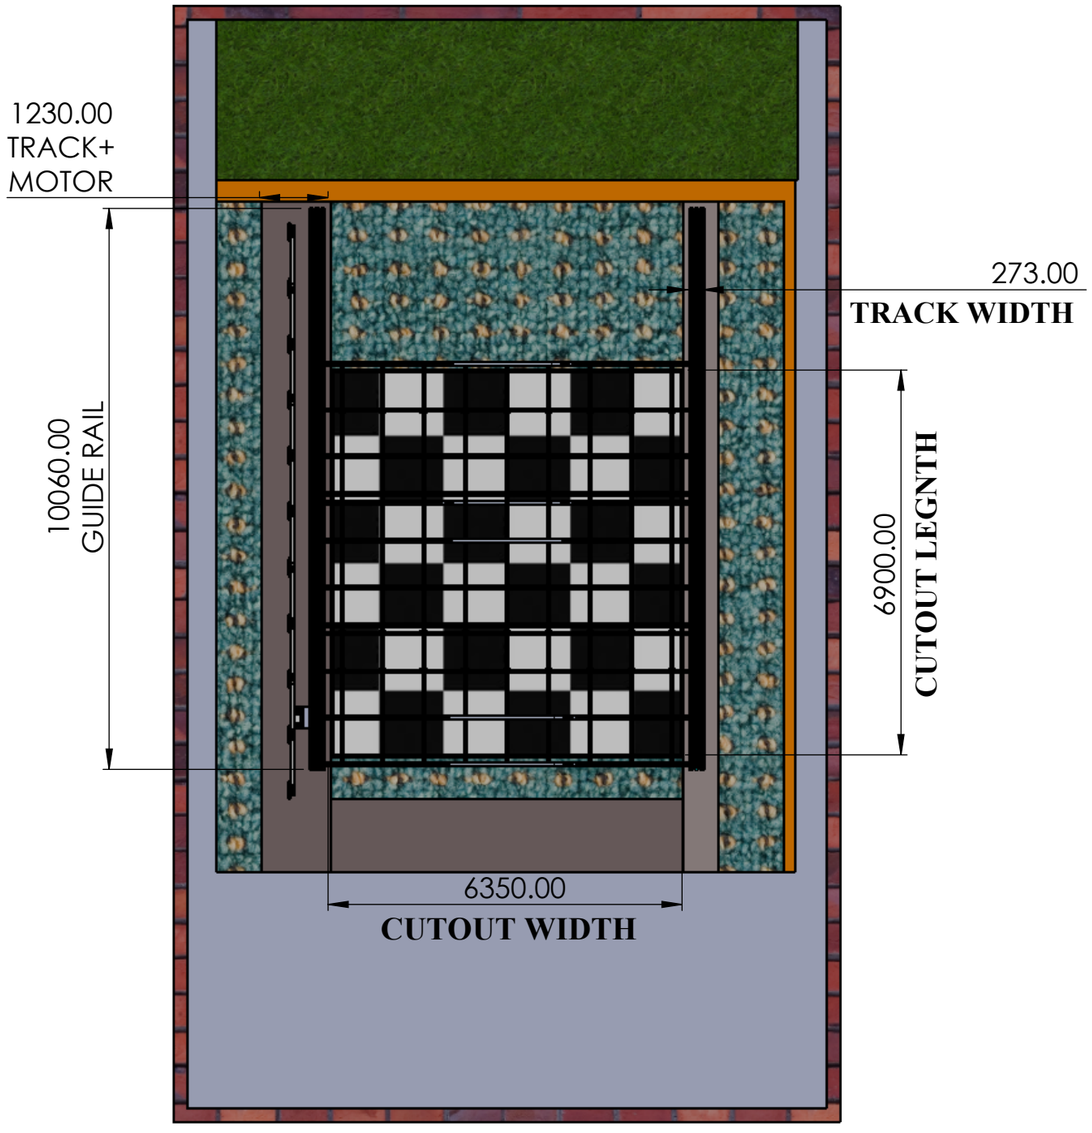



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	2D DRAWING SALAVI MAM CIVIL BASE	CLIENT SCOP	1
2	GUIDE RAILS-T75-1B	STD (10060 MM LENGTH)	6
3	2D DRAWING SALAVI MAM Anchor Bolt M10x75	STD	76
4	2D DRAWING SALAVI MAM PANEL_01 ASM	INHOUSE	1
5	2D DRAWING SALAVI MAM PANEL_02 ASM	INHOUSE	1
6	2D DRAWING SALAVI MAM PANEL_03 ASM	INHOUSE	1
7	2D DRAWING SALAVI MAM NICE MOTOR 1T	STD	1
8	2D DRAWING SALAVI MAM Rack support_575	STD (LOOSE PART)	11
9	2D DRAWING SALAVI MAM RACK	STD (M4 RACK, 30x8x1000 mm, ZINC COATED WITH SPACERS AND SCREWS.)	11
10	2D DRAWING SALAVI MAM BUSBAR FLASHER	STD (LOOSE PART)	5

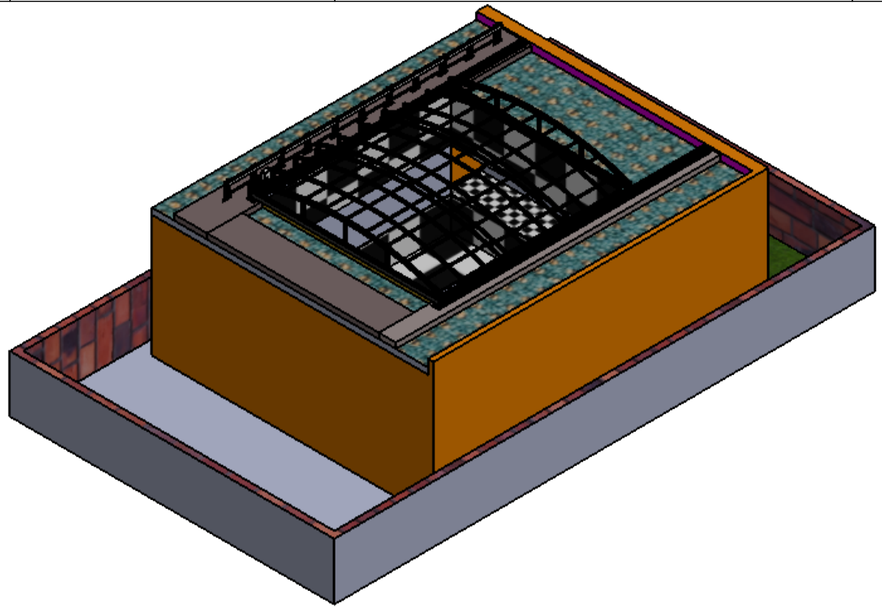


TITLE - RETRACTABLE ROOF				NIHVA TECHNOLOGIES PVT.LTD.PUNE
DWG NO - NTPL-268-PM-001-00-000-000				Website - www.nihva.com
	NAME	SIGNATURE	DATE	PROJECT NO - NTPL-276-PM
DRAWN	V.W		28-03-2025	PRODUCT - RETRACTABLE ROOF
CHK'D	S.W		28-03-2025	SITE LOCATION - GUJARAT
APPV'D	V.T.		28-03-2025	
if any queries contact - supportautomation@nihva.com				REVISION - QTY - 1
ALL DIMENSION ARE IN mm			A3	SCALE - SHEET 1 OF 21

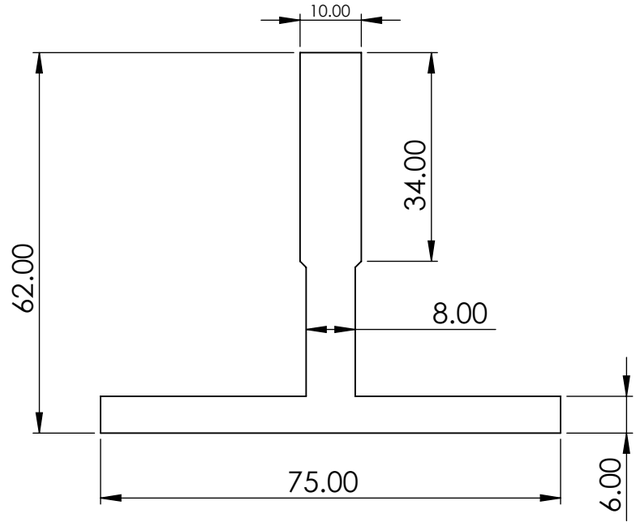

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	GUIDE RAILS-T75-1B	STD (10060 MM LENGTH)	6

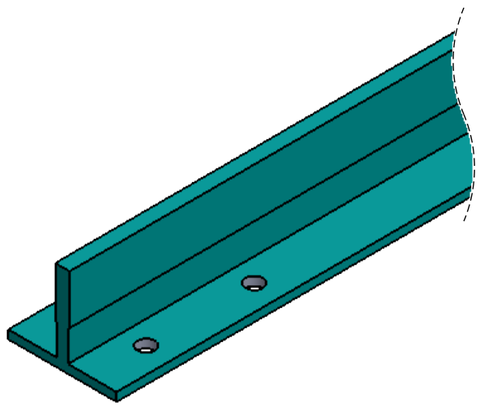


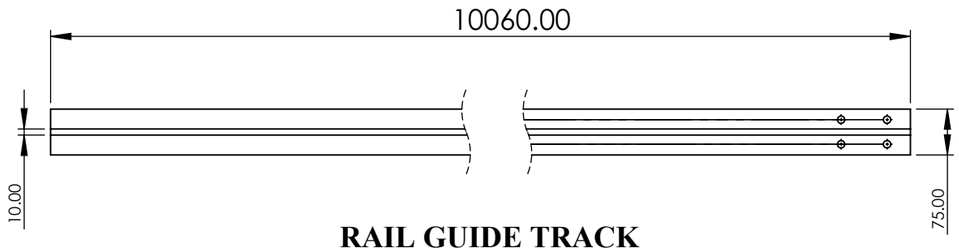


RAIL GUIDE TRACK

TITLE - RETRACTABLE ROOF				NIHVA TECHNOLOGIES PVT.LTD.PUNE
DWG NO - NTPL-276-PM-01-01-000-02				Website - www.nihva.com
	NAME	SIGNATURE	DATE	PROJECT NO - NTPL-276-PM
DRAWN	V.W		28-03-2025	PRODUCT - RETRACTABLE ROOF
CHK'D	S.W		28-03-2025	SITE LOCATION - GUJARAT
APPV'D	V.T.		28-03-2025	
if any queries contact - supportautomation@nihva.com				REVISION - QTY - 6
ALL DIMENSION ARE IN mm		A3		SCALE - SHEET 2 OF 21


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	2D DRAWING SALAVI MAM NTPL-268-PM-PANEL_01	PANEL_01 FRAME	1
2	AL Support tube SQ TUBE 40X40X1.5 MM L-734 MM	AL INTERMEDIAT SUPPORT TUBE	27
3	2D DRAWING SALAVI MAM rivet_iso_15977_4_x_16_0	RIVET M4X16	83
4	T PLATE	JOINING PLATE	4
5	L PALTE	JOINING PLATE	8
6	L ANGLE PLATE	JOINING PLATE	8
7	2D DRAWING SALAVI MAM PROFILE L ANGLE WELDING PLATE	ALUMINIUM JOINING PLATE	4
8	2D DRAWING SALAVI MAM BEARING BLOCK ASM WITH SHOULDER BOLT	SLIDING BLOCK	4
9	2D DRAWING SALAVI MAM ENCLOSURE NTPL-268-PM-PANEL_01	ENCLOSURE _01	1
10	2D DRAWING EPDM RUBBER		1

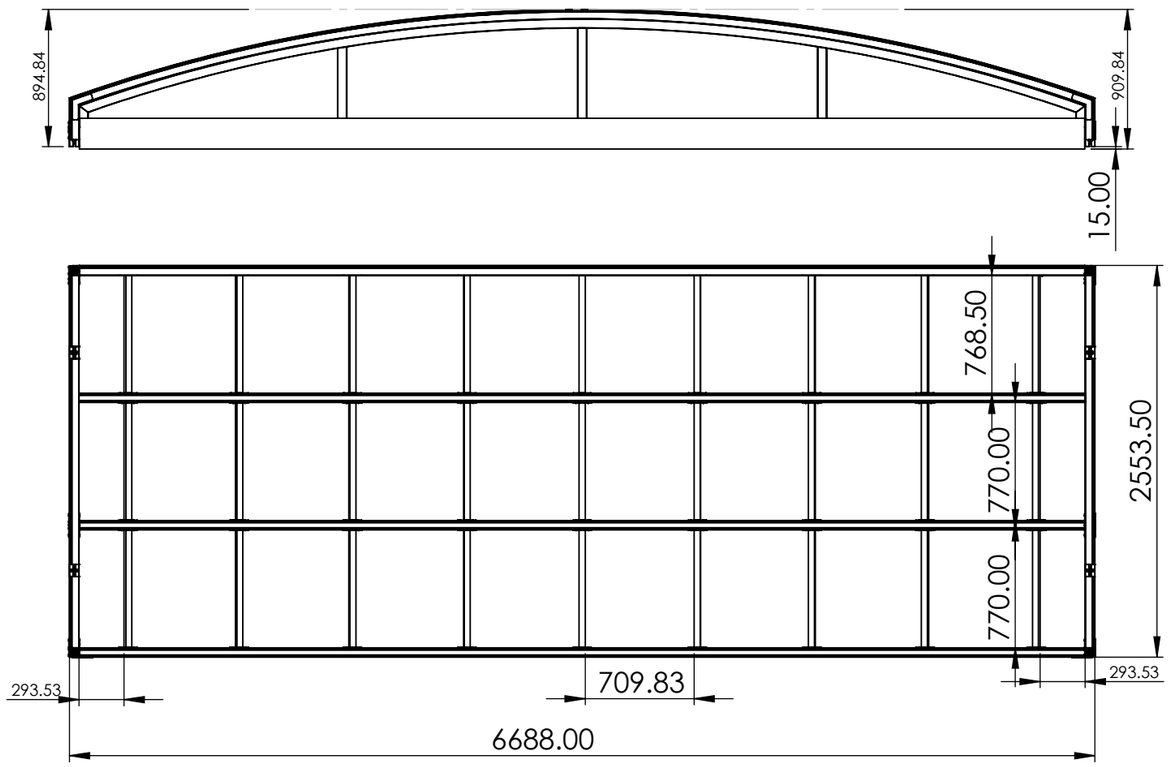


PANEL NO 1

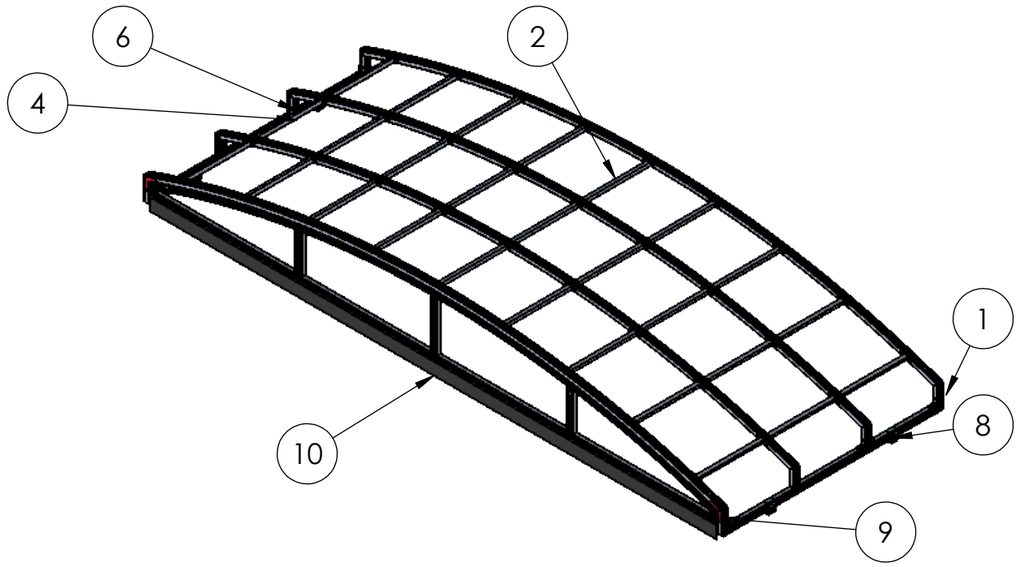



TITLE - RETRACTABLE ROOF				NIHVA TECHNOLOGIES PVT.LTD.PUNE
DWG NO - NTPL-276-PM-01-02-000-04				Website - www.nihva.com
	NAME	SIGNATURE	DATE	PROJECT NO - NTPL-276-PM
DRAWN	V.W		28-03-2025	PRODUCT - RETRACTABLE ROOF
CHK'D	S.W		28-03-2025	SITE LOCATION - GUJARAT
APPV'D	V.T.		28-03-2025	
if any queries contact - supportautomation@nihva.com				REVISION - QTY - 1
ALL DIMENSION ARE IN mm		A3		SCALE - SHEET 3 OF 21

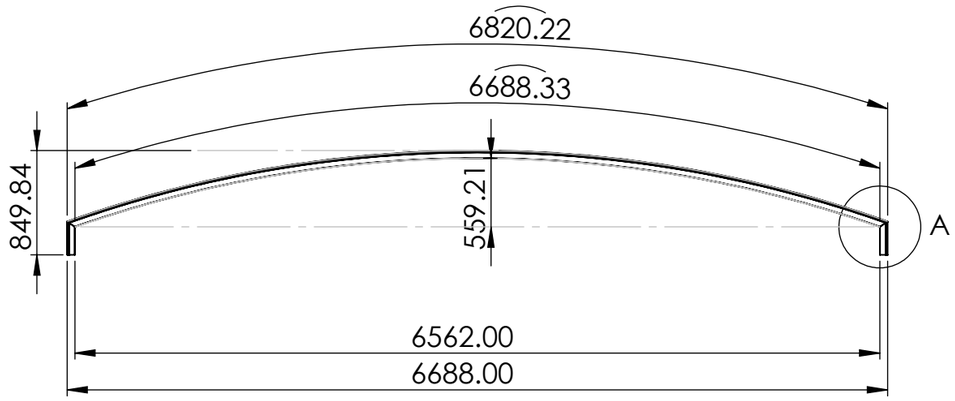

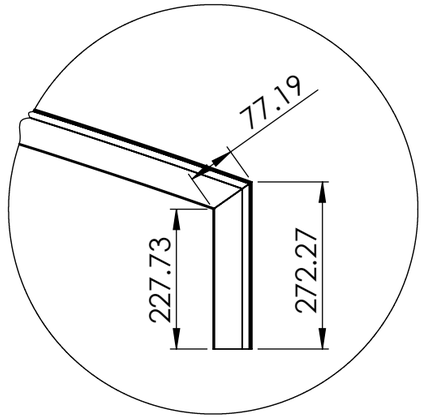


DETAIL A
SCALE 1 : 10

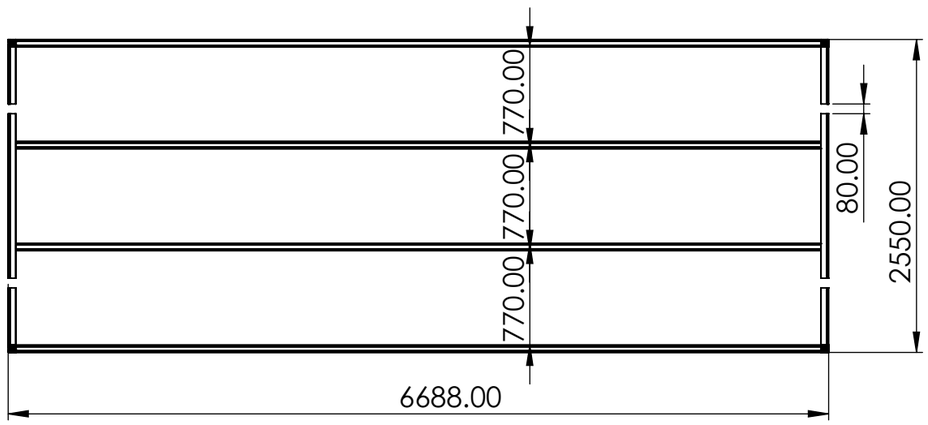


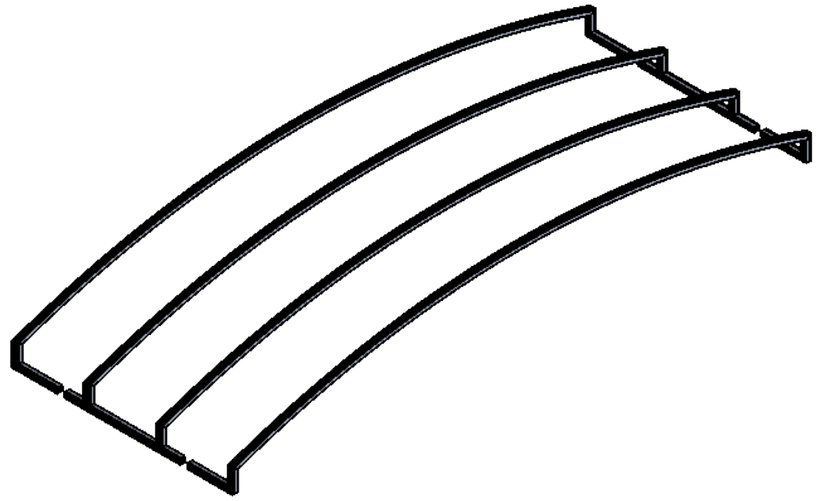


TITLE - RETRACTABLE ROOF				NIHVA TECHNOLOGIES PVT.LTD.PUNE
DWG NO - NTPL-276-PM-001-02-01-000				Website - www.nihva.com
	NAME	SIGNATURE	DATE	PROJECT NO - NTPL-276-PM
DRAWN	V.W		29-03-2025	PRODUCT - RETRACTABLE ROOF
CHK'D	S.W		29-03-2025	SITE LOCATION - GUJARAT
APPV'D	V.T.		29-03-2025	
if any queries contact - supportautomation@nihva.com				REVISION - QTY - 1
ALL DIMENSION ARE IN mm			A3	SCALE - SHEET 4 OF 21

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	AL Support tube SQ TUBE 40X40X1.5 MM L-734 MM	AL INTERMEDIAT SUPPORT TUBE	81

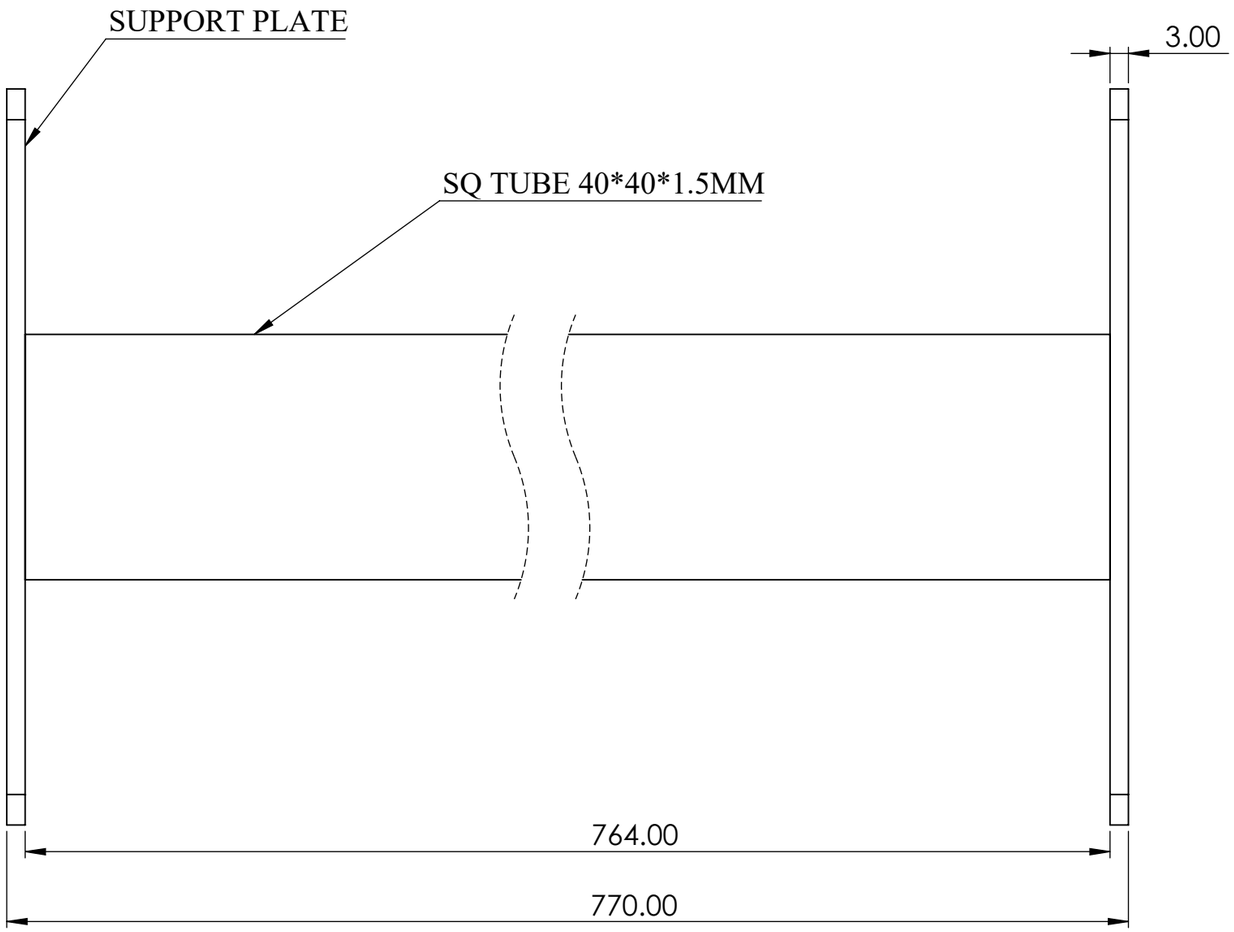


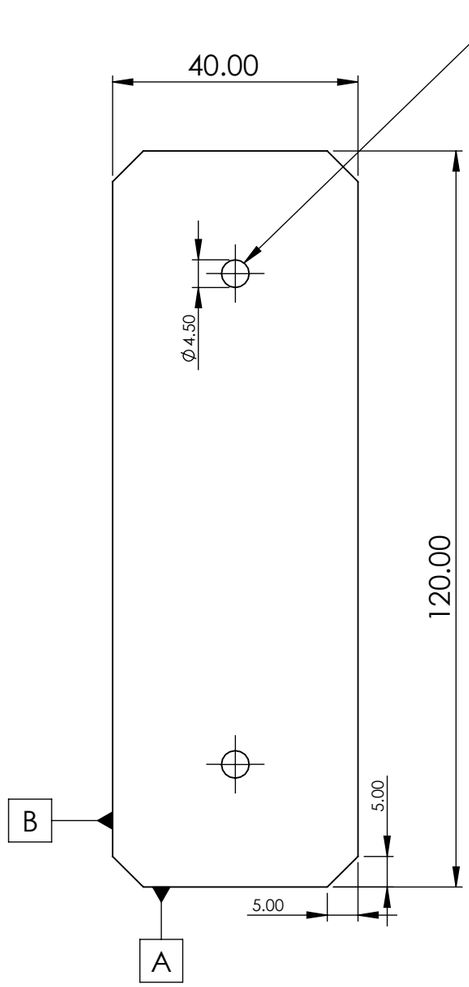

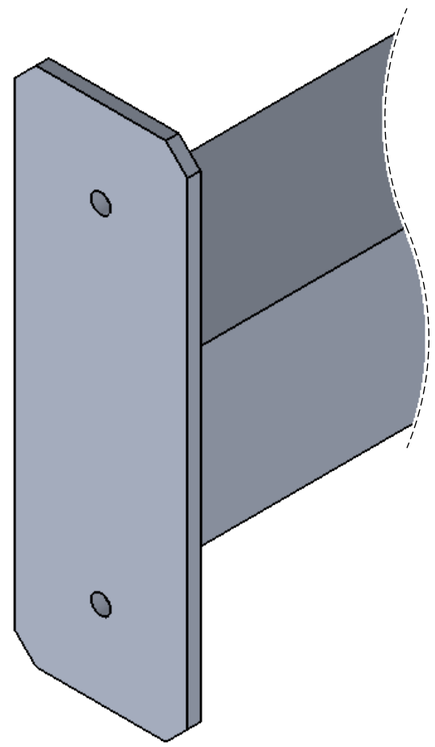



TITLE - RETRACTABLE ROOF				NIHVA TECHNOLOGIES PVT.LTD.PUNE
DWG NO - NTPL-276-001-02-02-000				Website - www.nihva.com
	NAME	SIGNATURE	DATE	PROJECT NO - NTPL-276-PM
DRAWN	V.W		29-03-2025	PRODUCT - RETRACTABLE ROOF
CHK'D	S.W		29-03-2025	SITE LOCATION - GUJARAT
APPV'D	V.T.		29-03-2025	
if any queries contact - supportautomation@nihva.com				REVISION - QTY - 81
ALL DIMENSION ARE IN mm		A3		SCALE - SHEET 5 OF 21

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	T PLATE	SS304 -117.5X156X3 MM THK	24

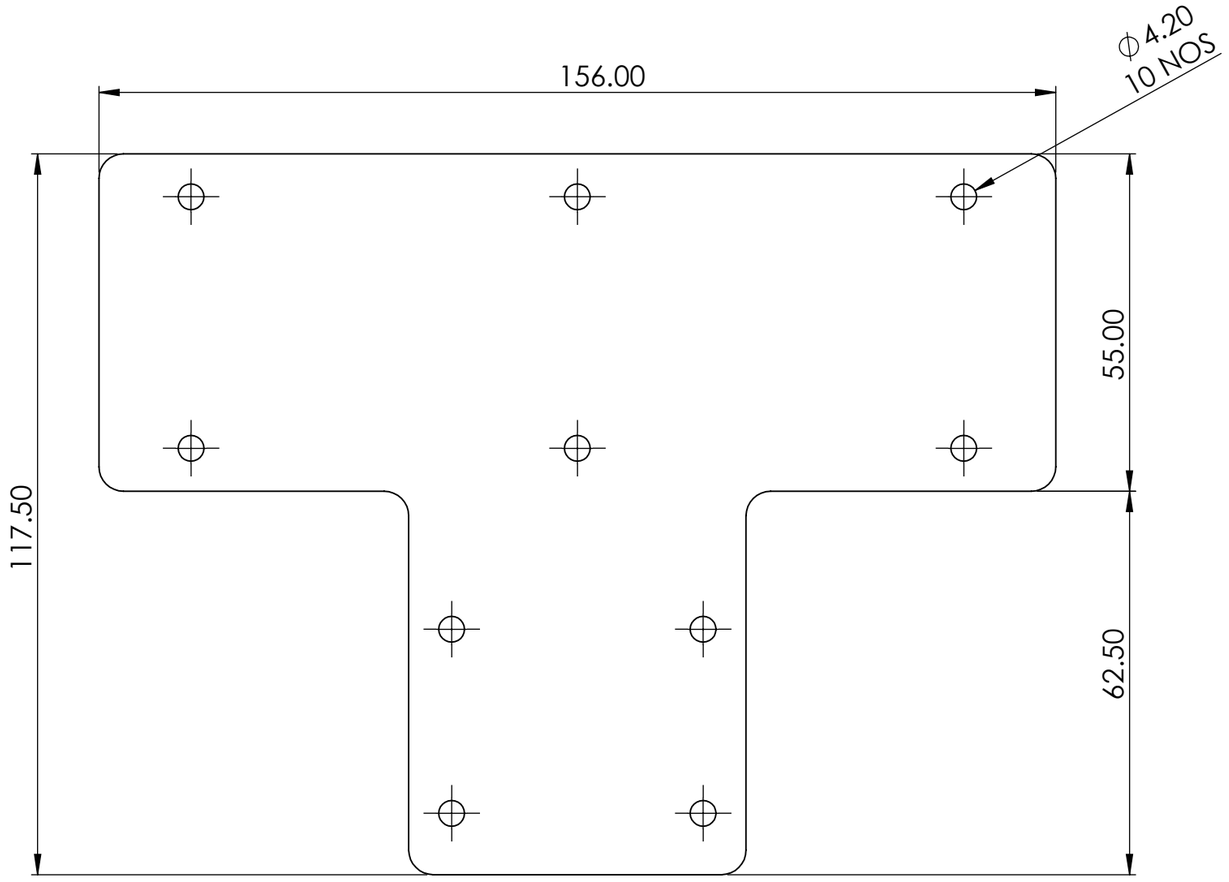

DEVELOPMENT VIEW

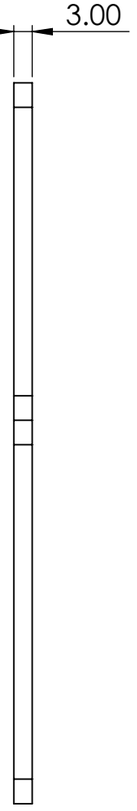


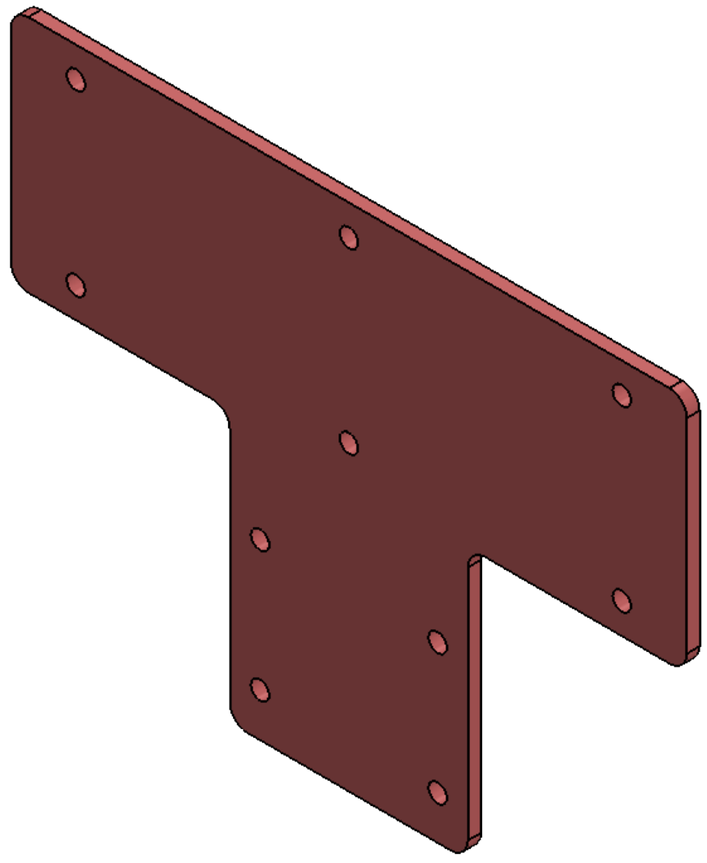


NOTE:
FOR ALL PANEL THIS PLATE IS USED
LASER CUTTING


TITLE - RETRACTABLE ROOF				NIHVA TECHNOLOGIES PVT.LTD.PUNE
DWG NO - NTPL-276-PM-001-02-03-000				Website - www.nihva.com
	NAME	SIGNATURE	DATE	PROJECT NO - NTPL-276-PM
DRAWN	V.W		29-03-2025	PRODUCT - RETRACTABLE ROOF
CHK'D	S.W		29-03-2025	SITE LOCATION - GUJARAT
APPV'D	V.T.		29-03-2025	
if any queries contact - supportautomation@nihva.com				REVISION - QTY - 24
ALL DIMENSION ARE IN mm			A3	SCALE - SHEET 6 OF 21

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	L PLATE	SS304- 91X106X3 MM THK	24

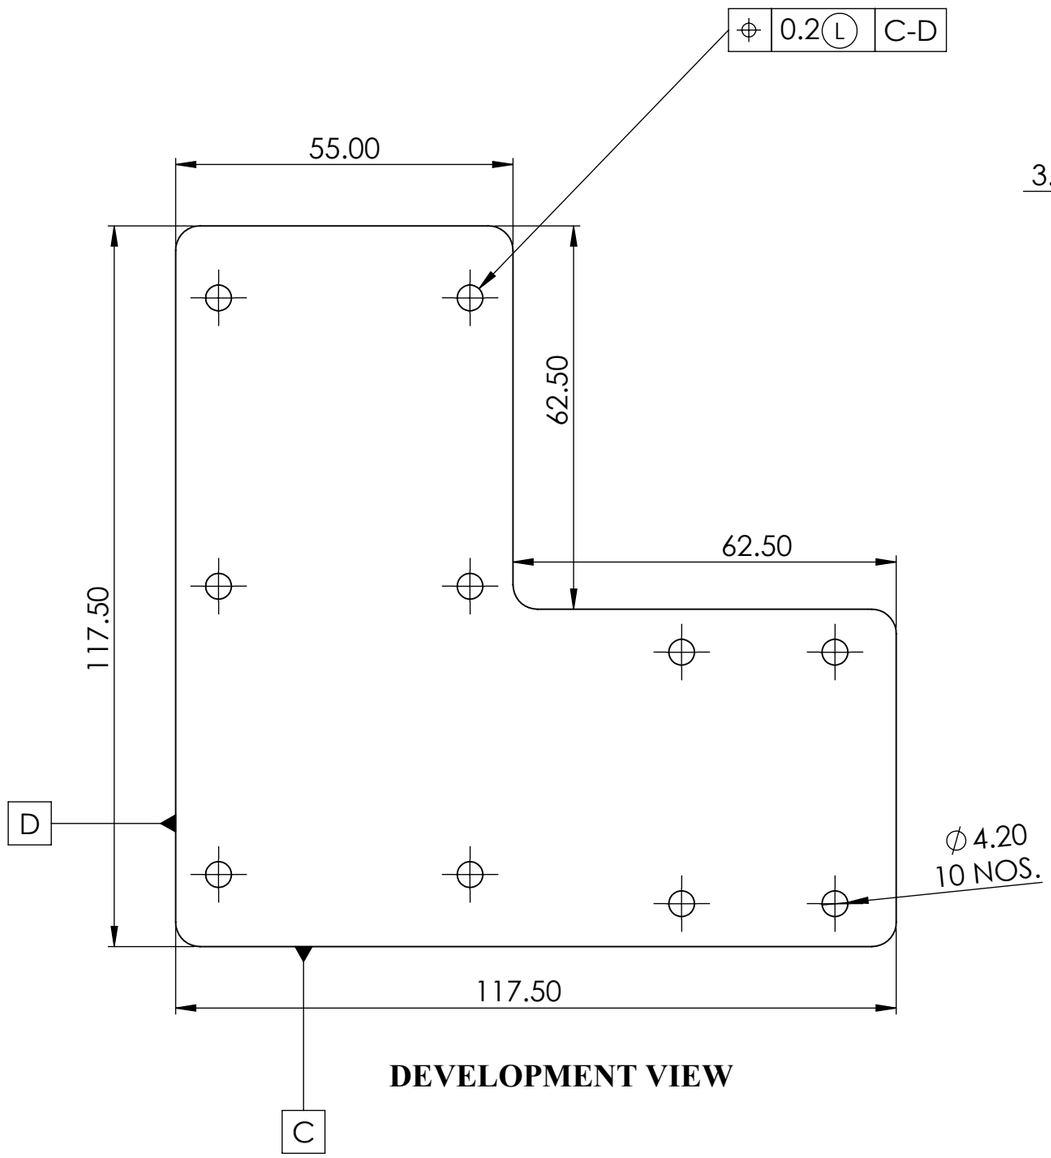

DEVELOPMENT VIEW

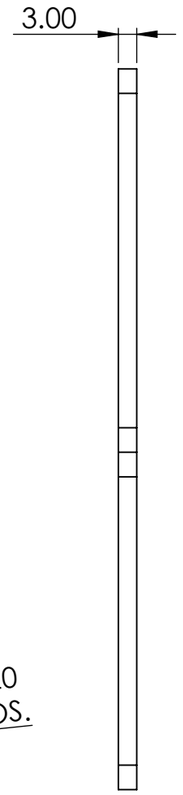


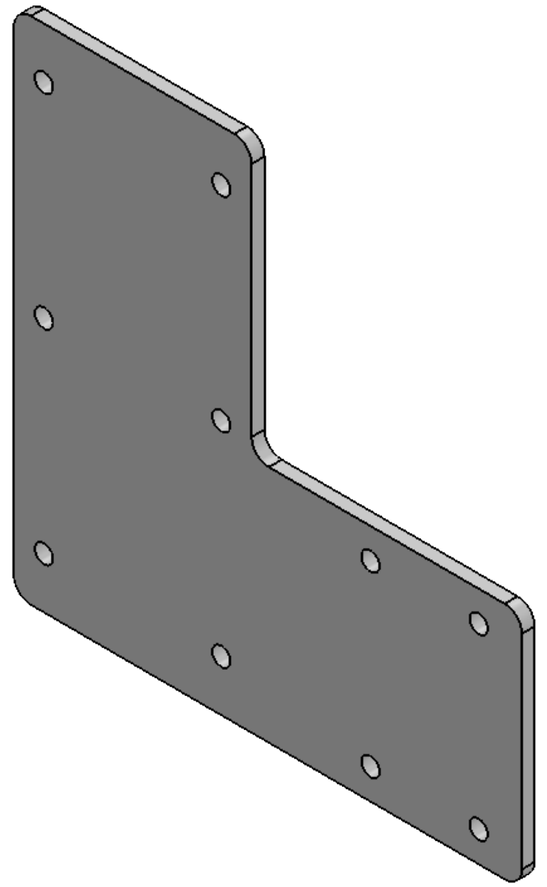


NOTE:
FOR ALL PANEL THIS PLATE IS USED
LASER CUTTING


TITLE - RETRACTABLE ROOF				NIHVA TECHNOLOGIES PVT.LTD.PUNE
DWG NO - NTPL-276-PM-001-02-04-000				Website - www.nihva.com
	NAME	SIGNATURE	DATE	PROJECT NO - NTPL-276-PM
DRAWN	V.W		29-03-2025	PRODUCT - RETRACTABLE ROOF
CHK'D	S.W		29-03-2025	SITE LOCATION - GUJARAT
APPV'D	V.T.		29-03-2025	
if any queries contact - supportautomation@nihva.com				REVISION - QTY - 24
ALL DIMENSION ARE IN mm			A3	SCALE - SHEET 7 OF 21


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	L ANGLE PLATE	SS304 - 60X60X3 MM	36

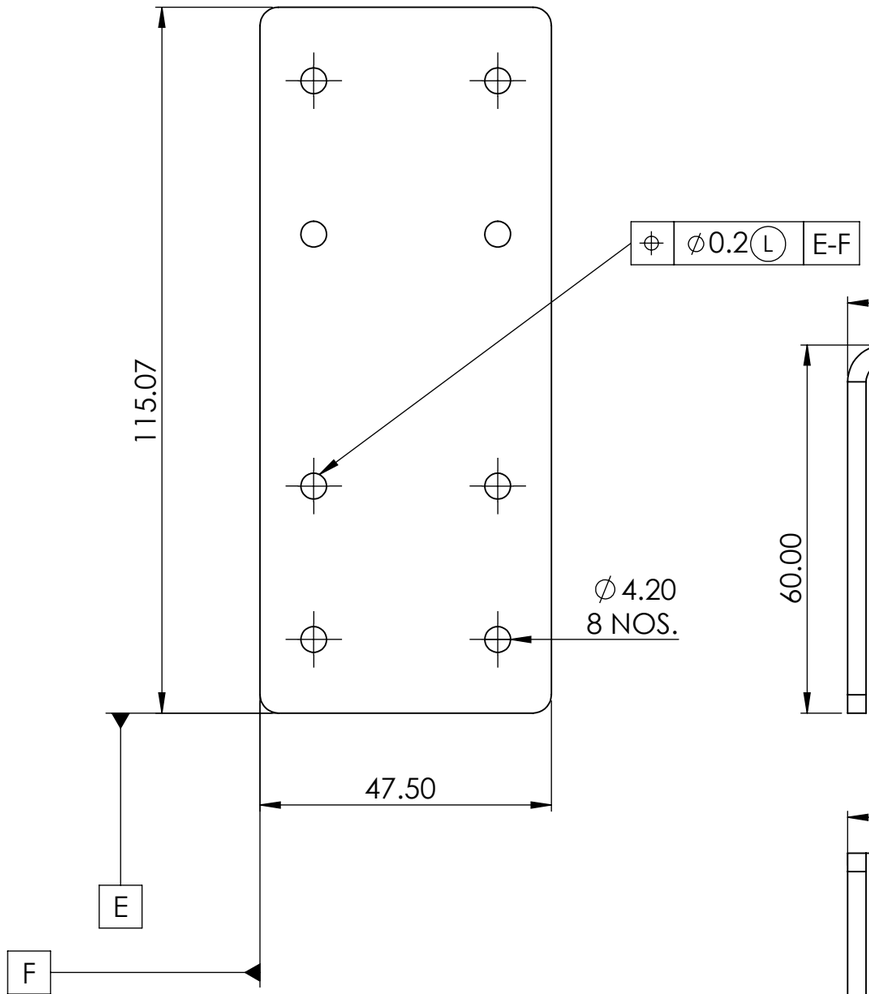

DEVELOPMENT VIEW

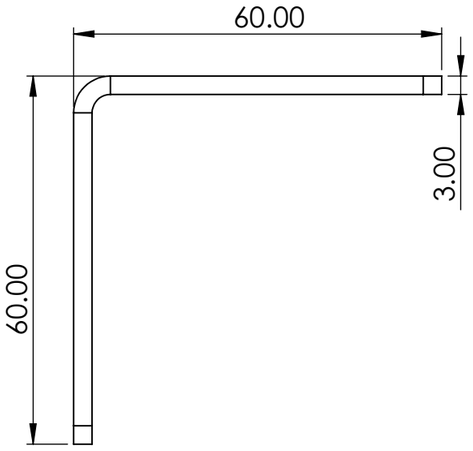

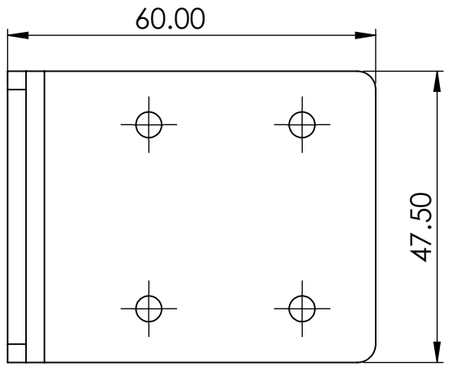


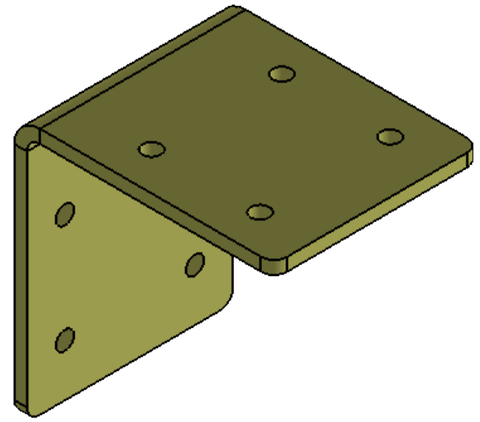


NOTE:
FOR ALL PANEL THIS PLATE IS USED
LASER CUTTING

TITLE - RETRACTABLE ROOF				NIHVA TECHNOLOGIES PVT.LTD.PUNE
DWG NO - NTPL-276-PM-001-02-05-000				Website - www.nihva.com
	NAME	SIGNATURE	DATE	PROJECT NO - NTPL-276-PM
DRAWN	V.W		29-03-2025	PRODUCT - RETRACTABLE ROOF
CHK'D	S.W		29-03-2025	SITE LOCATION - GUJARAT
APPV'D	V.T.		29-03-2025	
if any queries contact - supportautomation@nihva.com				REVISION - QTY - 36
ALL DIMENSION ARE IN mm		A3		SCALE - SHEET 8 OF 21


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	2D DRAWING SALAVI MAM PROFILE L ANGLE WELDING PLATE	ALUMINIUM JOINING PLATE	12

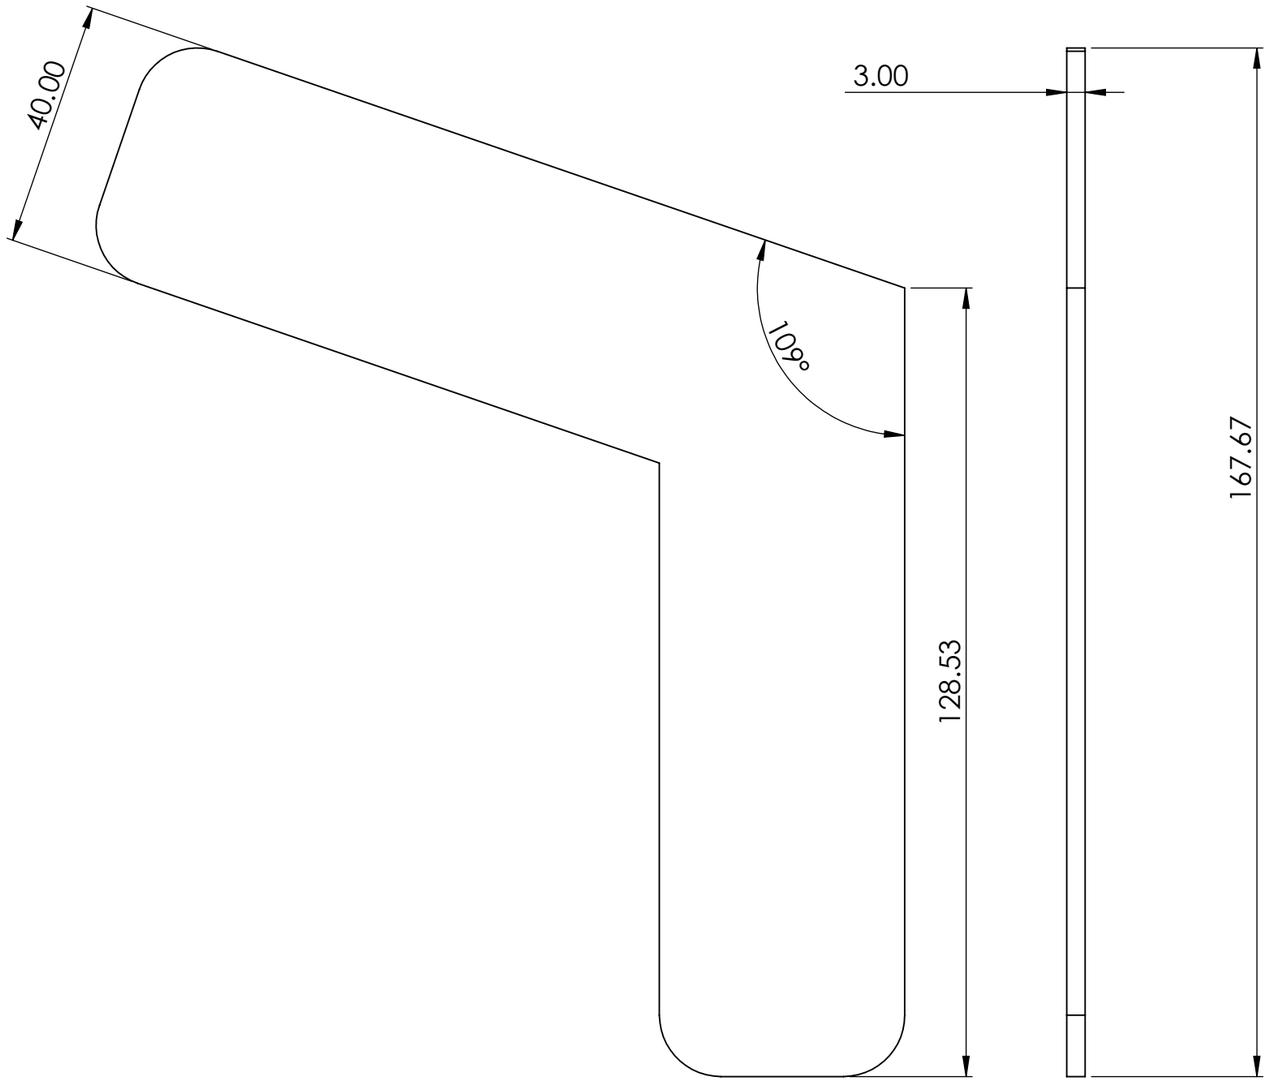

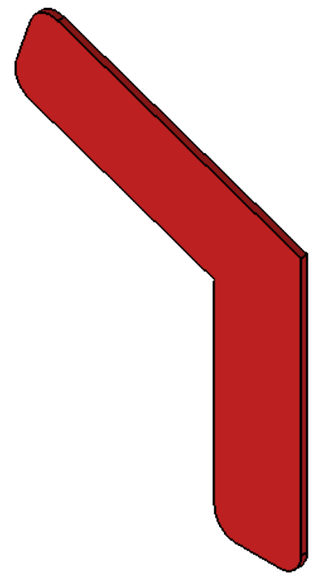


NOTE:
FOR ALL PANEL THIS PLATE IS USED
LASER CUTTING

TITLE - RETRACTABLE ROOF				NIHVA TECHNOLOGIES PVT.LTD.PUNE Website - www.nihva.com
DWG NO - NTPL-276-PM-001-02-06-000				
	NAME	SIGNATURE	DATE	PROJECT NO - NTPL-276-PM
DRAWN	V.W		29-03-2025	PRODUCT - RETRACTABLE ROOF
CHK'D	S.W		29-03-2025	SITE LOCATION - GUJARAT
APPV'D	V.T.		29-03-2025	
if any queries contact - supportautomation@nihva.com				REVISION - QTY - 12
ALL DIMENSION ARE IN mm			A3	SCALE - SHEET 9 OF 21

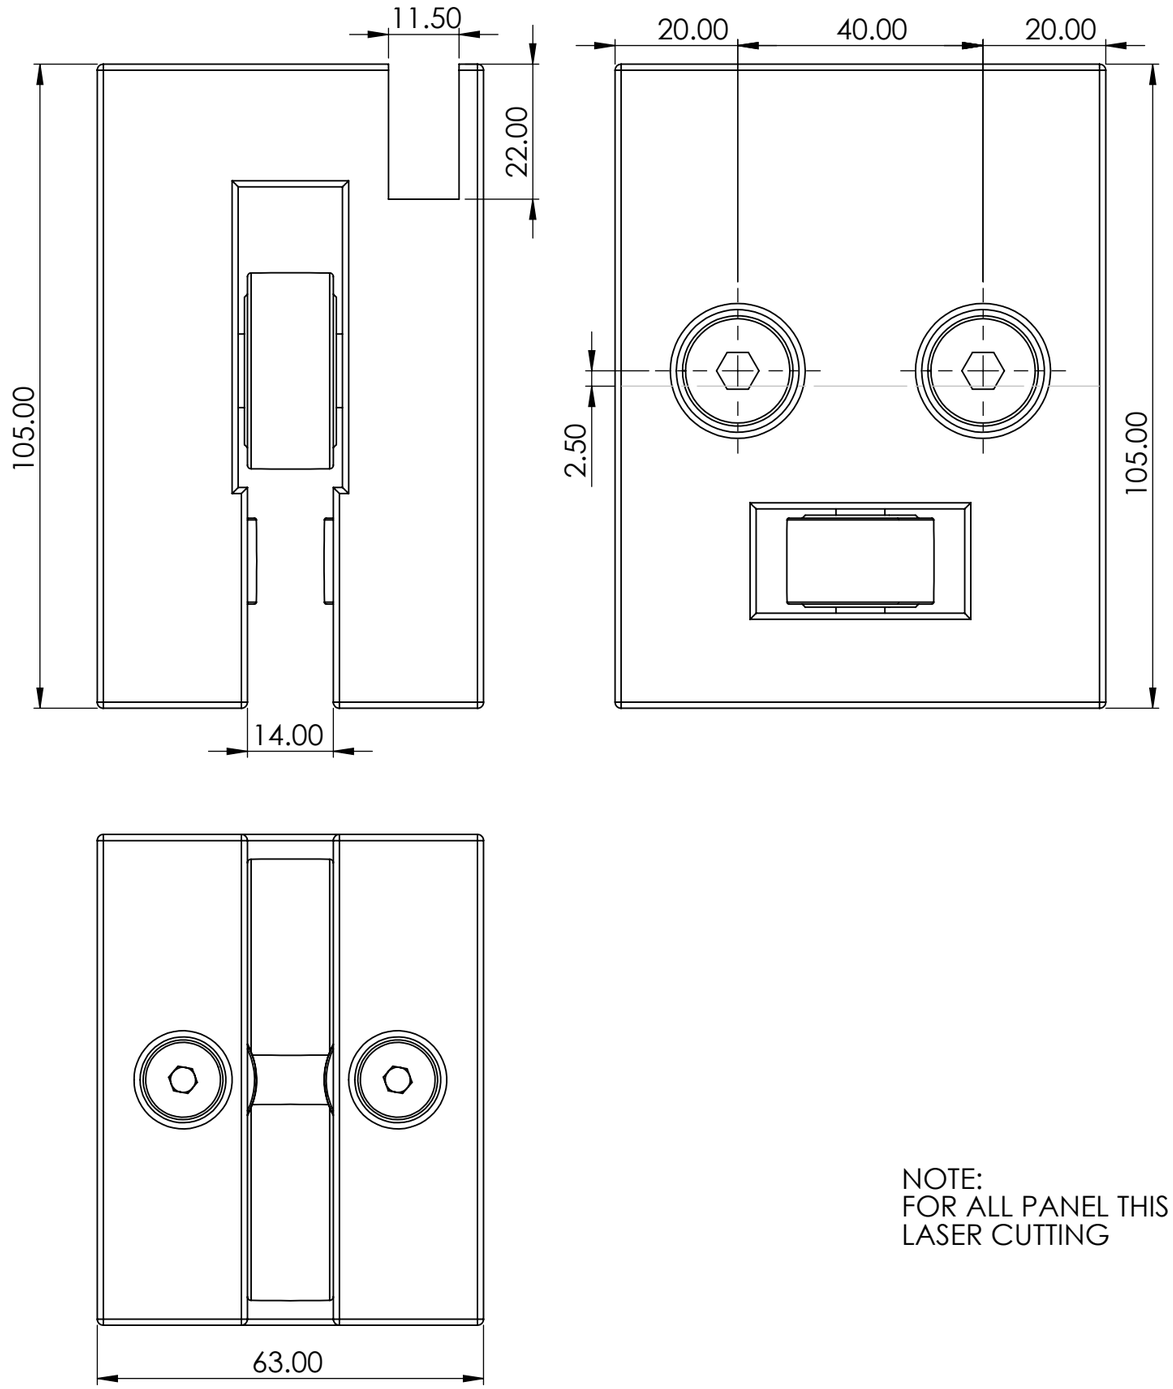



ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	BEARING BLOCK (T75-1B)	80X105X63 MM (VMC PART)	12
2	SKF_NATR 12	BRG(STD)	24
3	SKF_NATR 8	BRG(STD)	24
4	2D DRAWING SALAVI MAM SHOULDER BOLT NATR 12		24
5	ISO 7379 - 8 x 30 --- N		24

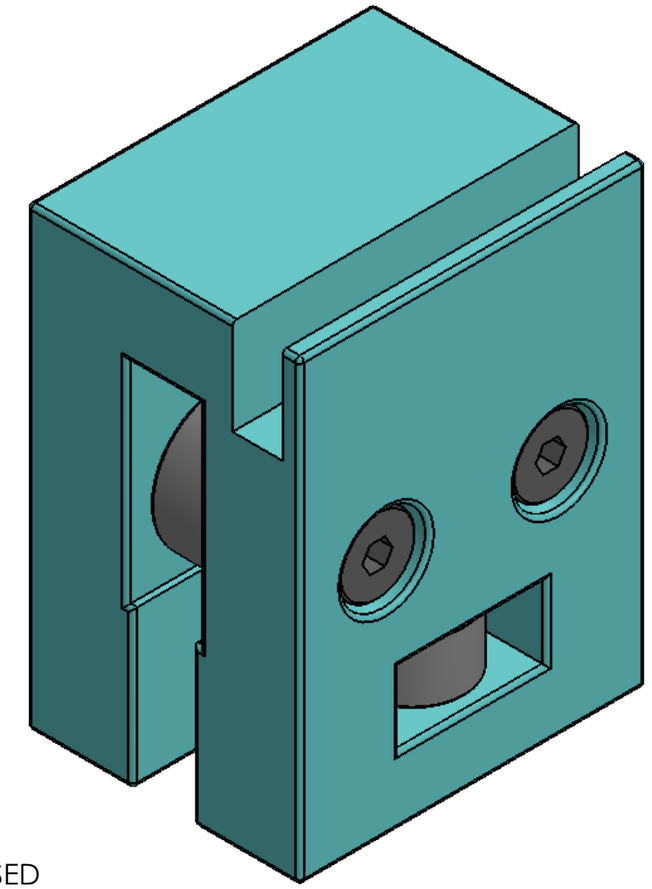


NOTE:
FOR ALL PANEL THIS BEARING BLOCK IS USED
LASER CUTTING

TITLE - RETRACTABLE ROOF				NIHVA TECHNOLOGIES PVT.LTD.PUNE
DWG NO - NTPL-276-PM-001-02-07-000				Website - www.nihva.com
	NAME	SIGNATURE	DATE	PROJECT NO - NTPL-276-PM
DRAWN	V.W		29-03-2025	PRODUCT - RETRACTABLE ROOF
CHK'D	S.W		29-03-2025	SITE LOCATION - GUJARAT
APPV'D	V.T.		29-03-2025	
if any queries contact - supportautomation@nihva.com				REVISION - QTY - 12
ALL DIMENSION ARE IN mm		A3		SCALE - SHEET 10 OF 21

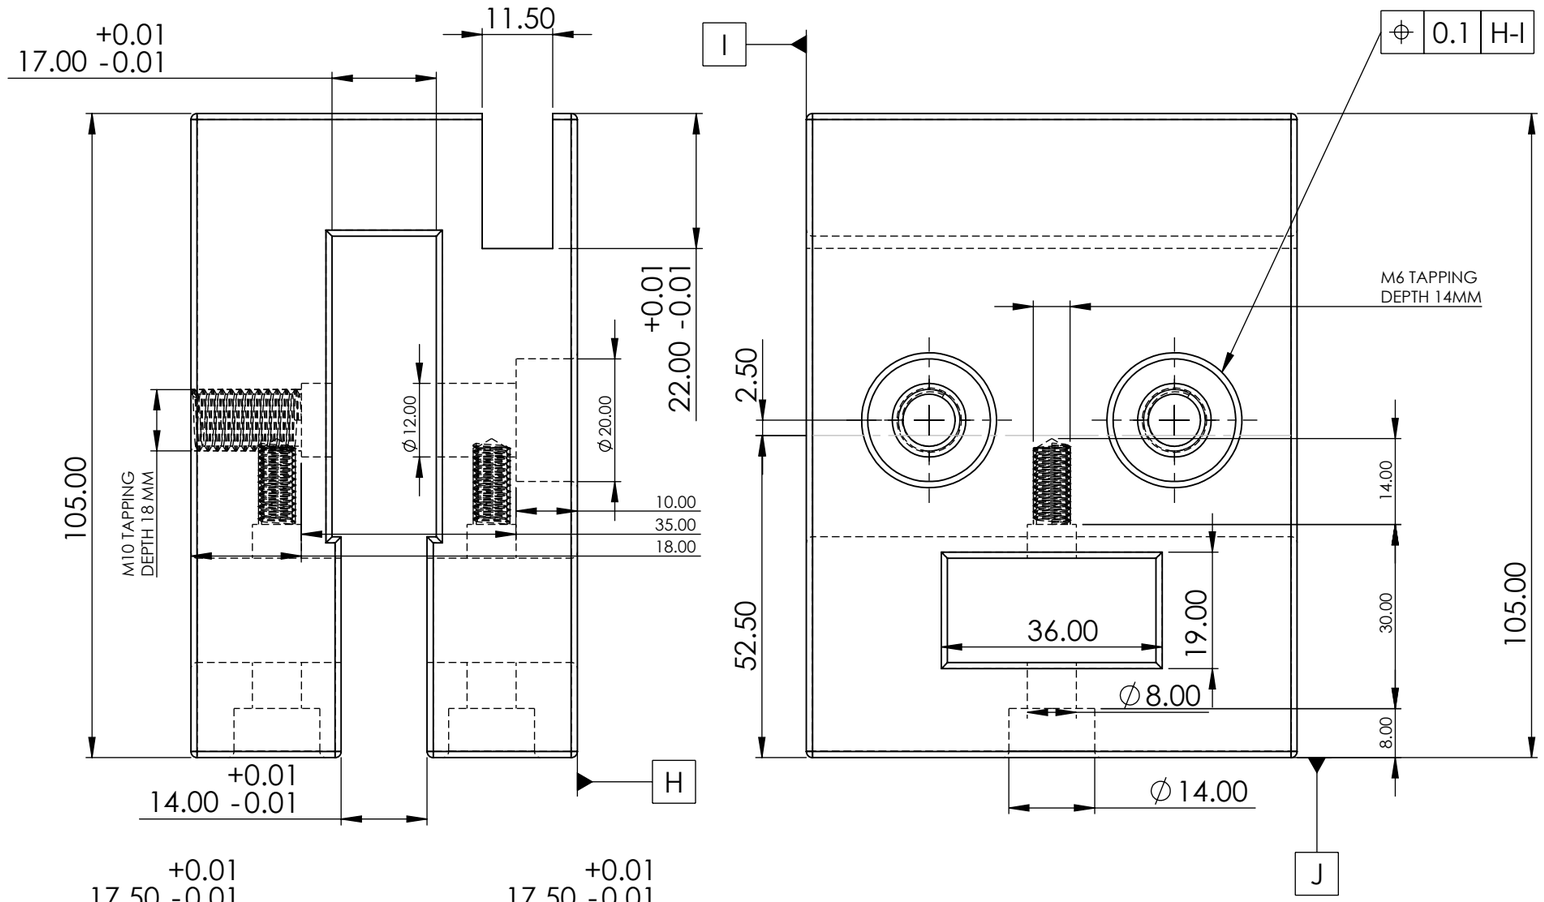

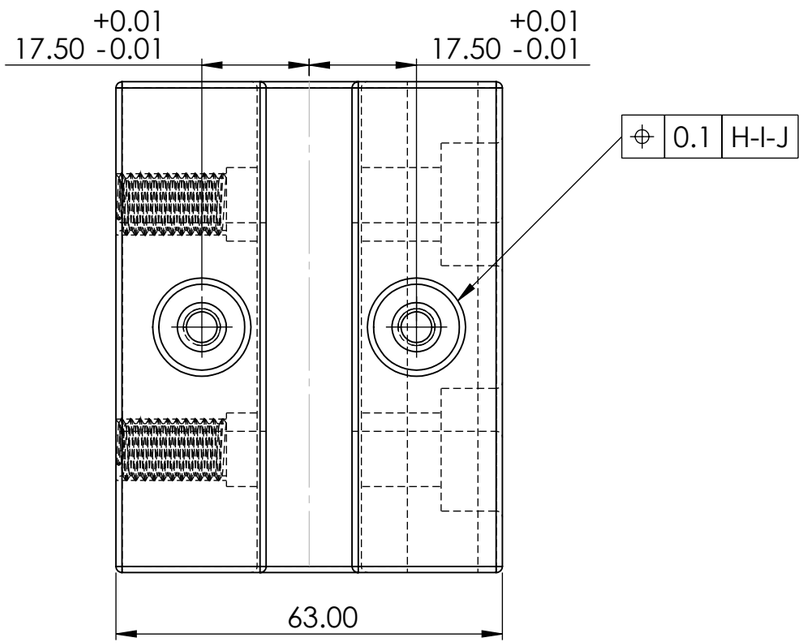


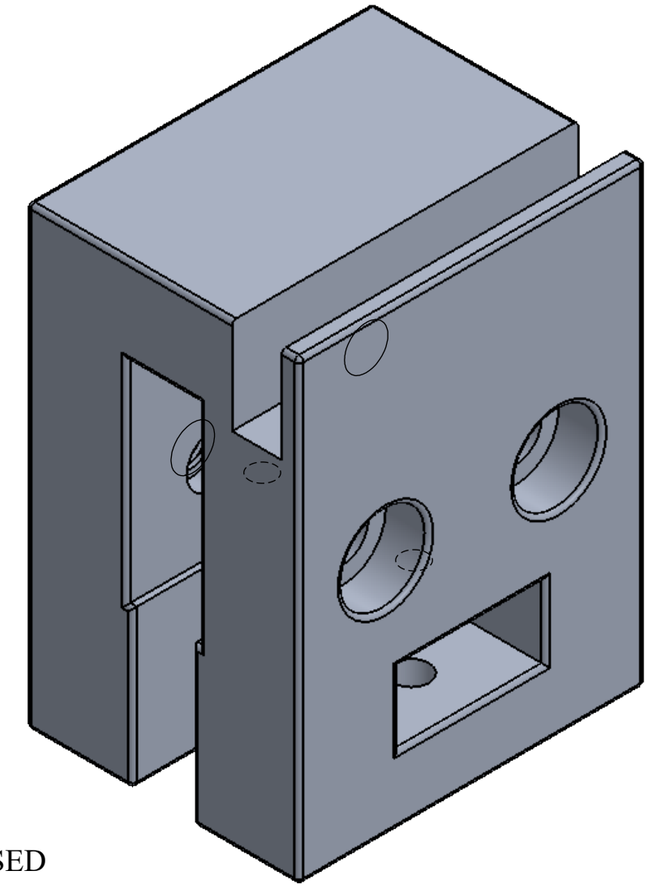


NOTE
FOR ALL PANEL THIS BLOCK IS USED
VMC MACHINING


TITLE - RETRACTABLE ROOF				NIHVA TECHNOLOGIES PVT.LTD.PUNE
DWG NO - NTPL-276-PM-001-02-08-000				Website - www.nihva.com
	NAME	SIGNATURE	DATE	PROJECT NO - NTPL-276-PM
DRAWN	V.W		29-03-2025	PRODUCT - RETRACTABLE ROOF
CHK'D	S.W		29-03-2025	SITE LOCATION - GUJARAT
APPV'D	V.T.		29-03-2025	
if any queries contact - supportautomation@nihva.com				REVISION - QTY - 1
ALL DIMENSION ARE IN mm		A3		SCALE - SHEET 11 OF 21

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	2D DRAWING SALAVI MAM ENCLOSURE NTPL-268-PM-PANEL_01	ENCLOSURE _01	1

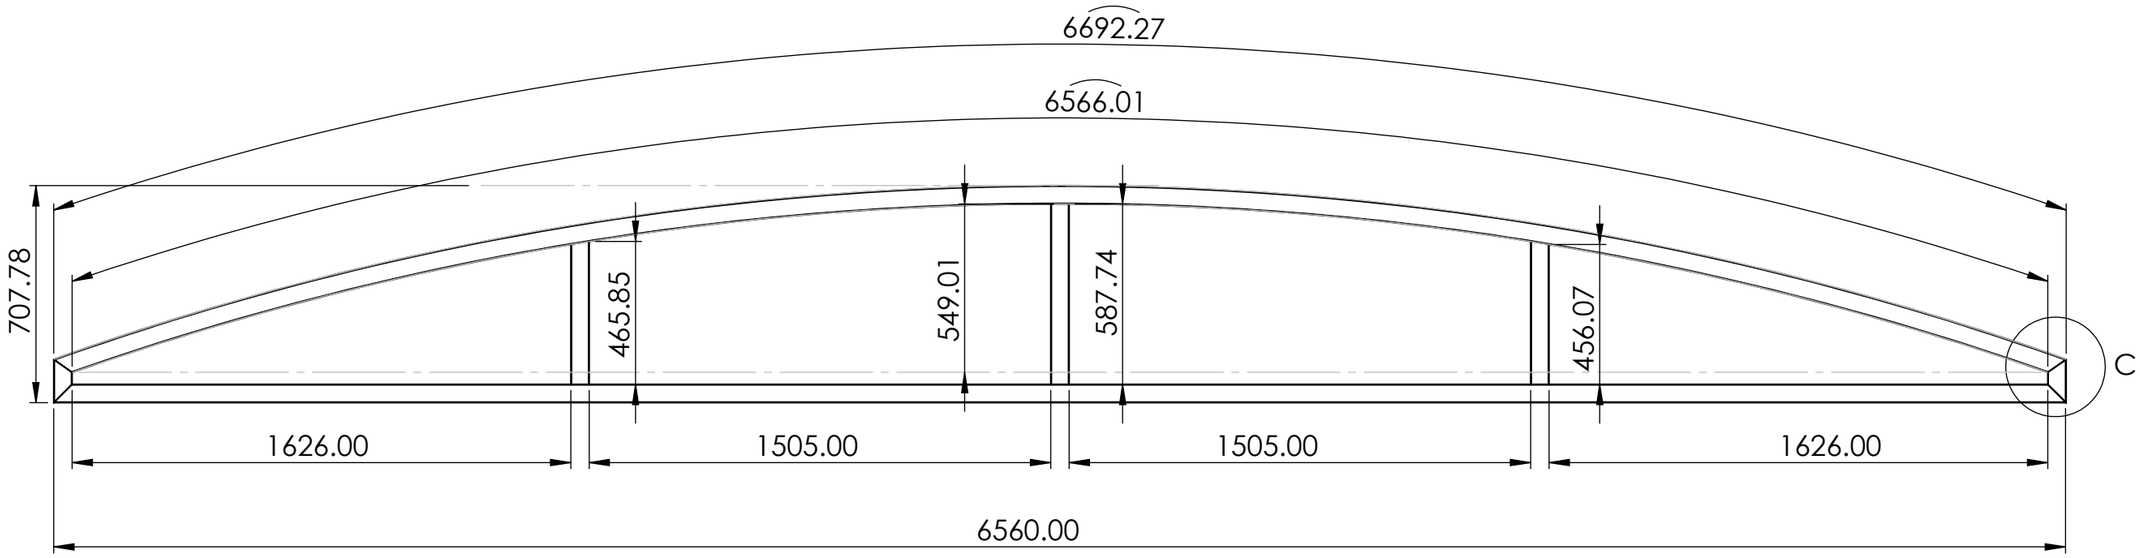

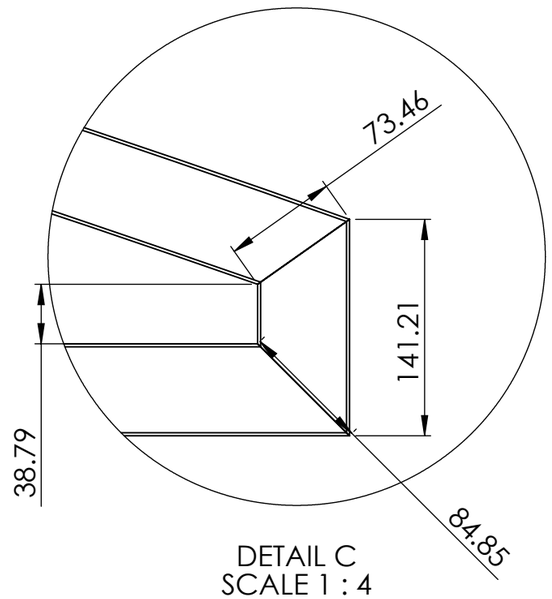


DETAIL C
SCALE 1 : 4

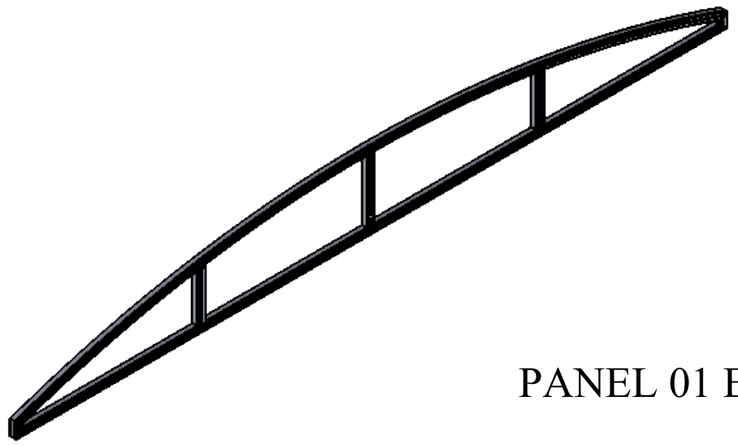


PANEL 01 ENCLOSER

TITLE - RETRACTABLE ROOF			NIHVA TECHNOLOGIES PVT.LTD.PUNE Website - www.nihva.com
DWG NO - NTPL-276-PM-001-02-09-000			
	NAME	SIGNATURE	DATE
DRAWN	V.W		29-03-2025
CHK'D	S.W		29-03-2025
APPV'D	V.T.		29-03-2025
if any queries contact - supportautomation@nihva.com			REVISION -
ALL DIMENSION ARE IN mm		A3	SCALE -


PROJECT NO - NTPL-276-PM
PRODUCT - RETRACTABLE ROOF
SITE LOCATION - GUJARAT
QTY - 1
SHEET 12 OF 21

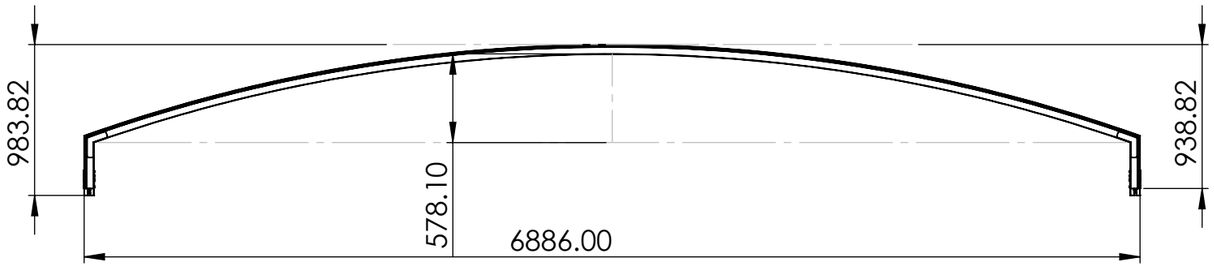

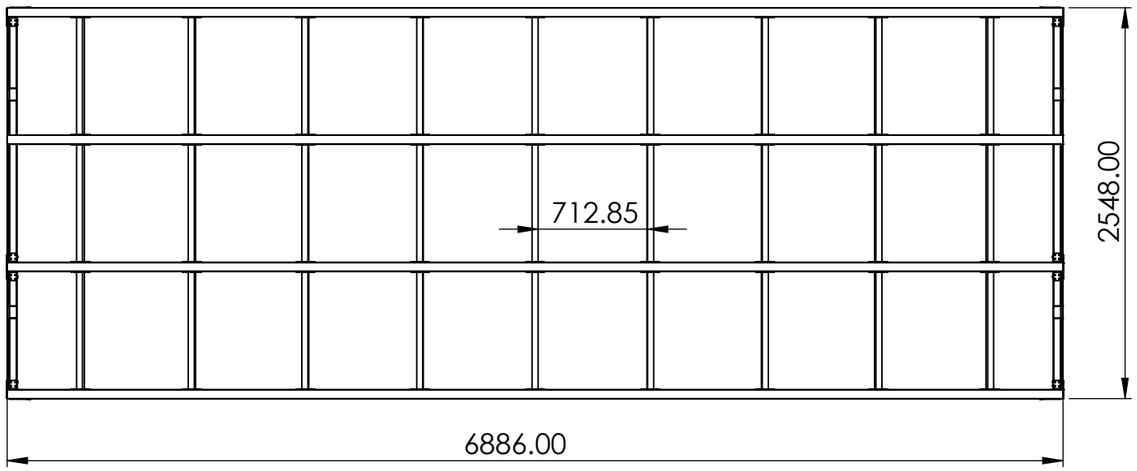


PANEL 02

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	2D DRAWING SALAVI MAM NTPL-268-PM-PANEL_02	PANEL_02 FRAME	1
2	AL Support tube SQ TUBE 40X40X1.5 MM L-734 MM	AL INTERMEDIAT SUPPORT TUBE	27
3	2D DRAWING SALAVI MAM rivet_iso_15977_4_x_16_0	RIVET M4X16	79
4	T PLATE	JOINING PLATE	4
5	L PALTE	JOINING PLATE	8
6	L ANGLE PLATE	JOINING PLATE	8
7	2D DRAWING SALAVI MAM PROFILE L ANGLE WELDING PLATE	ALUMINIUM JOINING PLATE	4
8	2D DRAWING SALAVI MAM BEARING BLOCK ASM WITH SHOULDER BOLT	SLIDING BLOCK	4

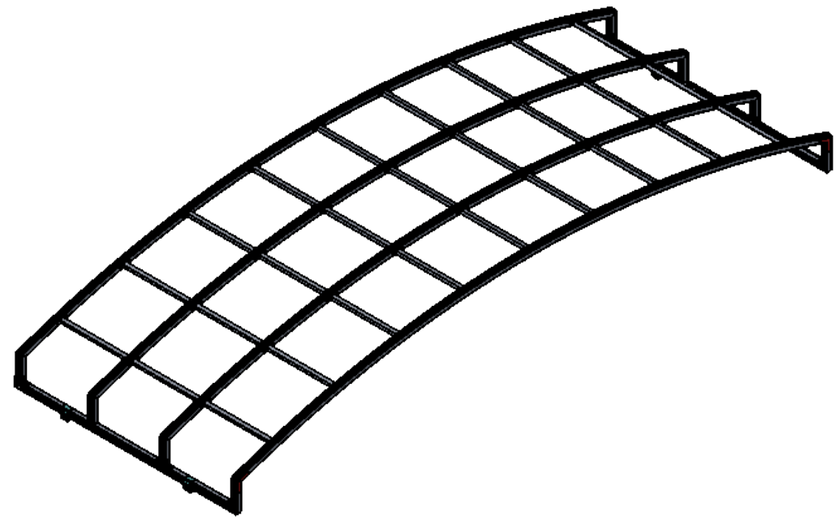



TITLE - RETRACTABLE ROOF				NIHVA TECHNOLOGIES PVT.LTD.PUNE
DWG NO - NTPL-276-PM-001-03-000-05				Website - www.nihva.com
	NAME	SIGNATURE	DATE	PROJECT NO - NTPL-276-PM
DRAWN	V.W		29-03-2025	PRODUCT - RETRACTABLE ROOF
CHK'D	S.W		29-03-2025	SITE LOCATION - GUJARAT
APPV'D	V.T.		29-03-2025	
if any queries contact - supportautomation@nihva.com				REVISION - QTY - 1
ALL DIMENSION ARE IN mm			A3	SCALE - SHEET 13 OF 21

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	2D DRAWING SALAVI MAM NTPL-268-PM-PANEL_02	PANEL_02 FRAME	1

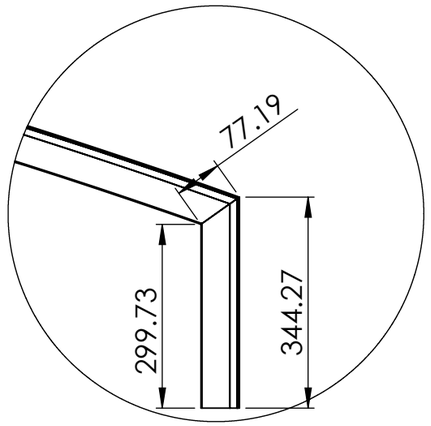

DETAIL D
SCALE 1 : 10

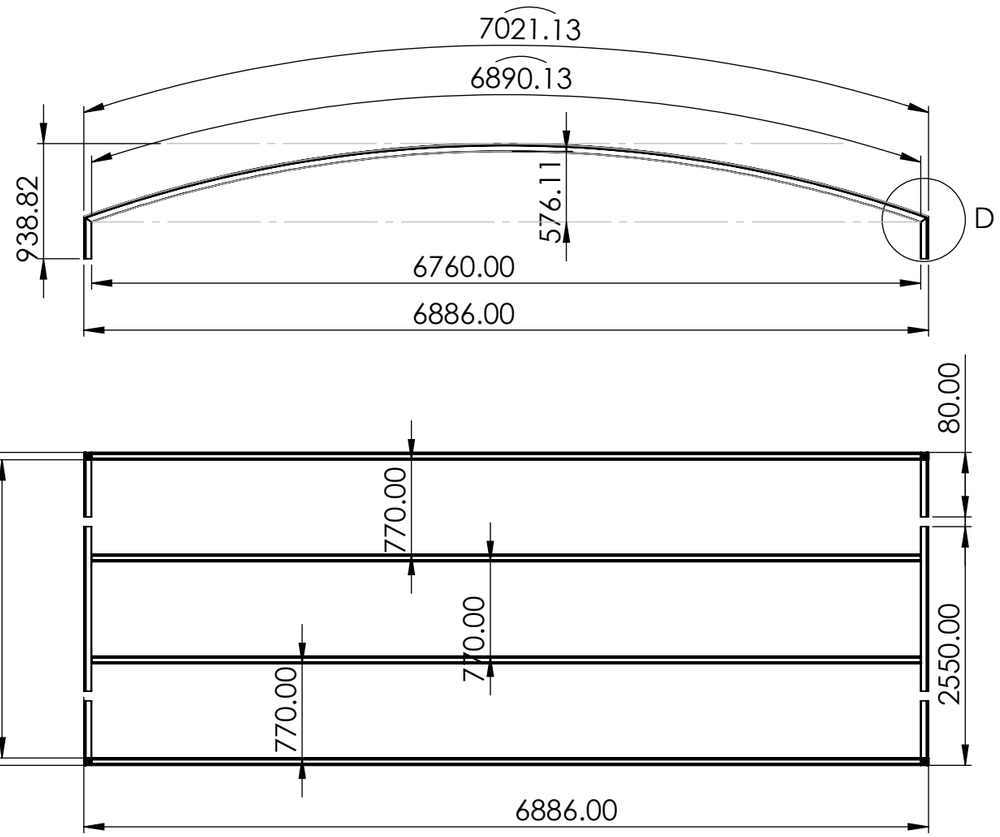


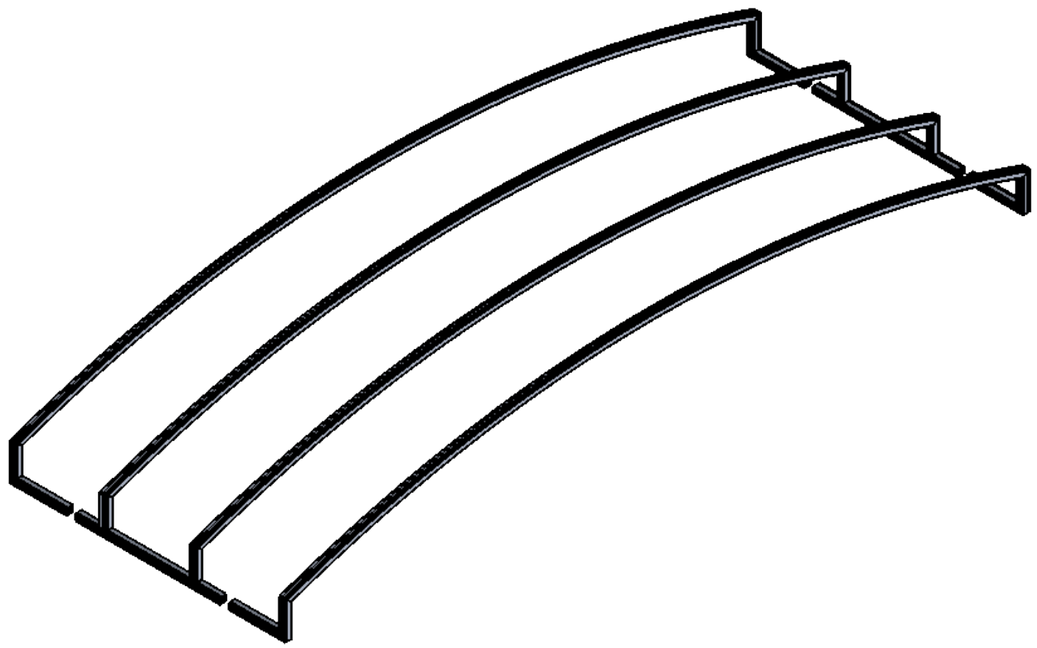



PANEL 02

TITLE - RETRACTABLE ROOF				NIHVA TECHNOLOGIES PVT.LTD.PUNE
DWG NO - NTPL-276-PM-001-03-000-000				Website - www.nihva.com
	NAME	SIGNATURE	DATE	PROJECT NO - NTPL-276-PM
DRAWN	V.W		29-03-2025	PRODUCT - RETRACTABLE ROOF
CHK'D	S.W		29-03-2025	SITE LOCATION - GUJARAT
APPV'D	V.T.		29-03-2025	
if any queries contact - supportautomation@nihva.com				REVISION - QTY - 1
ALL DIMENSION ARE IN mm			A3	SCALE - SHEET 14 OF 21

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	2D DRAWING SALAVI MAM NTPL-268-PM-PANEL_03	PANEL_03 FRAME	1
2	AL Support tube SQ TUBE 40X40X1.5 MM L-734 MM	AL INTERMEDIAT SUPPORT TUBE	27
3	2D DRAWING SALAVI MAM rivet_iso_15977_4_x_16_0	RIVET M4X16	79
4	T PLATE	JOINING PLATE	4
5	L PALTE	JOINING PLATE	8
6	L ANGLE PLATE	JOINING PLATE	8
7	2D DRAWING SALAVI MAM PROFILE L ANGLE WELDING PLATE	ALUMINIUM JOINING PLATE	4
8	2D DRAWING SALAVI MAM BEARING BLOCK ASM WITH SHOULDER BOLT	SLIDING BLOCK	4
9	2D DRAWING SALAVI MAM ENCLOSURE NTPL-268-PM-PANEL_03	ENCLOSURE _03	1
10	2D DRAWING EPDM RUBBER_BIG PANEL		1

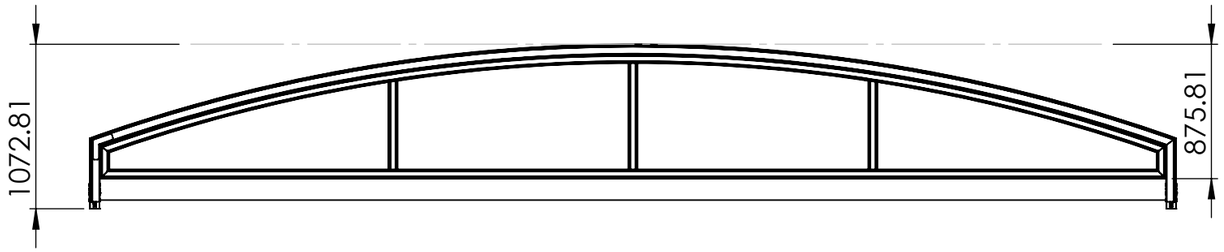

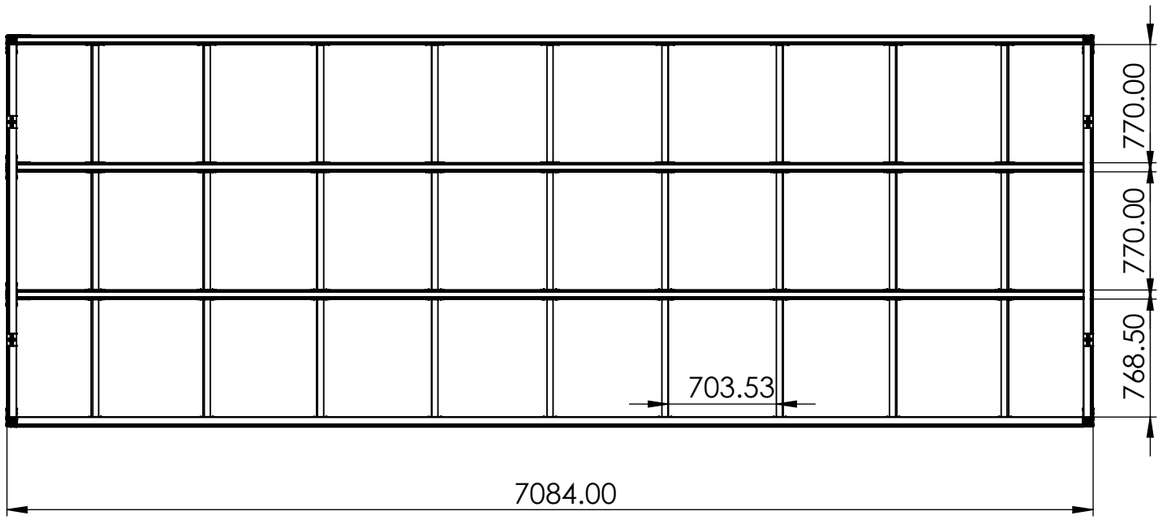


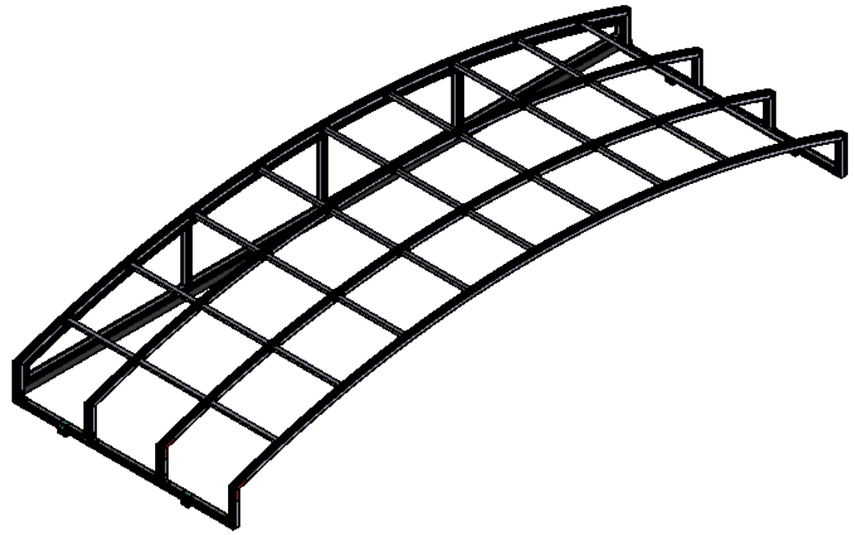


PANEL 03


TITLE - RETRACTABLE ROOF				NIHVA TECHNOLOGIES PVT.LTD.PUNE
DWG NO - NTPL-276-PM-001-04-000-06				Website - www.nihva.com
	NAME	SIGNATURE	DATE	PROJECT NO - NTPL-276-PM
DRAWN	V.W		29-03-2025	PRODUCT - RETRACTABLE ROOF
CHK'D	S.W		29-03-2025	SITE LOCATION - GUJARAT
APPV'D	V.T.		29-03-2025	
if any queries contact - supportautomation@nihva.com				REVISION - QTY - 1
ALL DIMENSION ARE IN mm			A3	SCALE - SHEET 15 OF 21


ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	2D DRAWING SALAVI MAM NTPL-268-PM-PANEL_03	PANEL_03 FRAME	1

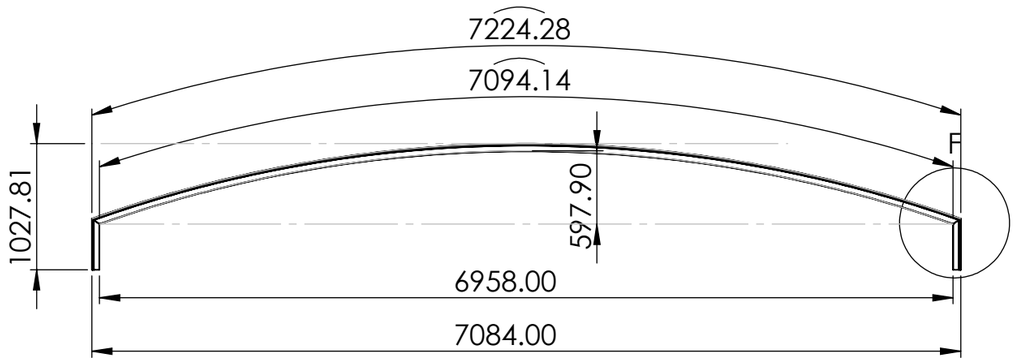

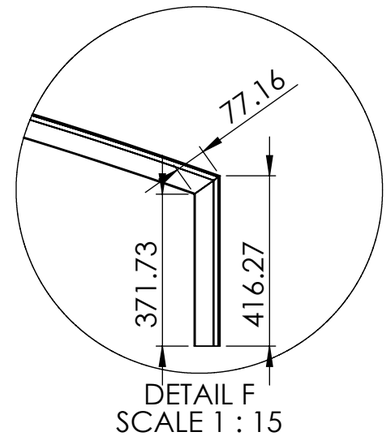

DETAIL F
SCALE 1 : 15

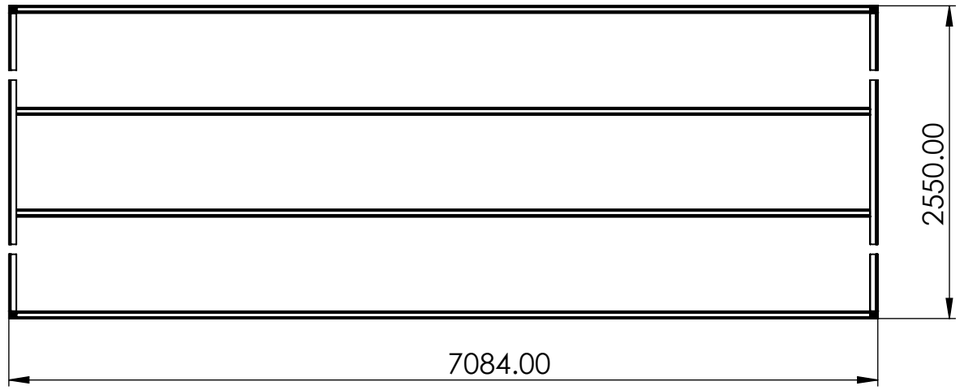


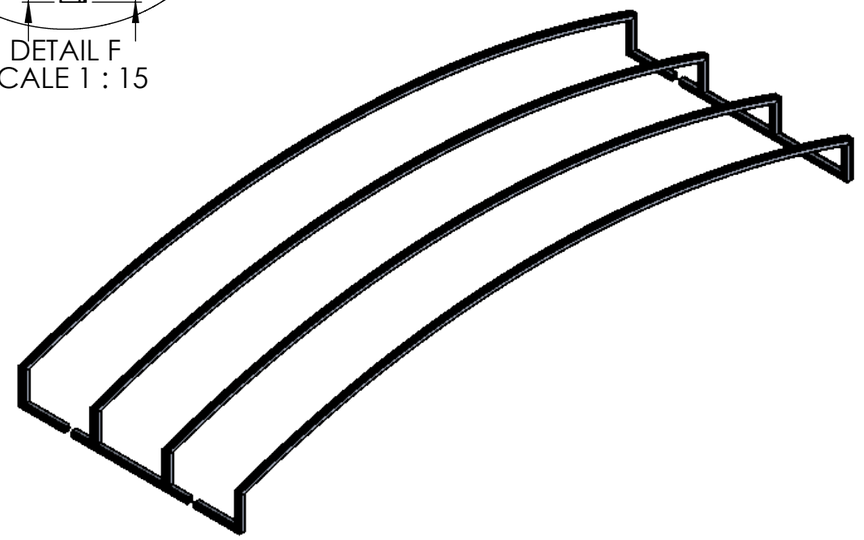


PANEL 03


TITLE - RETRACTABLE ROOF				NIHVA TECHNOLOGIES PVT.LTD.PUNE
DWG NO - NTPL-276-PM-01-04-01-000				Website - www.nihva.com
	NAME	SIGNATURE	DATE	PROJECT NO - NTPL-276-PM
DRAWN	V.W		29-03-2025	PRODUCT - RETRACTABLE ROOF
CHK'D	S.W		29-03-2025	SITE LOCATION - GUJARAT
APPV'D	V.T.		29-03-2025	
if any queries contact - supportautomation@nihva.com				REVISION - QTY - 1
ALL DIMENSION ARE IN mm		A3		SCALE - SHEET 16 OF 21

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	2D DRAWING SALAVI MAM ENCLOSURE NTPL-268-PM-PANEL_03	ENCLOSURE _03	1

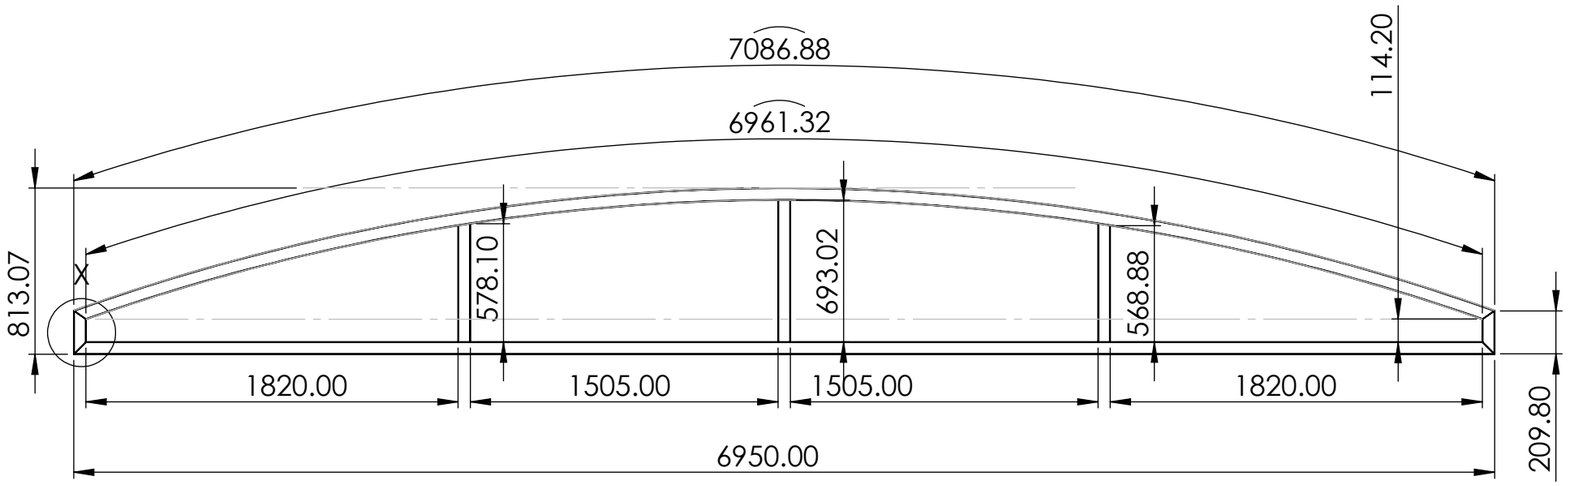

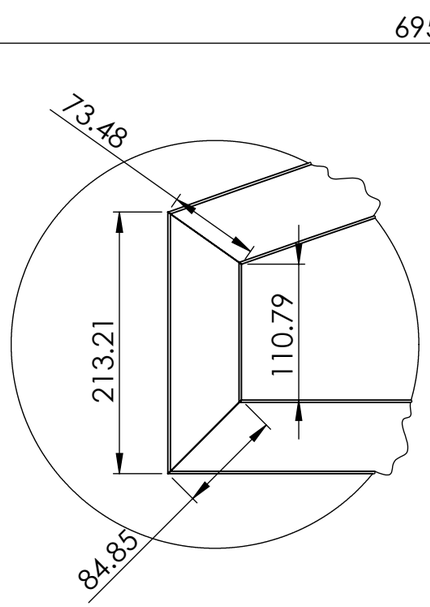


DETAIL X
SCALE 1 : 5

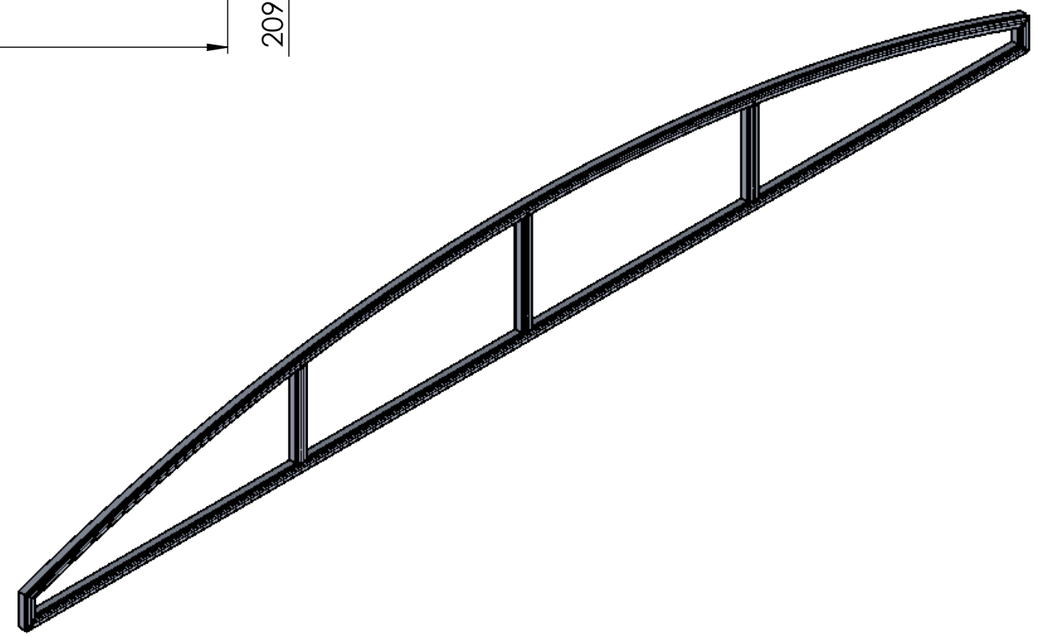


PANEL 03 ENCLOSER

TITLE - RETRACTABLE ROOF				NIHVA TECHNOLOGIES PVT.LTD.PUNE
DWG NO - NTPL-276-PM-001-04-01-000				Website - www.nihva.com
	NAME	SIGNATURE	DATE	PROJECT NO - NTPL-276-PM
DRAWN	V.W		29-03-2025	PRODUCT - RETRACTABLE ROOF
CHK'D	S.W		29-03-2025	SITE LOCATION - GUJARAT
APPV'D	V.T.		29-03-2025	
if any queries contact - supportautomation@nihva.com				REVISION - QTY - 1
ALL DIMENSION ARE IN mm		A3		SCALE - SHEET 17 OF 21

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	MOTOR MTG BRACKET NICE 1T	MS	1
2	2D DRAWING SALAVI MAM NICE RB 1T		1

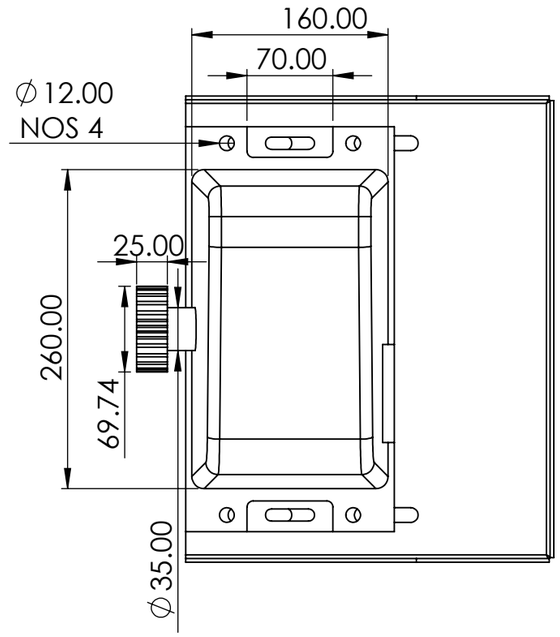


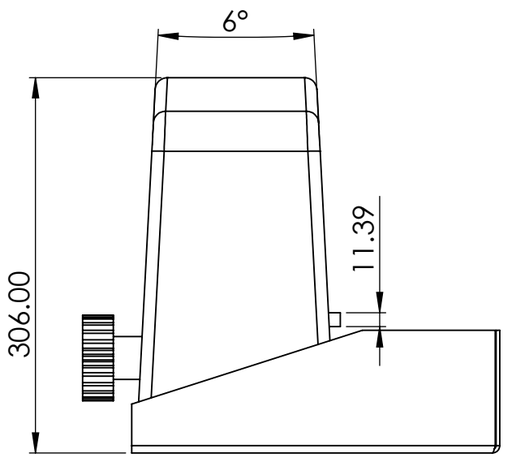



NICE RB 1T


TITLE - RETRACTABLE ROOF				NIHVA TECHNOLOGIES PVT.LTD.PUNE
DWG NO - NTPL-276-PM-001-05-000-07				Website - www.nihva.com
	NAME	SIGNATURE	DATE	PROJECT NO - NTPL-276-PM
DRAWN	V.W		29-03-2025	PRODUCT - RETRACTABLE ROOF
CHK'D	S.W		29-03-2025	SITE LOCATION - GUJARAT
APPV'D	V.T.		29-03-2025	
if any queries contact - supportautomation@nihva.com				REVISION - QTY - 1
ALL DIMENSION ARE IN mm			A3	SCALE - SHEET 18 OF 21

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	MOTOR MTG BRACKET NICE 1T	MS	1
		Sheet	1

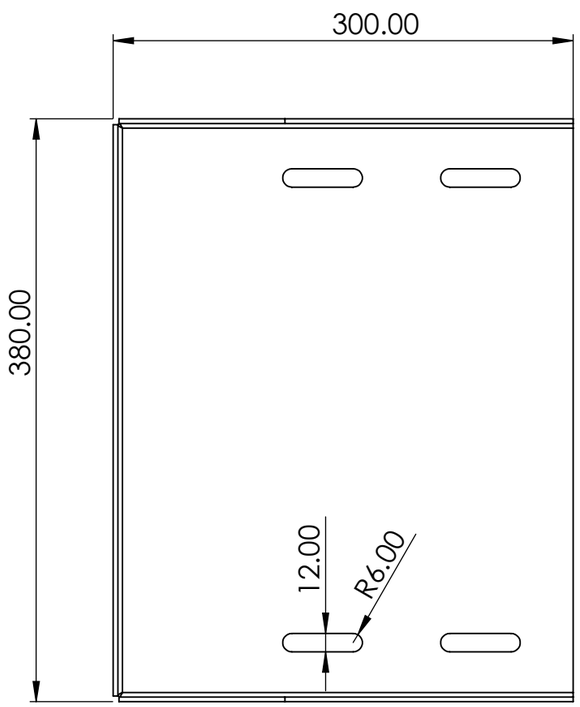

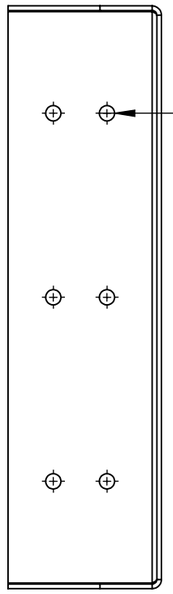

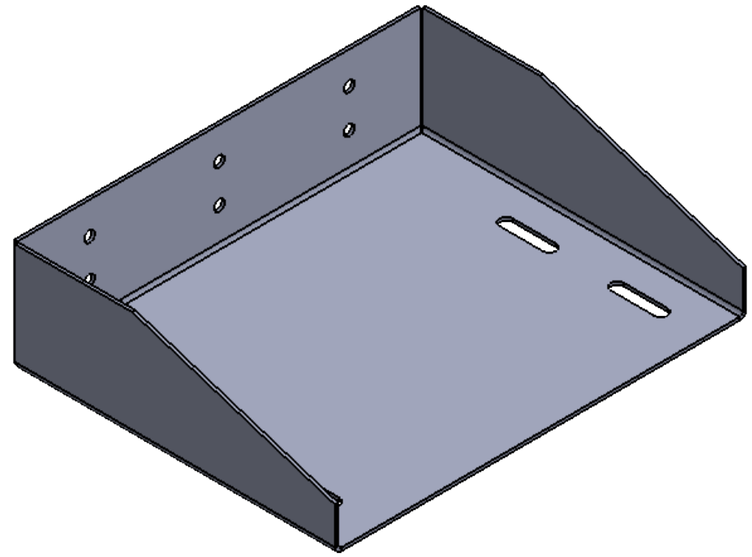


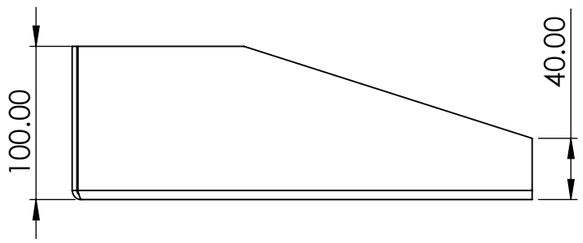



MOTOR MTG BRAKET STD


TITLE - RETRACTABLE ROOF				NIHVA TECHNOLOGIES PVT.LTD.PUNE
DWG NO - NTPL-276-PM-001-05-01-000				Website - www.nihva.com
	NAME	SIGNATURE	DATE	PROJECT NO - NTPL-276-PM
DRAWN	V.W		29-03-2025	PRODUCT - RETRACTABLE ROOF
CHK'D	S.W		29-03-2025	SITE LOCATION - GUJARAT
APPV'D	V.T.		29-03-2025	
if any queries contact - supportautomation@nihva.com				REVISION - QTY - 1
ALL DIMENSION ARE IN mm		A3		SCALE - SHEET 19 OF 21

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	C- CHANEL MTG BASE PLATE	320X50X10MM THK	1
2	C - CHANEL	70X30X575	2
3	C- CHANEL JOINING PLATE	35X40X10MM THK	2
4	2D DRAWING SALAVI MAM BUSBAR MTG PLATE		2

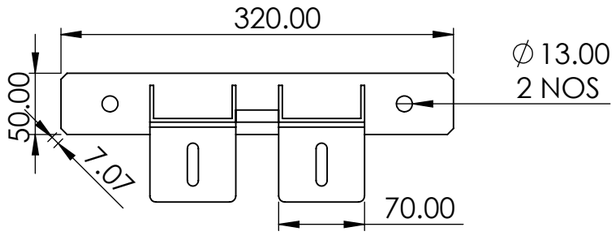

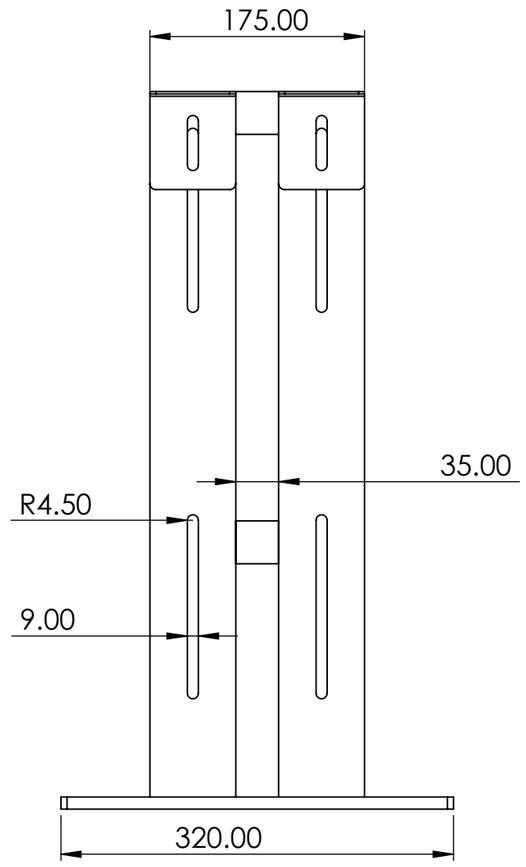


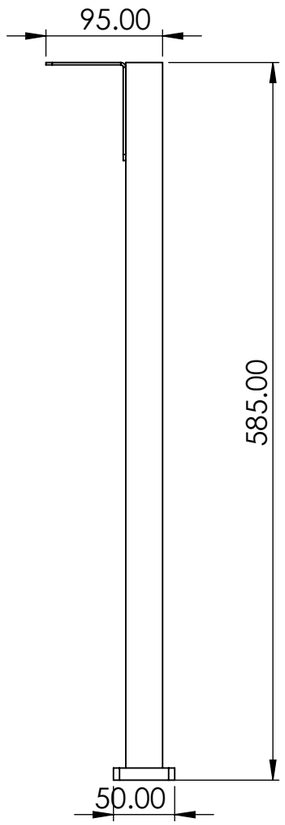


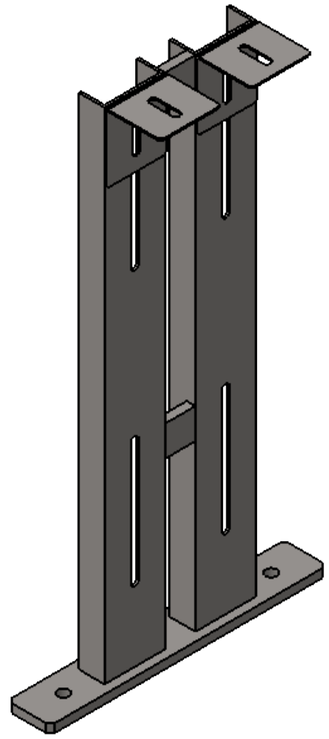


TITLE - RETRACTABLE ROOF				NIHVA TECHNOLOGIES PVT.LTD.PUNE
DWG NO - NTPL-276-PM-001-06-000-08				Website - www.nihva.com
	NAME	SIGNATURE	DATE	PROJECT NO - NTPL-276-PM
DRAWN	V.W		29-03-2025	PRODUCT - RETRACTABLE ROOF
CHK'D	S.W.		29-03-2025	SITE LOCATION - GUJARAT
APPV'D	V.T.		29-03-2025	
if any queries contact - supportautomation@nihva.com				REVISION - / QTY - 1
ALL DIMENSION ARE IN mm		A3		SCALE - / SHEET 20 OF 21

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	2D DRAWING SALAVI MAM BUSBAR FLASHER	STD (LOOSE PART)	1

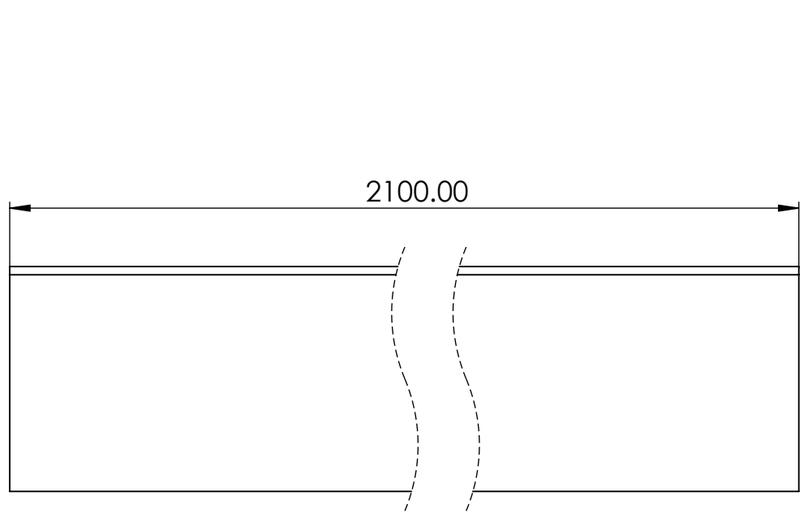

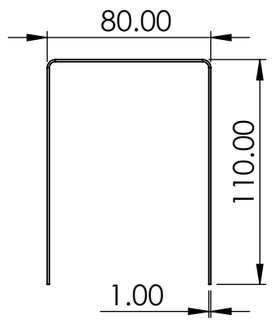

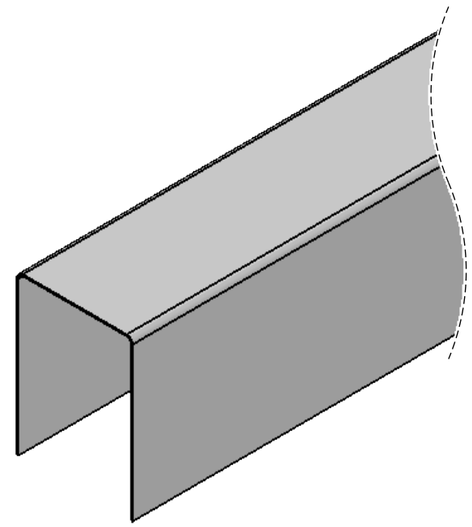

TITLE - RETRACTABLE ROOF				NIHVA TECHNOLOGIES PVT.LTD.PUNE Website - www.nihva.com
DWG NO - NTPL-276-PM-001-07-000-10				
	NAME	SIGNATURE	DATE	PROJECT NO - NTPL-276-PM
DRAWN	V.W.		29-03-2025	PRODUCT - RETRACTABLE ROOF
CHK'D	S.W.		29-03-2025	SITE LOCATION - GUJARAT
APPV'D	V.T.		29-03-2025	
if any queries contact - supportautomation@nihva.com				REVISION - QTY - 1
ALL DIMENSION ARE IN mm		A3		SCALE - SHEET 21 OF 21