

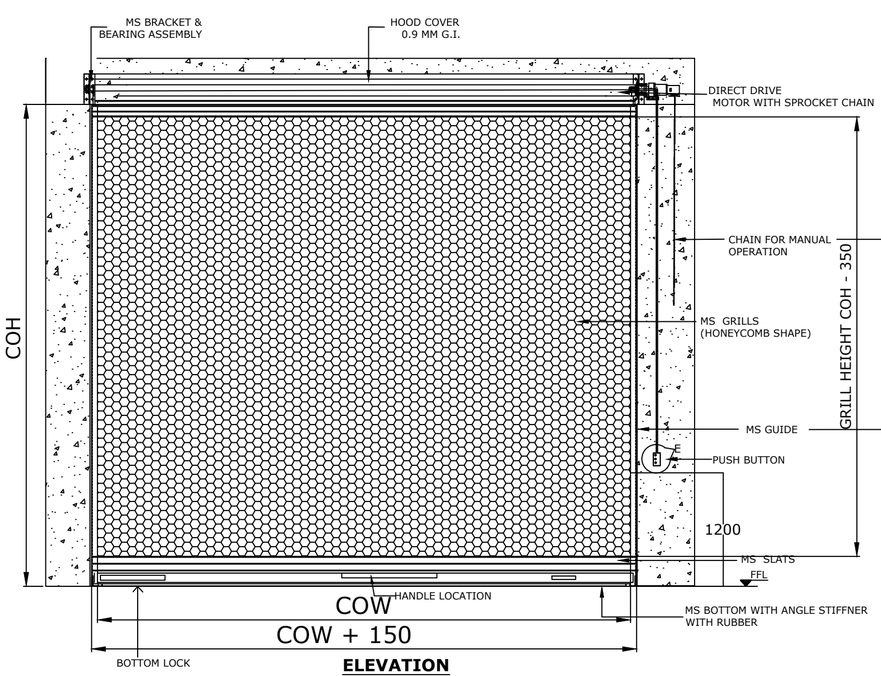




**ELEVATION**

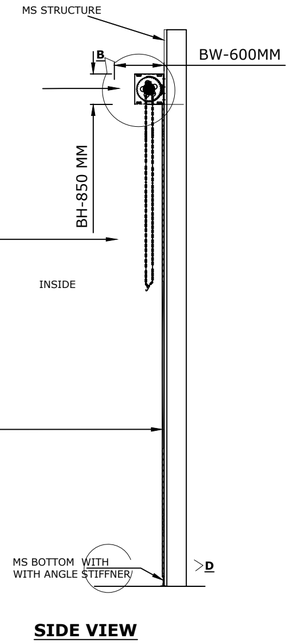


**SIDE VIEW**

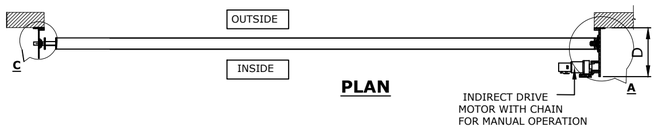


**PLAN**

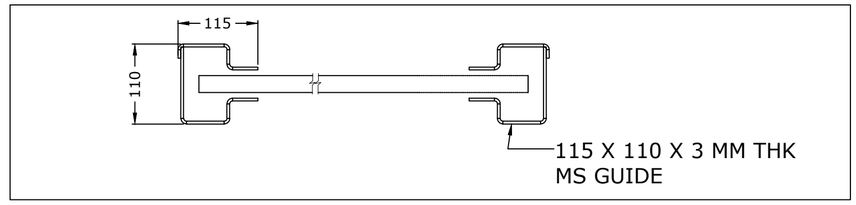



NOTES-
1. MS STRUCTURE & ITS FITTING IS IN CLIENT SCOPE .
2. SPACE OF 550 MM IS REQUIRED ABOVE CLEAR OPENING HEIGHT FOR INSTALLATION OF SHUTTER.
3. CLEAR OPENING HEIGHT AFTER SHUTTER INSTALLATION WILL BE 150 MM LESS THAN WALL OPENING HEIGHT .
4. MANUAL CHAIN IS ONLY USED FOR EMERGENCY OPERATION.
5. PAINT: 1 COAT OF EPOXY POLYAMIDE BASED ENAMEL FINISH OF RAL SHADE RAL 9007 AND 1 COAT OF ZINC PHOSPHATE PRIMER.

TECHNICAL SPECIFICATION:
1. MOTOR- DIRECT DRIVE WITH SPROCKET CHAIN, NICE MAKE, IP54 PROTECTION.
2. ACCESSORIES: ADVANCE ACCESS CONTROL, CARD READER ON BOTH SIDES OF DOOR AND PHOTOCELL.


REVISION- R01
1. FULL LENGTH GRILL ADDED.
2. MENTIONED RAL SHADE.
3. SPECIFIED THE MOUNTING OF ROLLING SHUTTER ON MS STRUCTURE.

**Curve Type**
**MS 1 MM THK SLAT**


**MS BOTTOM RAIL PROFILE 2.5MM**

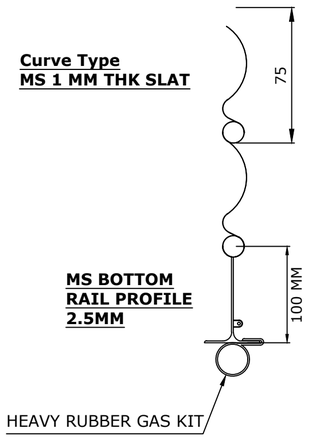


**DETAILS : D**

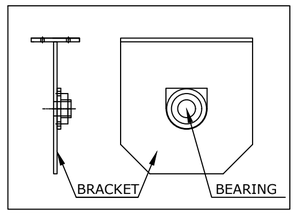


**DETAILS : C**

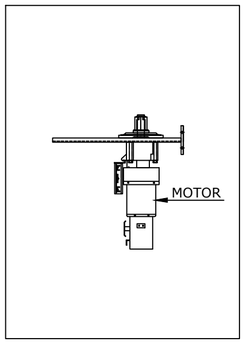


**DETAILS : A & B**

| SR NO | CLEAR OPENING WIDTH (COW) | CLEAR OPENING HEIGHT (COH) | QUANTITY | RAL COLOR FOR PAINTING |
|---|---|---|---|---|
| 1 | 4000 | 4000 | 2 NOS | RAL 9007 |

| RAL CODE | SHADE | COLOUR |
|---|---|---|
| RAL 9007 | GREY | |

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE
MOTORIZED ROLLING SHUTTER WITH GRILL

| | NAME | SIGN | DATE |
|---|---|---|---|
| DRAWN | G.I.P. | | 18.08.2021 |
| CHECK | A.K. | | 18.08.2021 |
| APPRD. | V.T. | | 18.08.2021 |

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT -
PROJECT -
SITE LOCATION -

If any queries contact :design@nihva.com | DWG. NO. : NIHVA/21-22/VDR/0153 | REV- 00
ALL DIMENSION ARE IN mm | SCALE: NTS | WT: | SHEET: