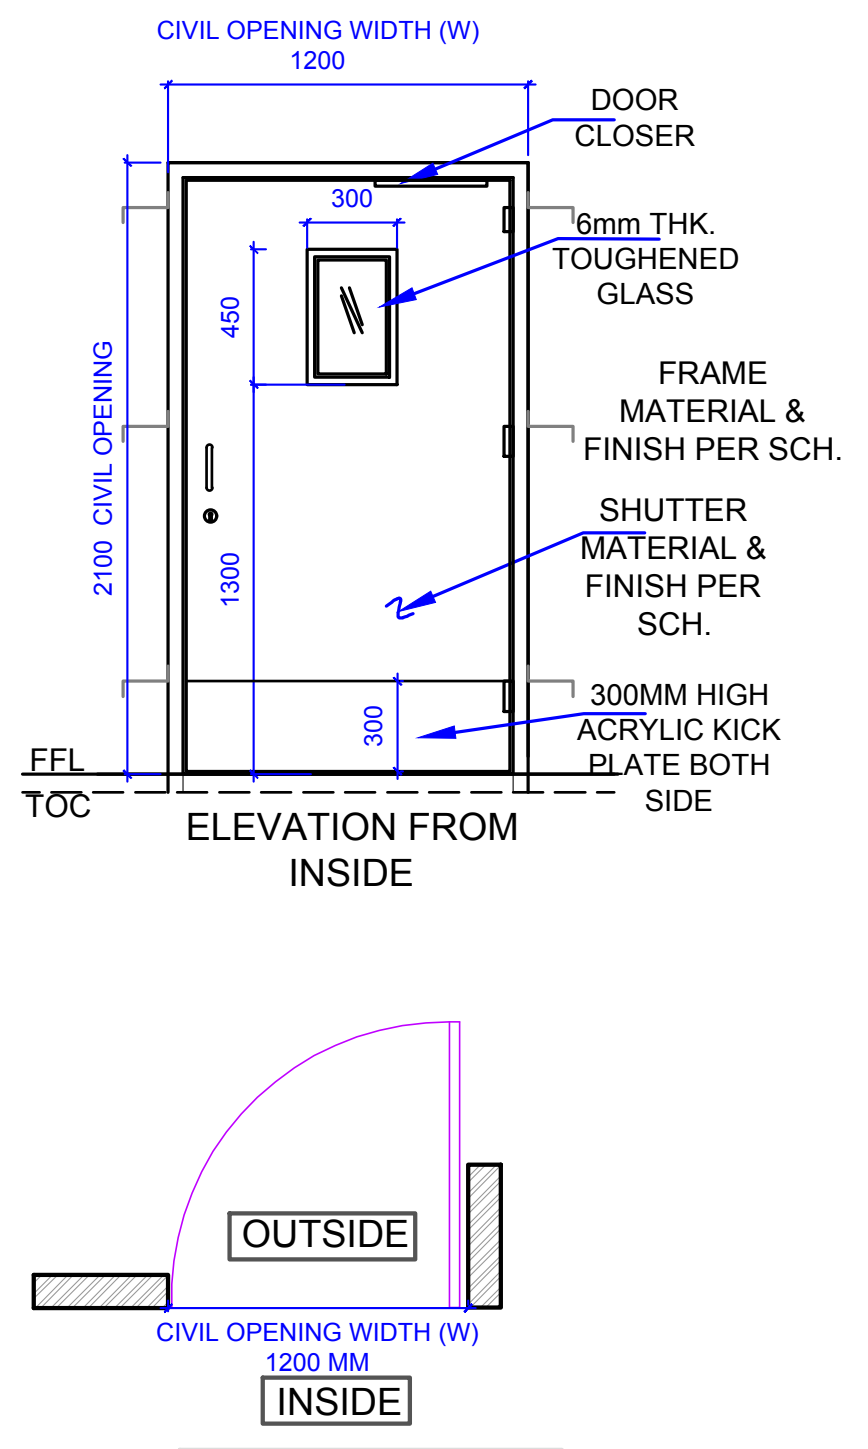

D1: 1200 X 2100

2 HR FIRE RATED HMPS DOOR.

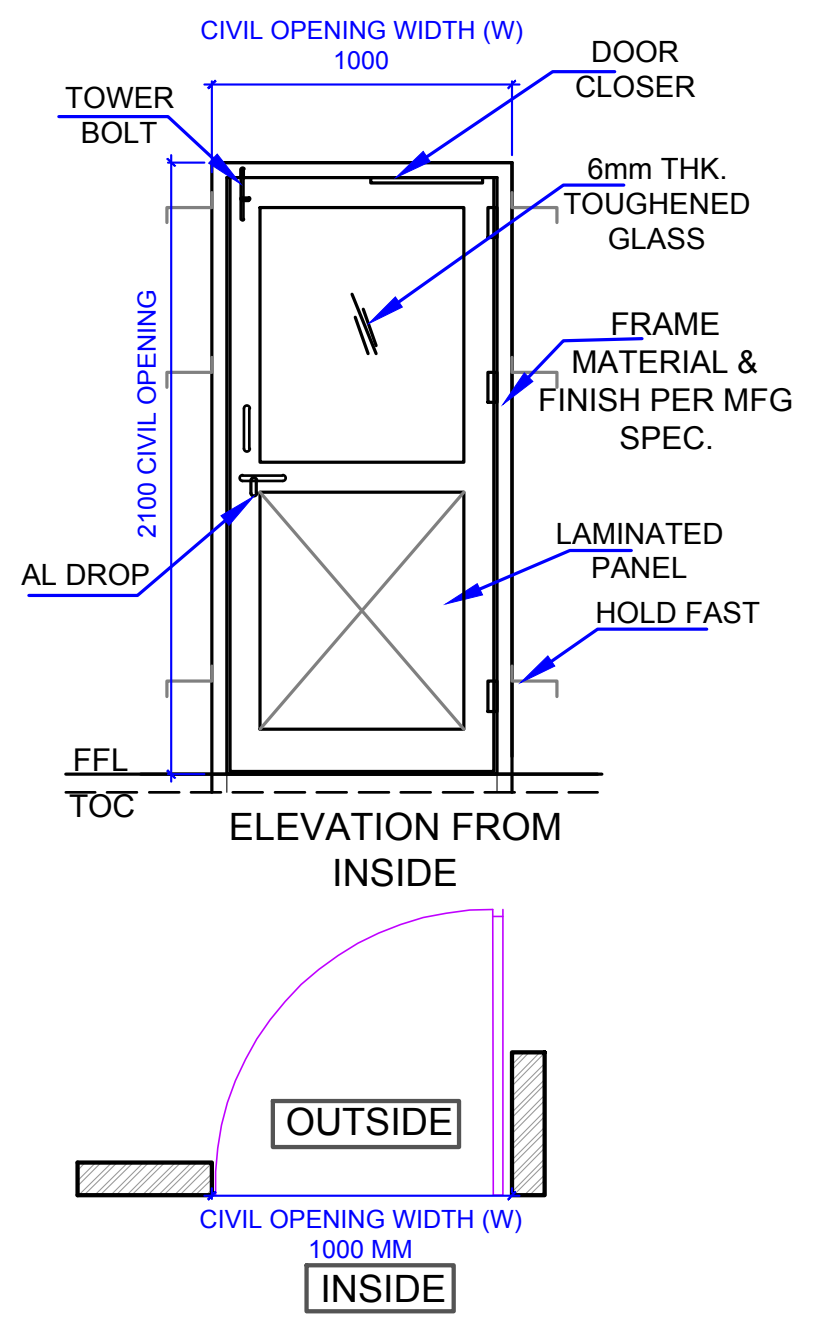

D3: 1000 X 2100

ALUMINIUM POWDER COATED
PARTIALLY GLAZED PARTIALLY LAMINATED
PANELLED DOOR USING TOUGHNED GLASS
VISION PANEL OF 350X350

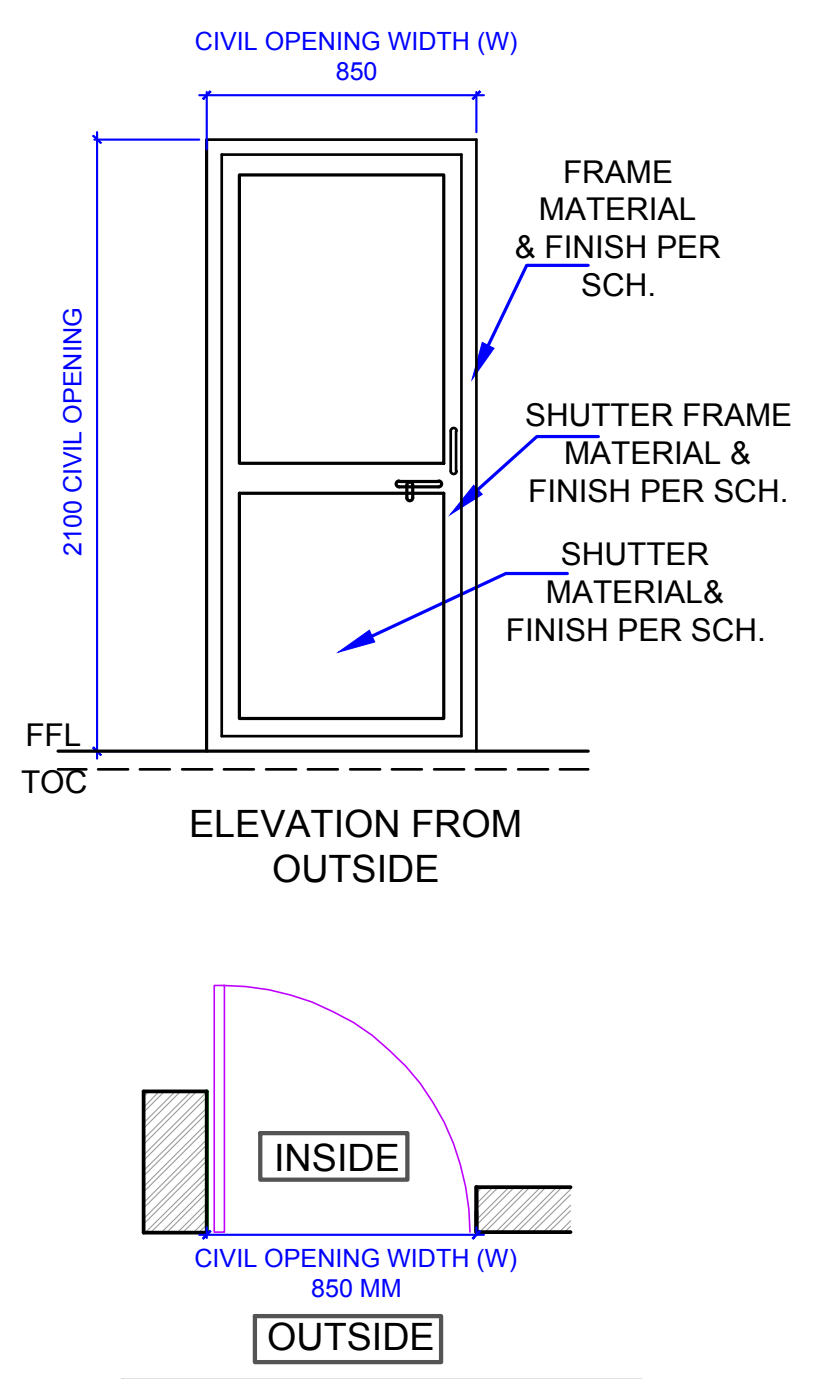

D5: 850 X 2100

LOCATION: TOILET

FRP PANELED DOOR

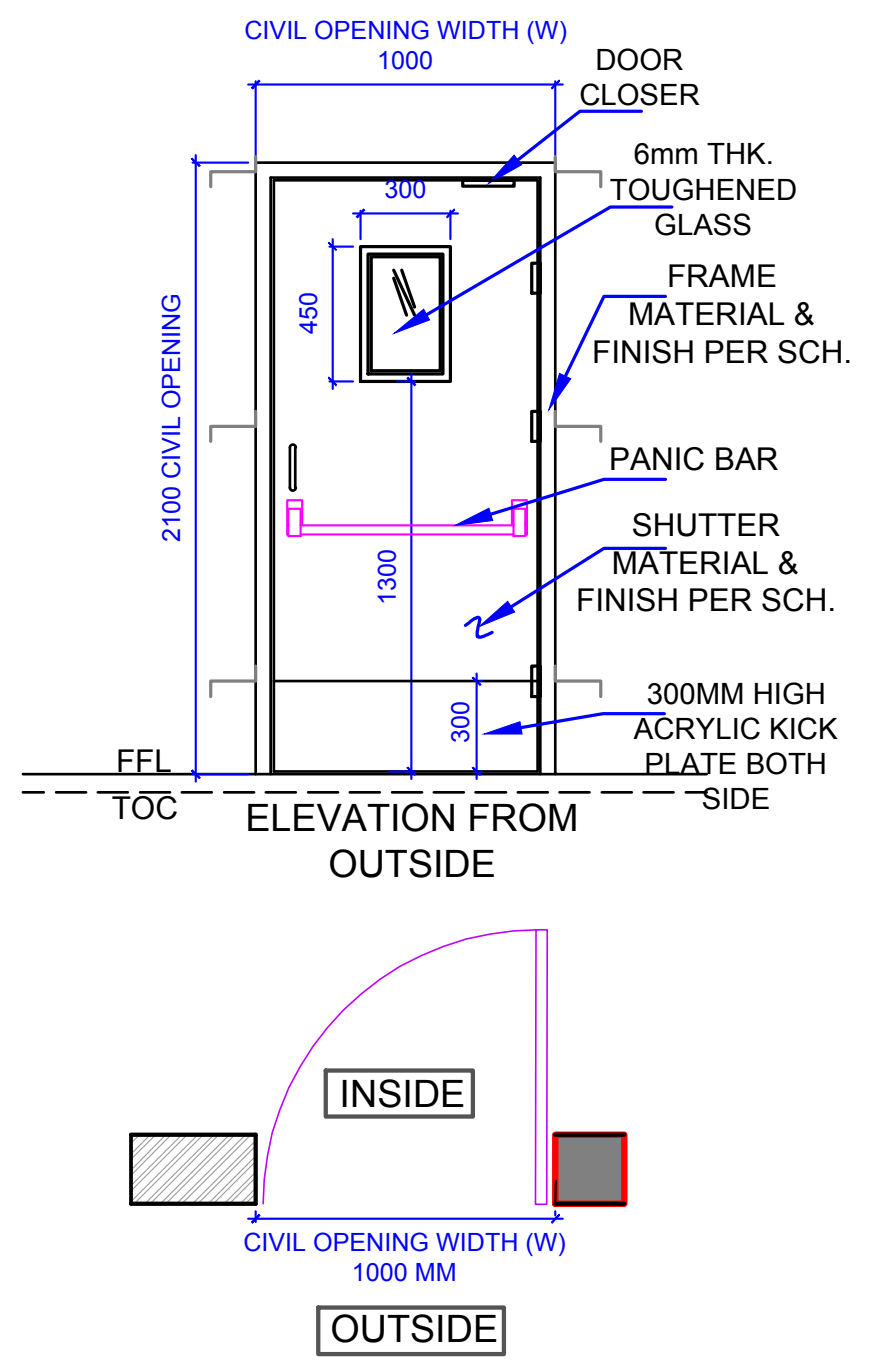

D7: 1000 X 2100

HMPS EMERGENCY EXIT DOOR
USING V.P.

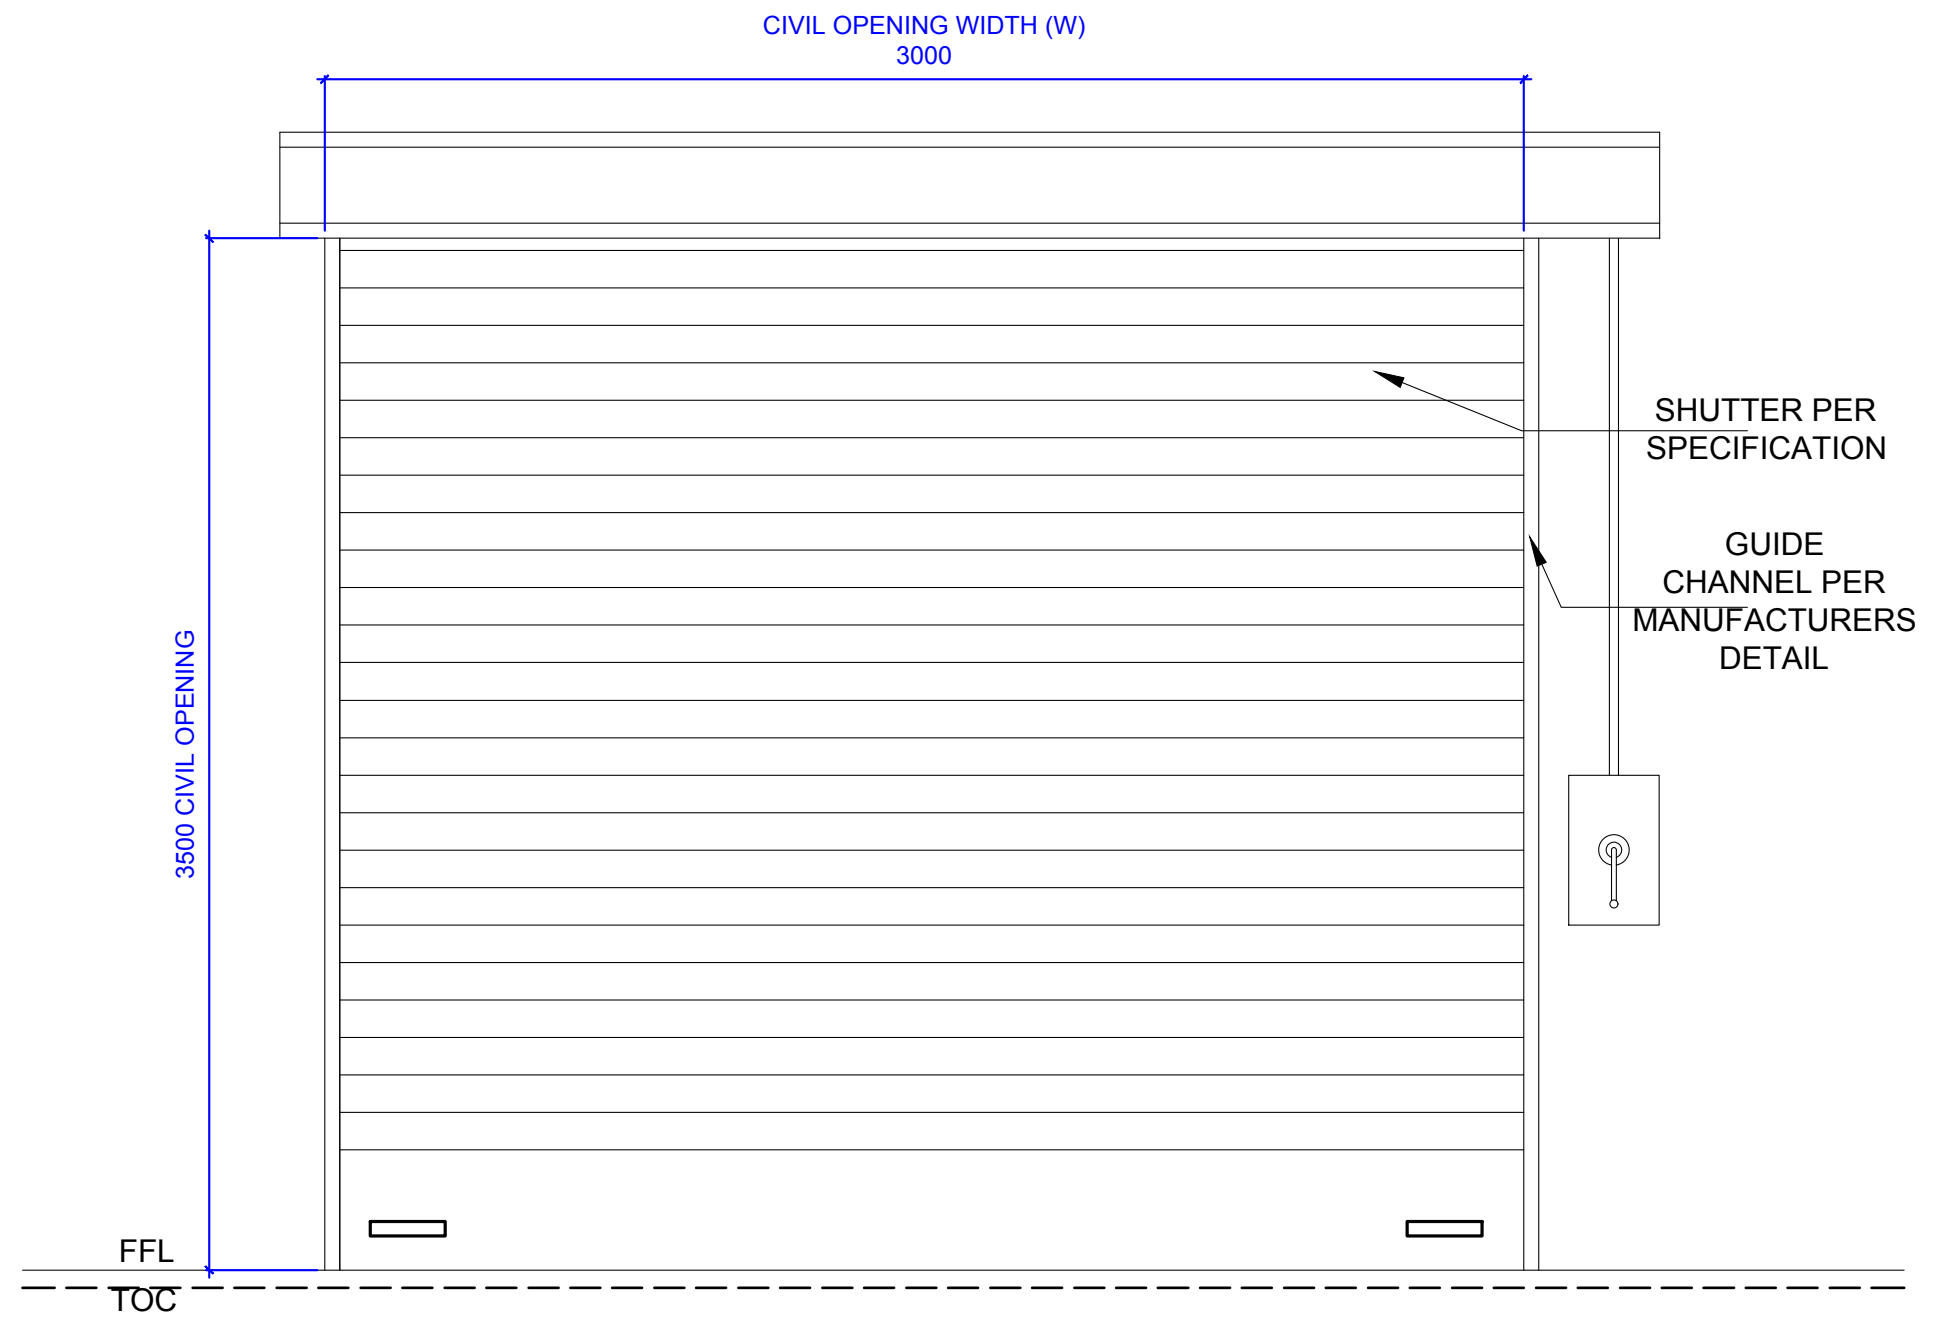
CIVIL OPENING WIDTH (W)
3000
3500 CIVIL OPENING
SHUTTER PER SPECIFICATION
GUIDE CHANNEL PER MANUFACTURERS DETAIL
FFL
TOC

RS: 3000 X 3500

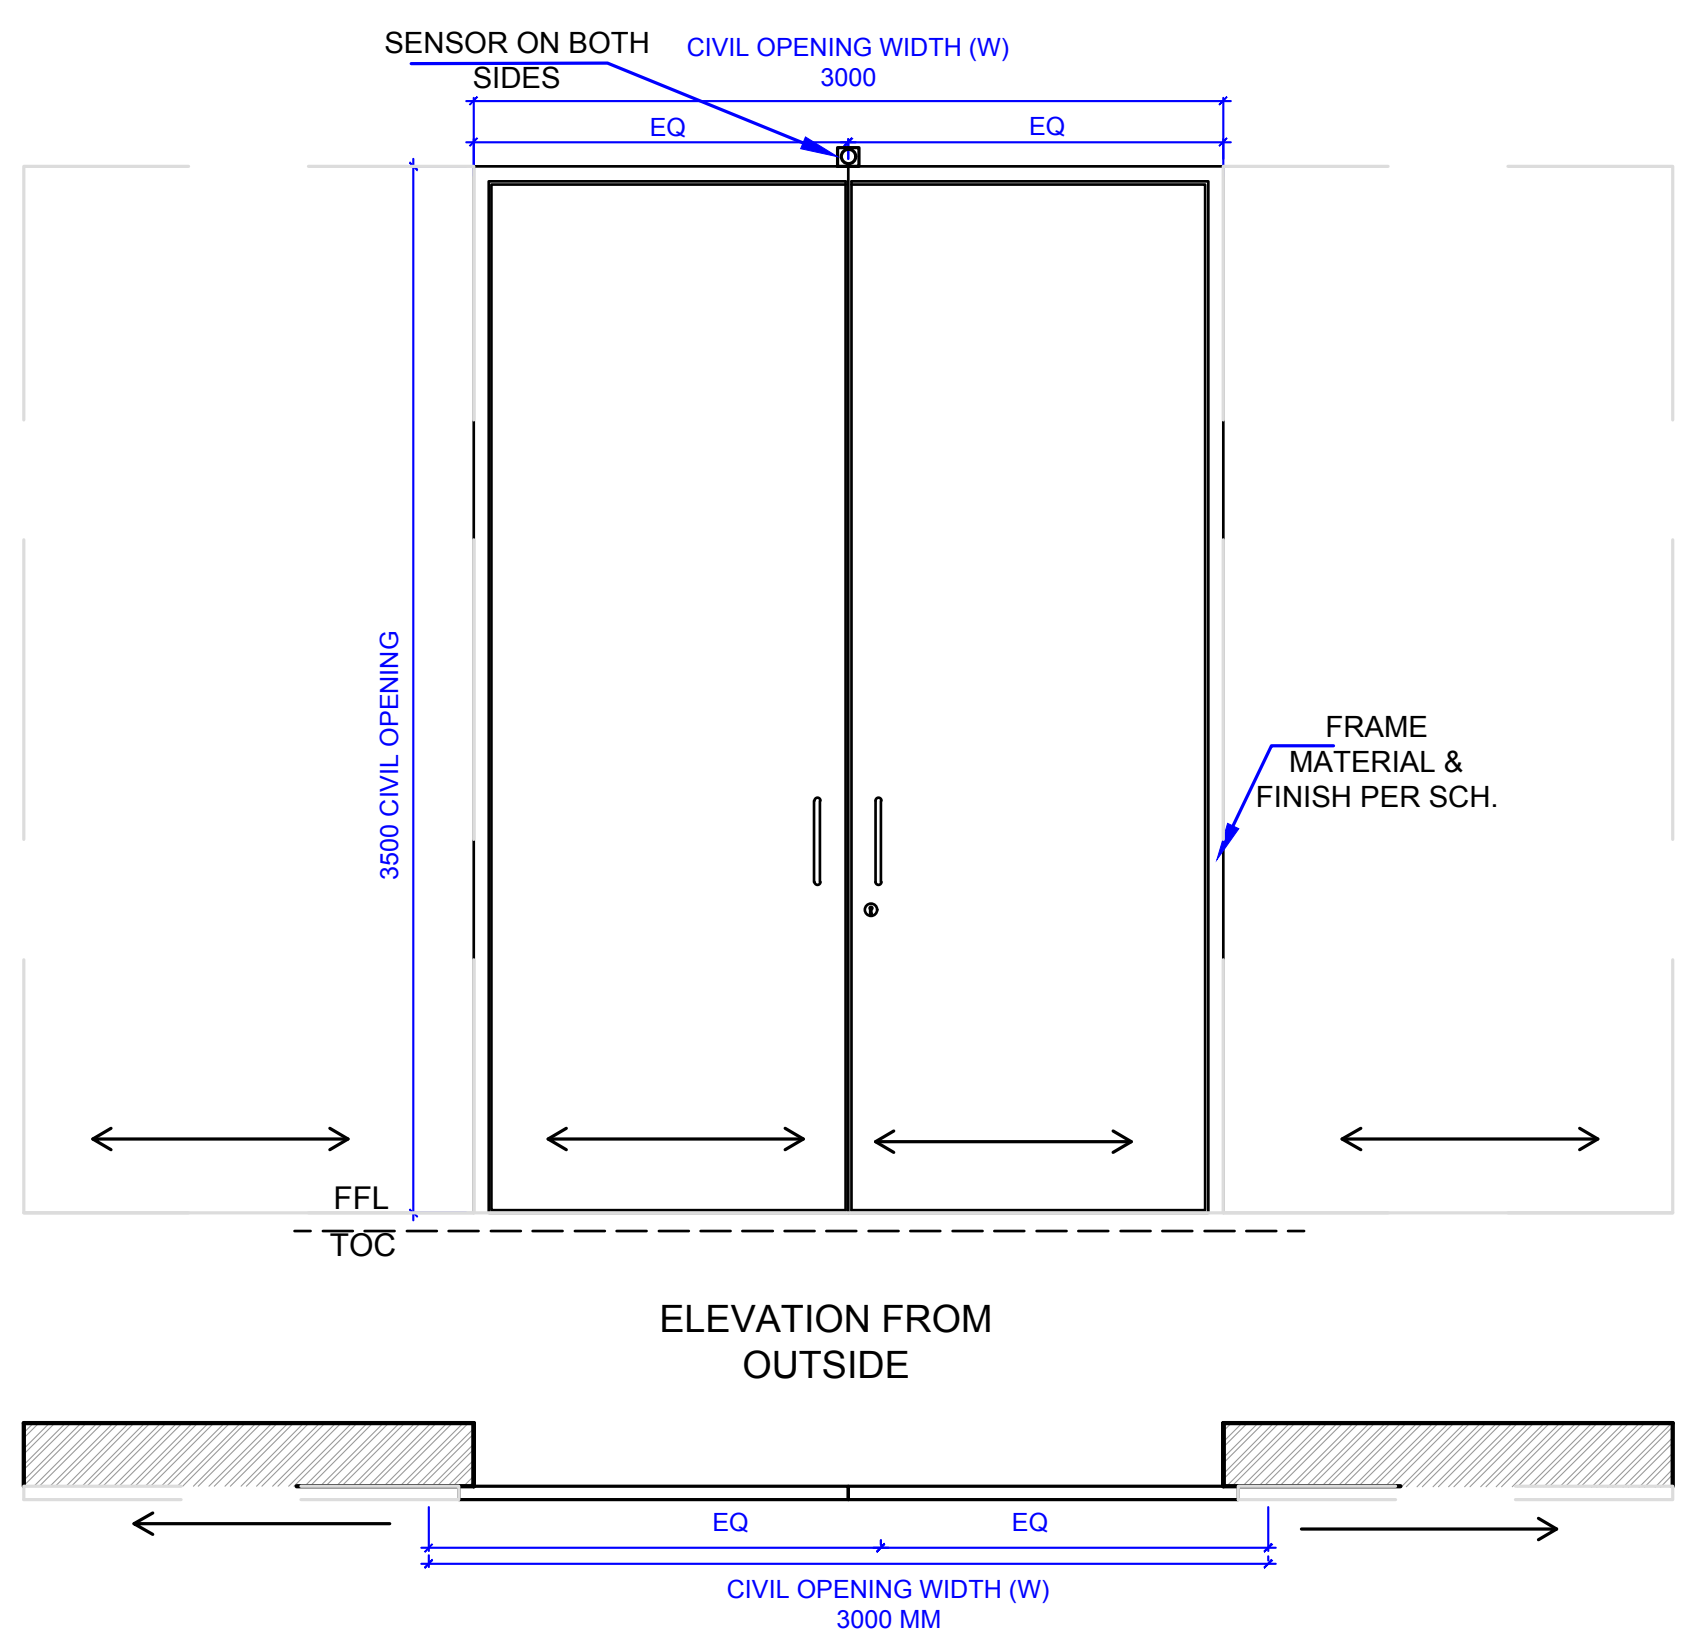

FSD: 3000 X3500

FUSIBLE LINK STEEL SLIDING 2HR FIRE RATED DOOR

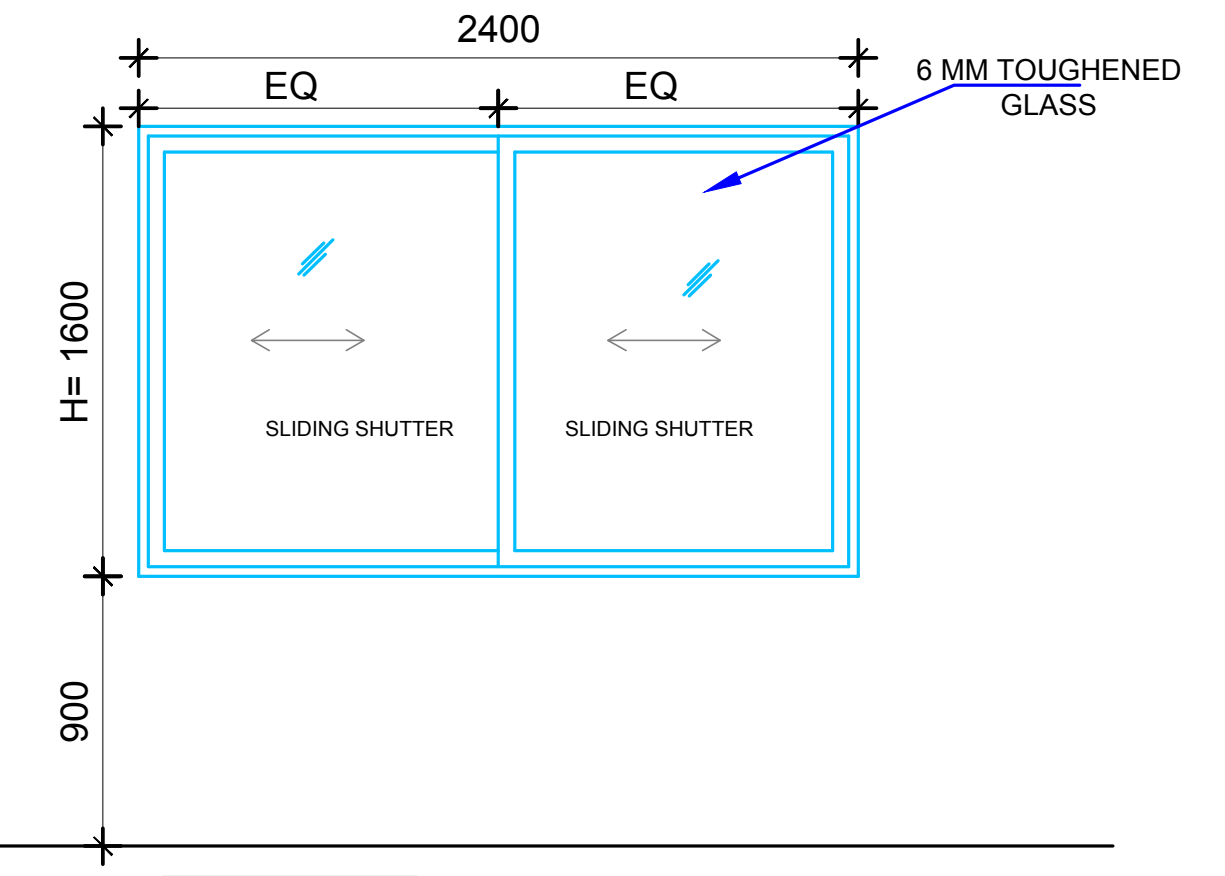

W = 2400X 1600

TYPE: TWO TRACK ALUMINUM SLIDING

2 TRACK ALU. POWDER
COATED SLIDING GLAZED
WINDOW SHUTTERS WITH
6MM TOUGHENED GLASS

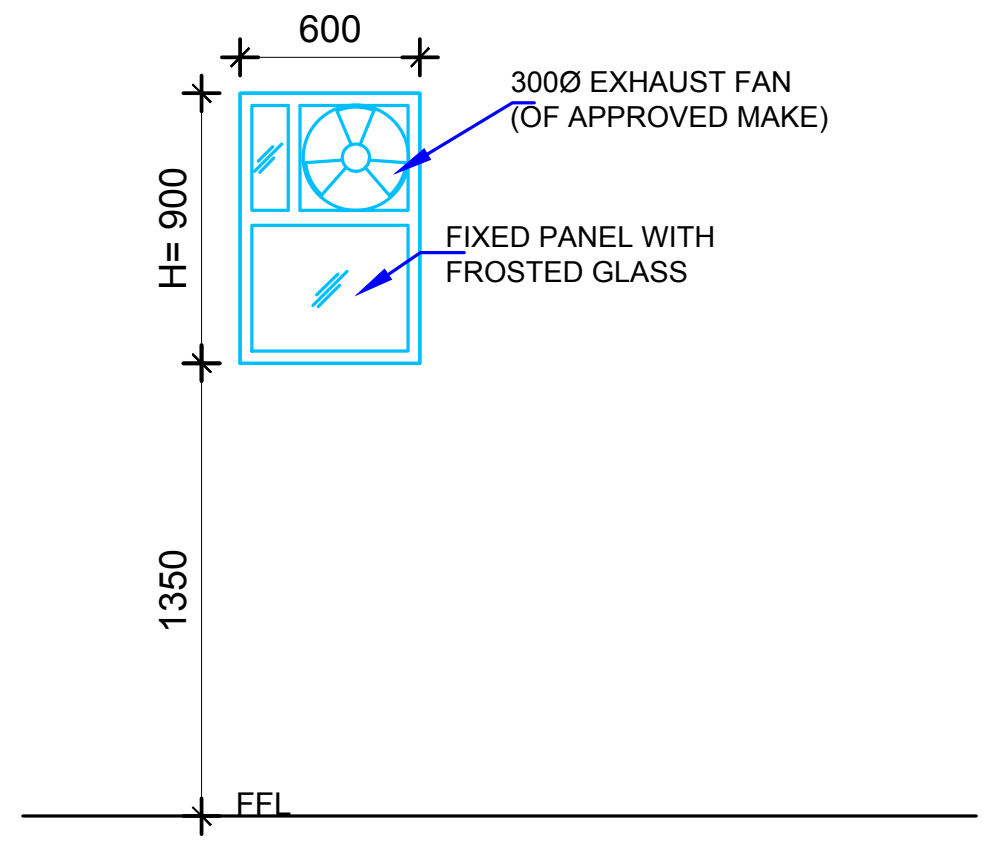
600
300Ø EXHAUST FAN (OF APPROVED MAKE)
FIXED PANEL WITH FROSTED GLASS
H= 900
1350
FFL

V : 600 X 900.

LOCATION: TOILET

DOOR HARDWARE SCHEDULE

SR. NO.	DOOR DESIGNATION	LOCATION (DRAWING NO.)	SHUTTER	MASONRY OPENING WIDTH	MASONRY OPENING HEIGHT	QUANTITY
01	D1	T70180122-06-TD-DR-0022 T70180122-06-TD-DR-0023	SL	1200	2100	2
02	D3		SL	1000	2100	2
03	D5		SL	850	2100	4
04	D7		SL	1200	2100	3
05	RS		RS	3000	3500	3
06	FSD		DL	3000	3500	1

SR. NO.	DOOR DESIGNATION	DOOR FRAME															
		MATERIAL							FINISH								
		CERTIFIED FIRE RATED HARDWOOD	PRESSED STEEL	ALUMINIUM	STEEL	CLEAN ROOM GI PRESSED STEEL	GALVANIZED IRON	APPROVED STONE	SYNTHETIC ENAMEL PAINT	MELAMINE POLISH	FRENCH POLISH	POLYURETHANE PAINT	POLYESTER COATING	COLOUR ANODIZED	POWDER COATED	FIRE RETARDANT PAINT	POLISHED
01	D1	-	●	-	-	-	-	-	-	-	-	●	-	-	-	-	-
02	D3	-	-	●	-	-	-	-	-	-	-	-	-	-	●	-	-
03	D5	-	-	-	-	-	-	●	-	-	-	-	-	-	-	-	-
04	D7	-	●	-	-	-	-	-	-	-	-	●	-	-	-	-	-
05	RS	-	-	-	●	-	-	-	●	-	-	-	-	-	-	-	-
06	FSD	-	-	-	●	-	-	-	-	-	-	●	-	-	-	-	-

SR. NO.	DOOR DESIGNATION	DOOR SHUTTER																
		SHUTTER FRAME						SHUTTER PANELS										
		CERTIFIED FIRE RATED HARDWOOD	PRESSED STEEL	ALUMINIUM	STEEL	GALVANIZED IRON	CLEAN ROOM GI PRESSED STEEL	6/8mm THK. COMMERCIAL PLY OVER WOODEN BATTENS	6/8mm THK. MARINE PLY OVER WOODEN BATTENS	LAMINATED CALCIUM SILICATE BOARD OVER PLYWOOD	PARTLY GLAZED & PARTLY PRE LAMINATED PARTICLE BOARD	PRELAMINATED PANELLED SHUTTER	PRESSED STEEL WITH STIFFENER	ROLL UP SHUTTER WITH STEEL GUIDE CHANNEL	GALVANIZED IRON WITH STIFFENER	STEEL	FULL GLASS PANEL (10MM)	FRP PANEL
01	D1	-	●	-	-	-	-	-	-	-	-	-	●	-	-	-	-	-
02	D3	-	-	●	-	-	-	-	-	-	●	-	-	-	-	-	-	-
03	D5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	●
04	D7	-	●	-	-	-	-	-	-	-	-	-	●	-	-	-	-	-
05	RS	-	-	-	●	-	-	-	-	-	-	-	-	●	-	-	-	-
06	FSD	-	-	-	●	-	-	-	-	-	-	-	-	-	-	●	-	-

SR. NO.	DOOR DESIGNATION	DOOR SHUTTER												GLAZING										
		FINISH												GLAZING TYPE					TYPE OF GLASS					
		SYNTHETIC ENAMEL PAINT	MELAMINE POLISH	FRENCH POLISH	DECORATIVE LAMINATE	PLAIN LAMINATE	POLYURETHANE PAINT	S.S HAIRLINE FINISH	POLYESTER COATING	COLOUR ANODIZED	POWDER COATED	FIRE RETARDANT PAINT	FRP PANEL	VISION PANEL	SINGLE GLAZING	DOUBLE GLAZING	LOUVERS 100 MM WIDE		TOUGHENED 6MM	FLOAT	GROUND/OBSCURED	WIRED	TINTED	5.5mm THK. FROSTED
01	D1	-	-	-	-	-	●	-	-	-	-	-	-	●	●	-	-	-	●	-	-	-	-	-
02	D3	-	-	-	-	-	-	-	-	-	●	-	-	-	●	-	-	-	●	-	-	-	-	-
03	D5	-	-	-	-	-	-	-	-	-	-	-	●	-	-	-	-	-	-	-	-	-	-	-
04	D7	-	-	-	-	-	●	-	-	-	-	-	-	●	●	-	-	-	●	-	-	-	-	-
05	RS	●	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
06	FSD	-	-	-	-	-	●	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

SR. NO.	DOOR DESIGNATION	INSULATION			OTHER FEATURES								HARDWARE PER DOOR		
													LOCKS		
		ROCK WOOL	POLYURETHANE FOAM	HONEY COMB CRAFT PAPER	FIXED VENTILATOR	DEMOUNTABLE TRANSOM PANEL	FIXED TRANSOM PANEL	PRECOATED ALUMINIUM LOUVER	PRECOATED GALVANIZED LOUVER	TIMBER LOUVER	SLIDING GEAR WITH CHANNEL	FROST FILM ABOVE GLASS	MORTICE LOCK WITH LEVER HANDLE	MORTICE LOCK WITH DOOR KNOB SET	DEAD BOLT WITH KEY
01	D1	●	-	-	-	-	-	-	-	-	-	-	-	-	●
02	D3	-	-	-	-	-	-	-	-	-	-	-	-	-	●
03	D5	-	-	-	-	-	-	-	-	-	-	-	-	-	-
04	D7	●	-	-	-	-	-	-	-	-	-	-	-	-	-
05	RS	-	-	-	-	-	-	-	-	-	-	-	AS PER VENDOR DETAIL		
06	FSD	-	-	-	-	-	-	-	-	-	-	-	-	-	

SR. NO.	DOOR DESIGNATION	HARDWARE PER DOOR																	REMARKS
		HINGES				CLOSER		HANDLES				BOLTS		STOPPERS		KICK PLATE			
		BUTT HINGES	PARLIAMENT HINGES	SPRING HINGES	FRICTION HINGES	HYDRAULIC (SURFACE MOUNTED)	FLOOR SPRING/ PIVOT	PUSH/PULL PLATE	'D' SHAPE ROUND SS HANDLE	PANIC BAR	METAL HANDLE	TOWER BOLT	ALDROP	FLOOR / WALL STOPPER (MAGNETIC)	FOOT OPERATED SPRING STOPPER	TRANSPARENT ACRYLIC	ALUMINIUM	SS PLATE	
01	D1	●	-	-	-	●	-	●	●	-		-	-	●	-	●	-	-	1 HR FIRE RATED DOOR
02	D3	●	-	-	-	●	-	●	-	-		-	-	●	-	-	-	-	
03	D5	●	-	-	-	-	-	-	-	-	●	●	●	-	-	-	-	-	FRP PANELED DOOR
04	D7	●	-	-	-	●	-	●	●	●		-	-	-	-	●	-	-	
05	RS																		GEAR OPERATED
06	FSD		-	-	-		-		-	-		-	-		-		-	-	2 HR FIRE RATED FUSIBLE LINK SLIDING DOOR

WINDOW HARDWARE SCHEDULE

SR. No.	WINDOW DESIGNATION	LOCATION (DRAWING NO.)	MASONRY OPENING WIDTH	MASONRY OPENING HEIGHT	QUANTITY
SECURITY CABIN 1 & 2 / METERING KIOSK / PUMP ROOM					
01	W	T70180129-06-TD-DR-0001	2400	1500	37
02	V		600	900	4

SR. No.	WINDOW DESIGNATION	WINDOW FRAME																			
		TYPE									MATERIAL					FINISH					
		OPENABLE SIDE HUNG	OPENABLE TOP HUNG	SLIDING	FIXED PANELLED	PARTLY FIXED PARTLY OPENABLE	FIXED LOUVERD	ADJUSTABLE LOUVERS	PARTLY FIXED, PARTLY SLIDING	PARTLY FIXED, PARTLY TOP HUNG	PRESSED STEEL	ALUMINIUM	STEEL	CERTIFIED FIRERATED HARDWOOD	PVC	SYNTHETIC ENAMEL PAINT	POLYURETHANE PAINT	COLOURED ANODISED	POWDER COATED	MELAMINE POLISH	FRENCH POLISH
01	W	-	-	●	-	-	-	-	-	-	-	●	-	-	-	-	-	-	●	-	-
02	V	-	-	-	●	-	-	-	-	-	-	●	-	-	-	-	-	-	●	-	-

SR. No.	WINDOW DESIGNATION	WINDOW SHUTTER																
		SHUTTER FRAME					SHUTTER PANELS						FINISH					
		PRESSED STEEL	ALUMINIUM	STEEL	CERTIFIED FIRERATED HARDWOOD	PVC	ROLLED STEEL	PARTLY GLAZED & PARTLY PRE LAMINATED PARTICLE BOARD	PRECOATED ADJUSTABLE LOUVER	POWDER COATED FIXED LOUVERS	GLAZED PANEL	OPAQUE GLAZED LOUVERS	SYNTHETIC ENAMEL PAINT	POLYURETHANE PAINT	COLOUR ANODIZED	POWDER COATED	MELAMINE POLISH	FRENCH POLISH
01	W	-	●	-	-	-	-	-	-	-	●		-	-	-	●	-	-
02	V	-	●	-	-	-	-	-	-	-	●		-	-	-	●	-	-

SR. No.	WINDOW DESIGNATION	GLAZING								OTHER FEATURES					HARDWARE PER WINDOW														REMARKS
		GLAZING TYPE			TYPE OF GLASS										HINGES					HANDLES			BOLTS		STOPPERS			LOCK	
		SINGLE GLAZING	DOUBLE GLAZING	GLASS LOUVERS	TOUGHENED CLEAR GLASS	FLOAT GLASS	WIRED GLASS	TINTED	FROSTED GLASS	PRECOATED ADJUSTABLE LOUVERS	PRECOATED FIXED LOUVERS	TIMBER LOUVERS	PVC FILLER	WIRE MESH	BUTT HINGES	PARLIAMENT HINGES	FRICTION HINGES	SPRING HINGES	AUTO HINGES	LEVER WITH LOCK	PULL/PUSH	'D' SHAPE HANDLE	TOWER BOLT	STOPPER	PEG STAY WITH 3 HOLES	SPRING CATCH	HOOK AND EYE STAY	SLIDING WINDOW LOCK	
01	W	●	-	-	●	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	●	WITH 6MM TOUGHENED GLASS
02	V	●	-	-	-	-	-	-	●	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	FIXED GLAZED WINDOW WITH EXHAUST FAN.

NORTH

NOTES :-

DOORS:

01 ALL DIMENSIONS ARE IN mm.
02 THUS (●) INDICATES THE PROVISION OF PARTICULAR FIXTURE OR HARDWARE.
03 THE VISION PANEL GLAZING & FULL GLAZING FOR THE ALL DOORS SHALL BE AS PER SCHEDULE
04 NEOPRENE GASKET SHALL BE USED ALONG WITH ALUMINIUM/PRESSED STEEL BEADING & ALSO BETWEEN SHUTTER & DOOR FRAME, ASTRAGAL TO AVOID AIR LEAKAGE OR WATER ENTRY.
05 BOTTOM CLEARANCE FOR SHUTTERS SHALL BE 3mm TO 5mm FOR ALL DOORS.
06 PROTECTIVE COATINGS OF PAPER TAPES TO BE PROVIDED TO EXPOSED HMPS/ALUMINIUM SECTIONS SHUTTERS & FRAME TO AVOID SCRATCHES & DAMAGE DURING TRANSPORT & ERECTION PROCESS.
07 CONTRACTOR SHALL SUBMIT THE SAMPLE OF GLAZING & ALL OTHER HARDWARE FIXTURES FOR APPROVAL OF CLIENT/ENGINEER.
08 INSERTS & FIXTURES IF ANY SHALL BE PLACED IN POSITION BEFORE FINISHING WORKS.
09 A SAMPLE OF DOOR TO BE ERECTED AT SITE FOR APPROVAL BY SITE IN CHARGE/ CLIENT/CONSULTANT.
10 ALL ROLLING SHUTTERS SHOULD BE PAINTED WITH 2 COATS OF ANTI CORROSIVE PAINTS/PRIMER PRIOR TO FINAL COAT OF PAINT UNO
11 FOR DOUBLE LEAF DOORS, DOOR CLOSER SHALL BE FIXED ON ACTIVE LEAF.
12 ALL HARDWARE & FIXTURES FOR DOORS SHALL BE OF APPROVED QUALITY AND TO BE APPROVED BY ENGINEER/ CLIENT.
13 ALL DIMENSIONS OF MASONRY OPENING SHOULD BE CHECKED AT SITE PRIOR TO MASS FABRICATION OF DOORS AND WINDOWS.
14 INCASE OF PROVISION OF DOORS MORE THAN 1200mm IN WIDTH, ADDITIONAL STEEL/ G.I STUD TO BE PROVIDED WITHIN GYPSUM CLEAN ROOM PARTITION (UNO).
15 PANIC BAR FOR EMERGENCY EXIT DOOR TO BE PROVIDED AT SITE AS DIRECTED.IN CASE OF DOUBLE LEAF DOOR PANIC BAR TO BE PROVIDED ON ACTIVE LEAF
16 ROLLING SHUTTERS SHALL BE APPLICABLE AS BELOW PER IS:6248-1979
PUSH PULL TYPE -
UPTO 8.00 SQ. MTR WITHOUT BALL BEARING
8.00 TO 12.00 SQ WITH BALL BEARING . MTR
GEAR OPERATED - 12.00 TO 25.00 SQ. MTR WITH BEVEL GEAR BOX & CRANK HANDLE
25.00 TO 35.00 SQ. MTR WITH HAND CHAIN & CHAIN WHEEL
ELECTRICALLY OPERATED - 35.00 TO 50.00 SQ. MTR. (MAXIMUM)
17 PROJECT SPECIFIC SIZES MAY BE DEFINED WITH SUBSEQUENT NUMBERS
18 IN PRESSURIZED AREAS PLAIN ROLLING SHUTTERS SHALL BE PROVIDED WITH GRILL (NO PROVISION OF GRILL)

WINDOWS:

01 ALL DIMENSIONS ARE IN mm.
02 THUS (●) INDICATES THE PROVISION OF PARTICULAR FIXTURE OR HARDWARE.
03 ALL ALUMINIUM SECTIONS TO BE EXTRUDED FROM HIGH GRADE HE9-WP OF JINDAL MAKE OR EQUIVALENT HAVING THK. NOT LESS THAN 2.2 mm.
04 ALUMINIUM VERTICAL & HORIZONTAL SECTIONS OF THE SHUTTERS TO BE HOLLOW SECTIONS HAVING PROVISION FOR SNAP-ON BEADING FOR FIXING OF GLAZING, VERTICAL SECTIONS TO HAVE IN BUILT GROOVES FOR WEATHER STRIPPING. GLAZING SHALL BE DONE WITH SCRAWLS SNAP
ON TYPE TAPERED BEADING PROVIDED WITH NEOPRENE GASKET.
05 NEOPRENE GASKET TO BE USED ALONG WITH ALUMINIUM BEADING & ALSO BETWEEN SHUTTER & OTHER FRAME TO AVOID AIR LEAKAGE OR WATER ENTRY.
06 PROTECTIVE COATINGS OF PAPER TAPES TO BE PROVIDED TO EXPOSED ALUMINIUM/ PRESSED STEEL/ PVC SECTIONS TO AVOID SCRATCHES & DAMAGE DURING TRANSPORT & ERECTION PROCESS
07 CONTRACTOR SHALL SUBMIT THE SAMPLE OF GLAZING & ALL OTHER HARDWARE FIXTURES FOR APPROVAL OF CLIENT/ ENGINEER.
08 INSERTS & FIXTURES IF ANY SHALL BE PLACED IN POSITION BEFORE FINISHING WORKS. A SAMPLE OF DOOR TO BE ERECTED AT SITE FOR APPROVAL BY CLIENT/ ENGINEER
09 ALL HARDWARES & FIXTURES FOR DOORS SHALL BE OF APPROVED QUALITY AND TO BE APPROVED BY ENGINEER/ CLIENT.
10 ALL DIMENSIONS OF MASONRY OPENING SHOULD BE CHECKED AT SITE PRIOR TO MASS FABRICATION OF DOORS
11 WIRED GLASS TO CONFIRM WITH IS 1909-2000
12 PROJECT SPECIFIC SIZES MAY BE DEFINED WITH SUBSEQUENT NUMBERS

REV.	DESCRIPTION	DRAWN	PREP BY	CHKD	APPR. BY	DATE
0	ISSUED FOR APPROVAL	PAB	PAB	PDM	VHR	26.03.19

This drawing and /or it's contents, information and concepts of design are the exclusive property of ASK Chemicals India Pvt Ltd and prepared by TRIPLAN India Pvt. Ltd. Contents of this drawing shall not be reproduced in any manner, copied or modified in part or in whole to any other firm or individual for any other project except by written agreement with ASK Chemicals India Pvt Ltd.

CLIENT :
ASK CHEMICALS INDIA PVT LTD
MIDC, Kurkumbh
Tal: Daund, Dist: Pune- 412 219
Maharashtra, India
www.ask-chemicals.com

PROJECT :
ASK FOUNDRY PRODUCTS

CONSULTANT :
TRIPLAN India Pvt Ltd,
Tel : +91 020 67080300
Website : www.triplan.in

DRAWING TITLE :
DOOR & WINDOW
HARDWARE SCHEDULE.

DRAWN BY	PAB	PROJECT NO. T70180122
PREPARED BY	PAB	
CHECKED BY	PDM	DATE : 26.03.2019
APPROVED BY	VHR	SCALE : 1:100

SHEET SIZE: A 1

DRAWING NO. : T70180122-06-TD-DR-0035

REV. 0