


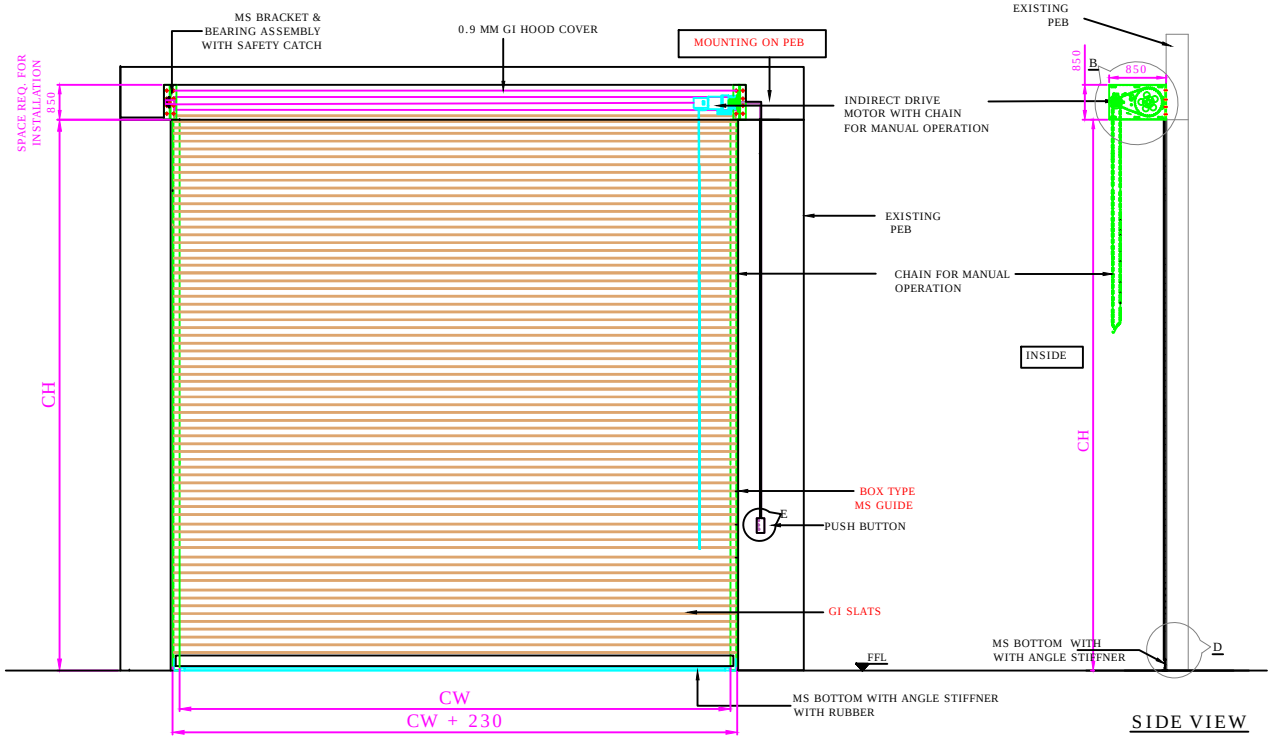


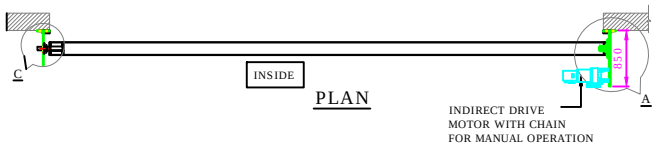


PLAN

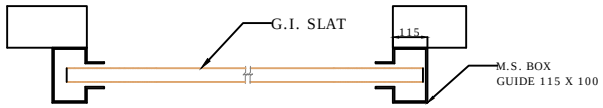


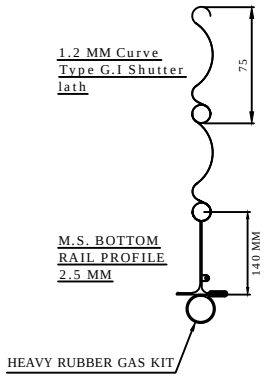


DETAILS : D

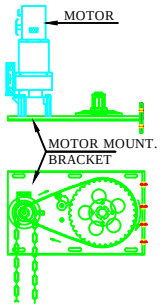

DETAILS : A & B

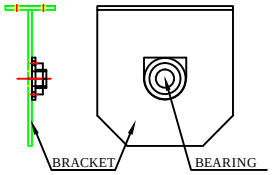

DETAILS : C



DETAILS : E

RAL CODE	SHADE	COLOUR
RAL 9001	CREAM	
RAL 9002	GREY WHITE	
RAL 9010	PURE WHITE	
RAL 5002	ULTRAMARINE BLUE	
RAL 7035	LIGHT GREY	
RAL 7001	SILVER GREY	

REV NO	DATE	DRAWN	REMARK
R01	8.12.2020	S.M.S.	(1) CW & CH CHANGED (2) MOUNTING ON EXISTING STRUCTURE

SR NO	CLEAR WIDTH(CW)	CLEAR HEIGHT(CH)	QTY	LOCATION	RAL CODE	MOTOR POSITION (LH/RH FROM INSIDE)
6	6000	5850	1	A-GRADE SHUTTER		
5	6000	5850	1	G-GRADE SHUTTER		
4	6070	7700	1	F-19		
3	6070	7700	1	B-19		
2	6070	7700	1	F-1		
1	6070	7700	1	B-1		

NOTES-
(1) KINDLY REFER PROVIDED STANDARD RAL SHADE TABLE & PROVIDE CONFIRMATION OF RAL CODE FOR POWDER COATING.
(2) MS STRUCTURE , FITTING & ALL CIVIL WORK IS IN CLIENT SCOPE.
(3) SHUTTER WILL BE ONLY INSTALLED AFTER READINESS OF STRUCTURE AS PER DRAWING PROVIDED.
(4) SPACE OF 850 mm ABOVE CLEAR HEIGHT IS REQUIRED FOR INSTALLATION OF MOTORIZED ROLLING SHUTTER .
(5) MOTOR MOUNTING LOCATION SEEN FROM INSIDE TO BE CONFIRMED BY CLIENT.

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE- GI SLAT MOTORIZED ROLLING SHUTTER

	NAME	SIGN	DATE
DRAWN	SIDDHESHWAR		28.11.2020
CHECK			
APPRD.			

If any queries contact : projectsupport@nihva.com

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - GS PEB & CIVIL WORKS PVT LTD
PROJECT - SANY HEAVY INDUSTRY INDIA PVT LTD
SITE LOCATION - PUNE
DWG. NO. : NIHVA/20-21/0069/R01 REV- R01
SCALE: NTS WT: SHEET: