NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

Proconvis Consultants Pvt Ltd
B3, Kunal River side, Chinchwad
Pune - 411044

Date : 05.08.2020
Quote NO : SQT.20.21.0035
Kind Attn : Mr Laxman Patil
Email Id : laxman.patil@proconvis.com
Contact No: 8669091960

Project Name & Location:

Subject : Quotation for Dock Leveller.

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.
This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2
C.	General Conditions	3
D.	Terms & Condtions	3

A) Commercial Offer


Sr No	Description	Size		Qty	Supply Charges in INR		Installation Charges in INR	
		Clear Width (mm)	Clear Length (mm)	(Nos)	Unit Price	Total Amount	Unit Price	Total Amount
A	**NIHVA Make Dock Leveller Capacity 9 Ton**	2000	2500	1	2,25,000	2,25,000	20,000	20,000
				Total		**2,25,000**		**20,000**
B	P&F Charges			3%		**6,750**		
	Total Without Taxes					**2,31,750**		**20,000**
	GST Extra @ 18%			18%		**41,715**		3,600
	Total With Taxes					**2,73,465**		**23,600**
C	Transportation Charges					**Extra at Actual**		
D	Unloading Charges @ Site					**In Client Scope**		


NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

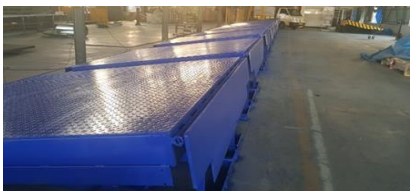

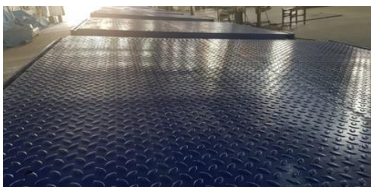

Description	Specifications
Capacity	9 Ton
Dock operation mode	AC power pack hydraulically operated
Lip operation mode	Hydraulic
Operation control	Through panel
Loading platform height from road	1250mm
Travel above & below dock level	(+) 300 / (-) 250 mm
Platform Size (W x L)	2000 mm x 2500 mm
Lip size (W x L)	2000 x 400 mm
Shut Height	480 mm
Overall length	2000 mm x 2500mm + Lip Length (400mm)
Maximum slope can be achieved	10%
Clear Pit dimensions (W x L x D)	(W) 2040mm x (L) 2500 mm x (D)485 mm
Hydraulic power pack	Standard
Driver type	Direct by electric Motor
Motor Ratings	1 H.P
Pump design flow	2.5 LPM
Pump pressure	120 bar Operating 200 bar Max.
Safety valve set pressure	120 Kg/cm²
Pump Type	Gear
Volume of oil receiver	7 Lit
No Of Deck cylinder	2 No
Lip Cylinder	1 No
Dock Bumper	Pair of Dock Bumper

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

Note: Please find below List which are in Client Scope

Sr. No	Description	Remark
1	Secured and fully covered Store area to keep the material	In Client Scope
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site	In Client Scope
3	Electrical Supply on the site single phase/three phase points at different places.	In Client Scope
4	Any civil / masonry/structural work required	In Client Scope
5	All structure support required	In Client Scope
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.	In Client Scope
7	Conduits, Cables required	In Client Scope

D) Terms & Conditions

Price Ex Works Pune

Delivery : 5 - 6 weeks from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

Payment : 80% Advance along with Confirmed Purchase Order & Balance before dispatch.

Validity : Validity of Offer is 15 days from the date of quotation

Warranty : 12 months from the date of supply.

For any further Clarification /Information in this Concern, Please feel free to Contact **Mr. Ravindra Kharat on 7410169333.**

With Best Regards
Varsha
8551091333
For NIHVA Technologies Pvt Ltd