

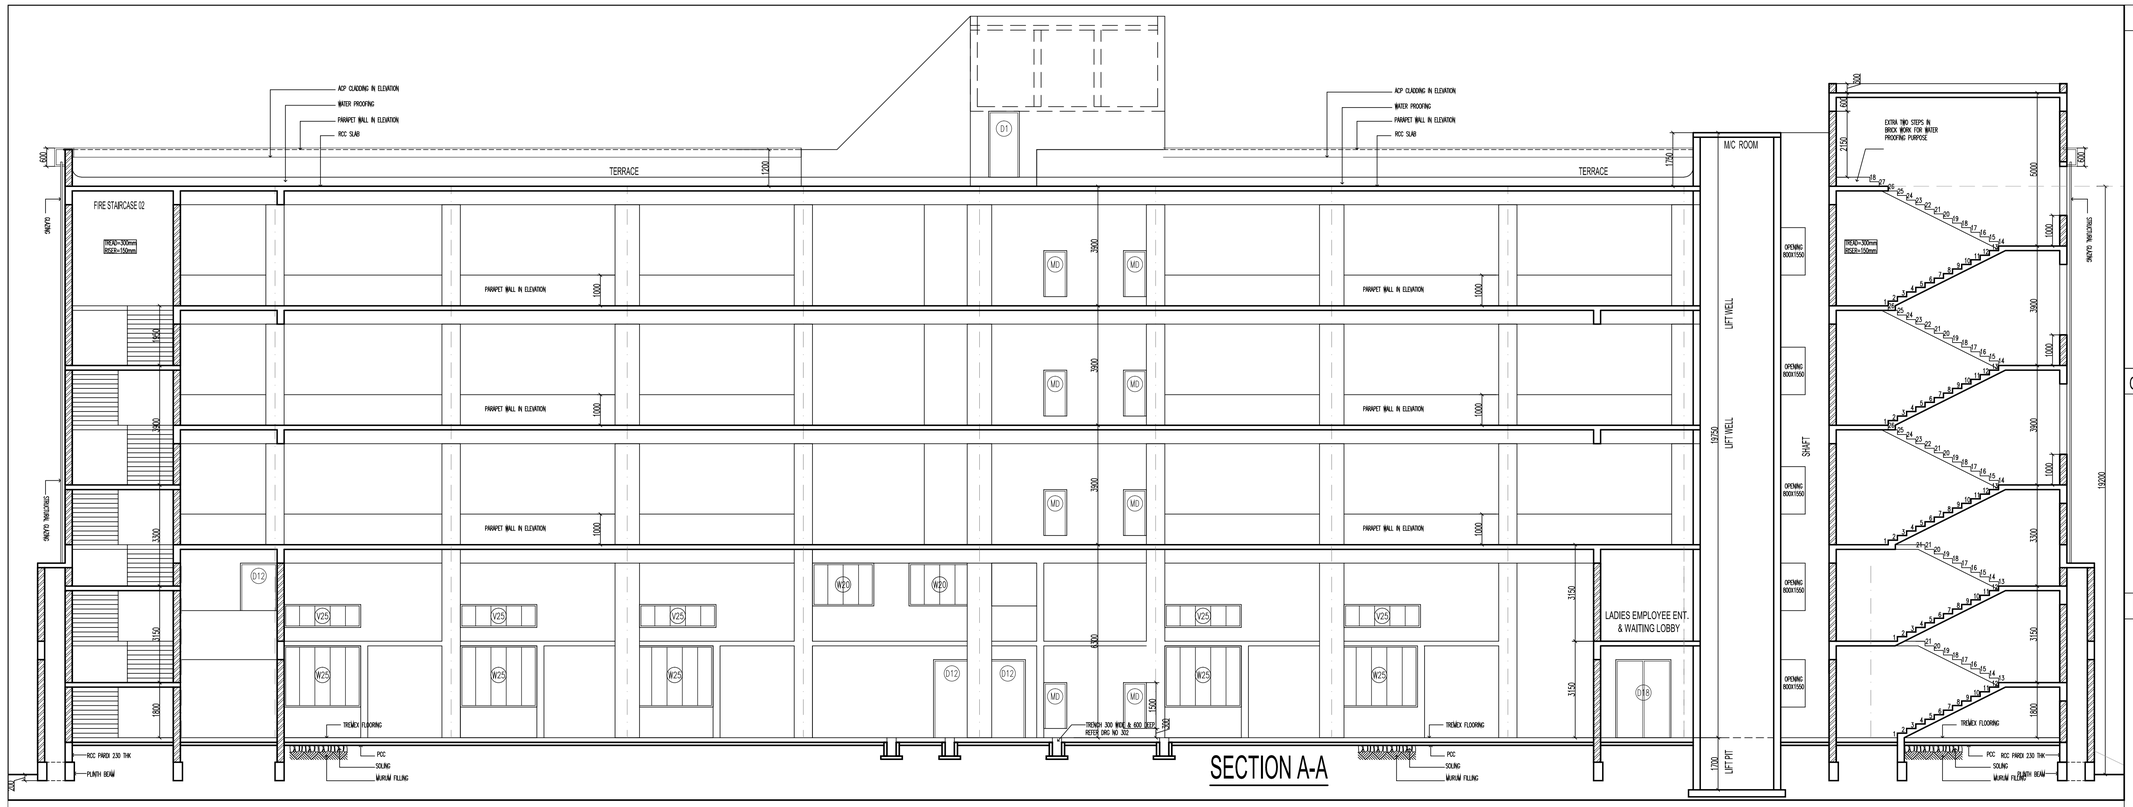


SECTION A-A

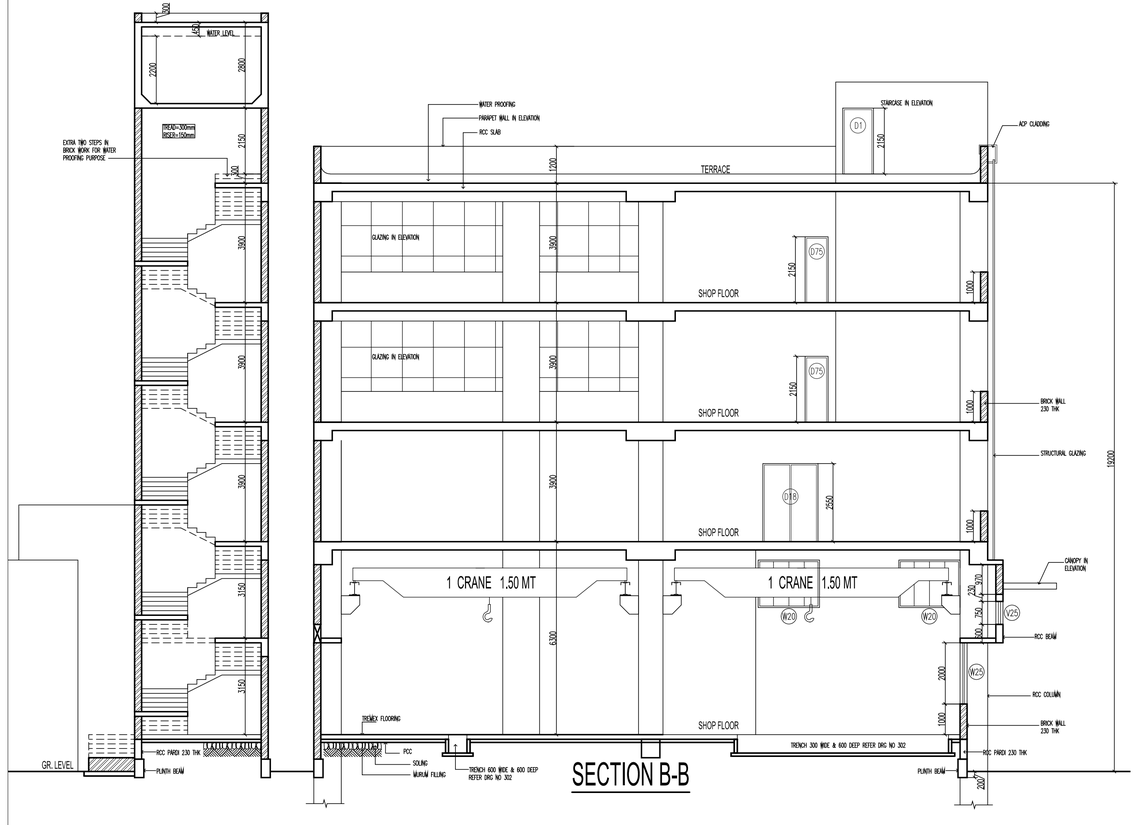


SECTION B-B

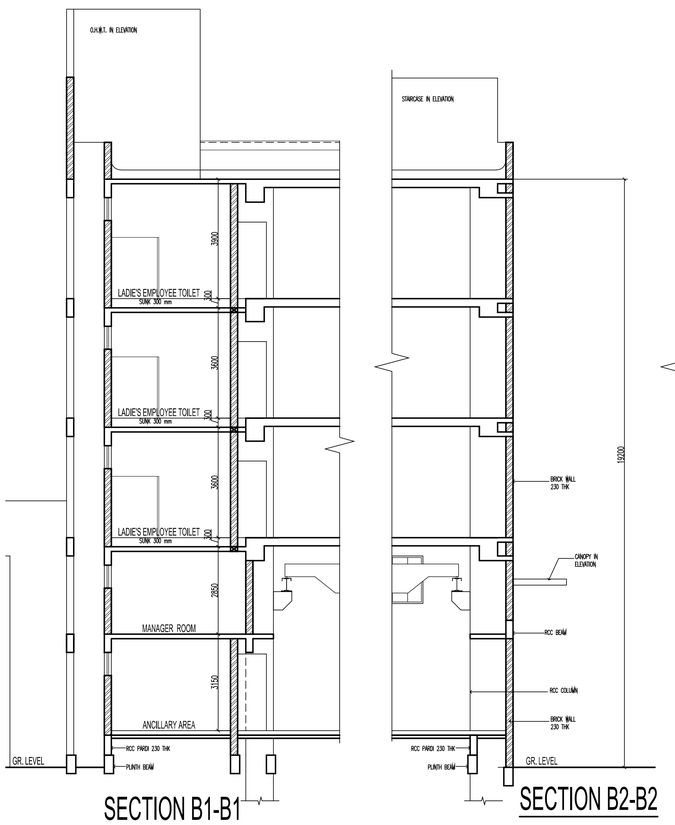

SECTION B1-B1

SECTION B2-B2

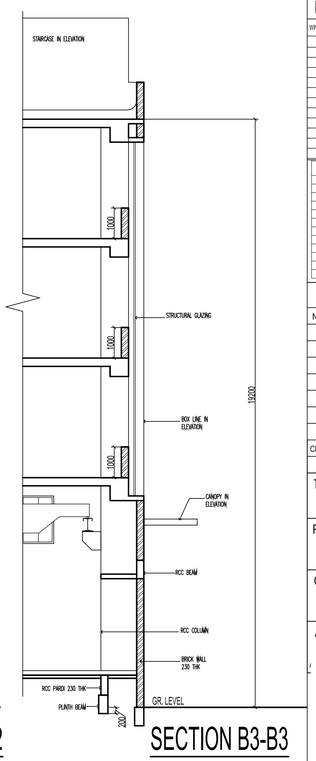

SECTION B3-B3

KEY PLAN

GENERAL NOTES

1) DRAWING SHALL NOT BE SCALED ONLY WRITTEN DIMENSIONS ARE TO BE FOLLOWED.
2) READ THIS DRAWING ALONG WITH THE STRUCTURAL / ENGINEER'S DRAWING.
3) ANY AMBIGUITY IN THIS DRAWING TO BE REFERRED TO THE ARCHITECT BEFORE THE EXECUTIONS OF THE WORK.
4) ALL DIMENSIONS ARE IN M.M. UNLESS OTHERWISE MENTIONED.
5) EVERY JOINT BETWEEN ANY R.C.C. MEMBER & BRICKWORK IS TO BE COVERED WITH WELDED MESH BEFORE PLASTERING.
6) PEB STRUCTURE & ROOFING CLADDING ARE NOT IN CIVIL CONTRACTOR'S SCOPE & SHOWN ONLY FOR THE INFORMATION. SHAPE OF ROOFING CLADDING MAY CHANGE AS PER PEB FINAL DESIGN.
7) FOR STRUCTURAL DETAILS REFER STRUCTURAL DRAWINGS.

LEGEND

DOOR WINDOW SCHEDULES

WINDOW NAME	LENGTH	HEIGHT	GR. FLOOR	MEZZA FLOOR	1st FLOOR	2nd FLOOR	3rd FLOOR	TERRACE FLOOR	TOTAL Nos
W36	3.60	1.50	0	1	0	0	0	0	1
W25	2.50	2.00	14	3	0	0	0	0	17
W20	2.00	2.00	2	4	0	0	0	0	6
W6T	0.60	0.90	0	0	1	1	1	0	3
V30	3.00	0.75	0	2	0	0	0	0	2
V25	2.50	0.75	3	18	5	4	4	0	34
V20	2.00	0.75	0	2	0	0	0	0	2
V24	2.45	0.75	0	1	0	0	0	0	1
V18	1.87	0.75	1	1	1	1	1	0	5
V14	1.44	0.75	1	0	0	0	0	0	1
V11	1.14	0.75	1	0	0	0	0	0	1
TOTAL			22	32	7	6	6	0	73

DOOR NAME	LENGTH	HEIGHT	GR. FLOOR	MEZZA FLOOR	1st FLOOR	2nd FLOOR	3rd FLOOR	TERRACE FLOOR	TOTAL Nos	REMARK
RS3	3.00	3.00	3	0	1	1	1	0	6	ROLLING SHUTTER
RS4	3.60	3.00	3	0	0	0	0	0	3	ROLLING SHUTTER
GD	1.80	3.00	2	0	0	0	0	0	2	GLASS DOOR
D18	1.80	2.55	2	1	2	1	1	0	8	
FD1	2.80	2.55	1	1	1	1	1	0	5	FIRE DOOR
FD	1.20	2.55	3	2	2	2	2	0	11	FIRE DOOR
D12	1.20	2.55	2	2	0	0	0	0	4	
D10	1.00	2.15	0	0	0	0	2	0	2	
D1	1.00	2.55	6	1	4	2	2	0	15	
D75	0.75	2.15	0	0	1	1	1	0	3	
MD	0.75	1.50	5	4	4	4	4	0	21	METAL DOOR
TOTAL			27	11	16	12	12	2	80	

REVISIONS

NOS	REVISION DATE	DESCRIPTION	NOS	REVISION DATE	DESCRIPTION

CHECKED BY	DRAWN BY	SCALE	JOB NO	BUILDING	DRG. NO
QADIR	VINAYAK	1:100			ARCH / TD / 301

TITLE : SECTION A-A, B-B, B1-B1, B2-B2 & B3-B3

PROJECT :

CLIENT :

ARCHITECT'S NAME: SIGNATURE