RPPL
RATNARUP PROJECTS PVT. LTD.

WORK ORDER

202/203, Amar Neptune, Baner Road, Behind Baner Food Bazar, Baner, Pune - 411045
Tel: (020) 27290344 / Fax: 27290343, Email: purchase@ratnarupprojects.com
VAT / TIN No.: 27180959179V, CST No.: 27180959179C

TO, **NIHVA Technologies Pvt Ltd** 187, G-BLOCK, THERMAX CHOWK, MIDC CHINCHWAD PUNE – 411019 GST NO :- 27AAECN0437H1ZM	**W/O NO**	**RPPL/PUNE/2258/ KINGFA / 2018-19**
	SITE	Ratnarup Projects Pvt. Ltd. **KINGFA SCIENCE & TECHNOLOGY** (INDIA), LTD. PLOT NO- F-5/5, PHASE-II, MIDC CHAKAN, SHINDE-VASULI, TAL-KHED, DIST- PUNE. MR. DAREKAR - 9527919393 GST NO - 27AAFCR9419J1ZW
	DATE	**17-11-2018**

Subject: Work Order for Supply & fixing of Fire rated MS Steel Sliding Door as per details given below.

With reference to your revised quotation dated: 03-11-2017 and further discussion, we are pleased to issue this order for supply and installation of Nihva Make Sliding doors as per terms and conditions stated below and overleaf.

Sr.	Item Description	Unit	Qty	Rate	Amount
	PROVIDING & FIXING 'NIHVA' MAKE FIRE RATED SLIDING STEEL DOOR.:- Providing fixing 2 hour fire rated double skin steel door (46-55mm thick) of approved make, single/double leaf with 1.0mm thk galvanized steel sheet on both sides fitted on internal ms hollow tube framing, duly filled in with honeycomb kraft paper core as infill material, 2mm thick GI door frame of size 143 x 57 mm(+/- 3 mm) as per manufacturers specifications, surface drop seal, bracing at bottom, glass view panel, including all approved type(Dorma Make) heavy duty fastenings and fixtures comprising of :S.S. hinges, Panic bar handle inside, air seal gaskets between shutter and frame and door closer etc complete. Door to be certified as per CBRI norm. Make - Nihva				
1	**FIRE RATED STEEL SLIDING DOOR: -** **SIZE: - 1600 MM (W) X 2200 MM (H) – 01 NOS** **DRAWING NO: - DSSF1622**	Sqmtr	3.52	43271.00	152313.92
				TOTAL BASIC AMOUNT	152313.92
				ADD:- GST @ 18%	27416.51
				GRAND TOTAL	179730.00

For , Ratnarup Projects Pvt. Ltd.

Authorized Signatory

For, Nihva Technologies Pvt. Ltd.

Authorized Signatory

202/203, Amar Neptune, Baner Road, Behind Baner Food Bazar, Baner, Pune - 411045
Tel: (020) 27290344 / Fax: 27290343, Email: purchase@ratnarupprojects.com
VAT / TIN No.: 27180959179V, CST No.: 27180959179C

➢ SPECIFICATIONS OF THE FIRE DOOR: -

1) 3) Door Frame – 143 x 57 MM thick.
2) Infill Material – Hony comb.
3) Fire Rating - 2 Hours.
4) Color – As per Approved.
5) Finish – Powder Coated finish.
6) Hardware – Dorma (As per Approved Drawing & BOQ)
7)Sizes: - As per Actual (As per Drawing)
8) Panic Bar :- Not considered.
9) Anchor Fasteners for Frame – Hilti Make

➢ TERMS & CONDITIONS:-

1. The above offer is inclusive of cost of material with all accessories, loading – unloading, installation and all taxes except LBT (Not Applicable).
2. All material are to be delivered in our store with delivery challan. For unloading labour shall be provided by us and to be unloaded under your supervision.
3. Your technician should visit the site to take the actual measurement of Sliding steel doors before preparation of shop drawing.
4. **The delivery should be given within 3 to 4 weeks including submission of shop drawing (the shop drawing shall be approved by Project Manager on same day of submission or next day. However, the installation and completion in all respect to be done immediate as instruction by Projects manager.**
5. The Doors shall have paint / color: - As per approved sample / RAL shade/ shop drawing.
6. In case of any clarification please coordinate with our interior Project Manager Mr. Yakob (Cell No – 9552851511) whose decision shall be conclusive.
7. **Payment Terms: -**
   1) 50% - Advance along with Purchase order.
   2) 40% - Against delivery of material at site.
   3) 10% -15 days after installation of all Sliding doors at site and satisfactory report by Project Manager

For , Ratnarup Projects Pvt. Ltd.

Authorized Signatory

For, Nihva Technologies Pvt. Ltd.

Authorized Signatory

202/203, Amar Neptune, Baner Road, Behind Baner Food Bazar, Baner, Pune - 411045
Tel: (020) 27290344 / Fax: 27290343, Email: purchase@ratnarupprojects.com
VAT / TIN No.: 27180959179V, CST No.: 27180959179C

8. **Transportation: -**
   1) Transportation charges will be extra at actual.

9. **Installation: -**
   1) Installation Charges are included in above rates.

10. GST: GST @ 18% extra added in P.O. & all other taxes are included & incidental charges if any shall be borne by you.
11. Actual clear measurement of sliding door will be taken after completion of work and payment shall be made accordingly.
12. TDS will be deducted as per application rule. TDS certificate will be issued to you after financial year.
13. The work should be carried out as per drawing & specification supplied to you and instructions given by our Project Manager and client engineers at site.
14. In case of increase in number of doors the same rate and terms shall be applied for this project.
15. In case any material found to be defective during installation, you should alter and replace the same at your cost.
16. You will give 1 Year warranty of doors and hardware from the date of installation against any manufacturing defects under normal services conditions.
17. Manufacturer test report / certificate to be attached with challan and bill.
18. You will deploy trained persons for erection & fixing of doors.
19. You will bring adequate machinery required for the job.
20. The material should be strictly as per specification and subject to approval by P.M. and client consultant.
21. Defective / unsatisfactory material will be rejected and rejected material will be kept or returned at your cost.
22. All hardware material, fittings, sealant & fixture are as per standard, best quality and as agreed and approved by us.
23. All specification, drawing, samples, tools and other data supplied along with the order and same should be returned along with the bill.
24. Electricity will be supplied to you at one point by company near your working place. However further distribution (wherever needed) & panel boards, main switches, cables etc; shall be arranged by sub-contractor's cost.

For , Ratnarup Projects Pvt. Ltd.

Authorized Signatory

For, Nibva Technologies Pvt. Ltd.

NIBVA TECHNOLOGIES PVT. LTD. PUNE

Authorized Signatory

202/203, Amar Neptune, Baner Road, Behind Baner Food Bazar, Baner, Pune - 411045
Tel: (020) 27290344 / Fax: 27290343, Email: purchase@ratnarupprojects.com
VAT / TIN No.: 27180959179V, CST No.: 27180959179C

25. No loose electrical connection will be permitted under any cost. Proper 5 pin plugs will be used for connection. Provision for ELCB if necessary should be made.
26. We are not responsible for any injury, casualty for your labour.
27. Rates shall be firm and unchanged till completion of this contract.
28. Work shall be carried as per specification and up to satisfaction of PM, Client.
29. You shall bring all PPE's /Safety equipments at your cost or will be supplied by company and debited to your account.
30. You will ensure all Safety requirements as required by the company, consultants and clients.
31. Rates include minor works also.
32. No item will be measured departmentally unless it is explicitly agreed by the site in change.
33. The Completion of work shall be within 30 days from the date of this order.
34. All labour laws, Insurance, ESIS, PF and compensation for accident etc; for your labours will be your responsibility.
35. The work shall be carried out as per the safety norms of the company.
36. All workers must wear all safety PPE's required for the job as described by our safety officer.
37. PPE's cost will be debited form your bill if the same not returned to us after completion of your work.
38. All consumable and all other implements and equipments, machinery etc. required for the work shall be brought by you in adequate nos.
39. Any changes in order is not valid unless it is confirmed in writing by us.
40. The terms and conditions stated in this order supersedes all other terms stated in quotation submitted prior to this date.
41. Bill should be submitted in office only along with Delivery challan and order copy.
42. Please sign this Work/Purchase order as token of acceptance and for acknowledgement.


(All terms & conditions are read by me and acceptable to me.)


For , Ratnarup Projects Pvt. Ltd.


Authorized Signatory

For, Nihva Technologies Pvt. Ltd.


Authorized Signatory

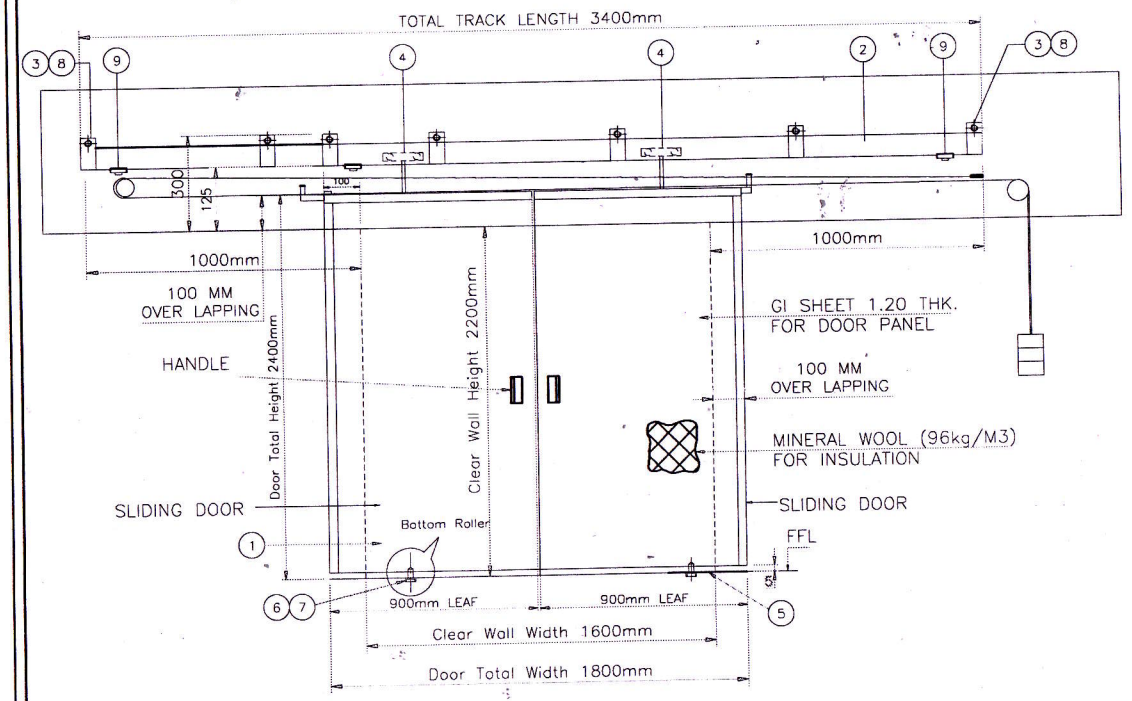

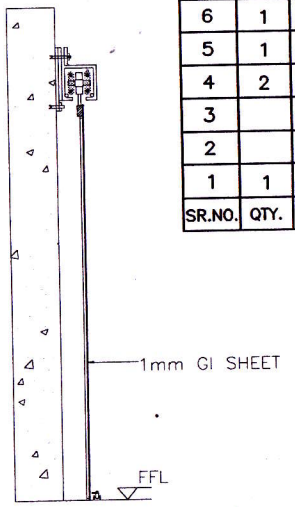




DETAIL AT 'B'

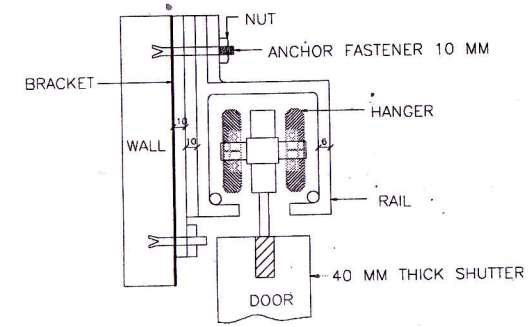

SR.NO.	QTY.	DESCRIPTION
9	1	STOPPER (FOR HANGER ASSLY.)
8	1	COVER (FOR TRACK BKT.)
7	1	BOTTOM ROLLER MTG. FLAT (BOTTOM ROLLER BKT.)
6	1	BOTTOM ROLLER ASSLY.
5	1	'Z' SECTION
4	2	HANGER ROLLER ASSLY./PANEL
3		TRACK BRACKET
2		SLIDING TRACK
1	1	SLIDING DOOR & FRAME / BACK SUPPORT SQ. TUBE



DETAIL–'A'



'C' SECTION USING AGAINST HOLLOW SECTION 70x40.

DETAIL–C PROFILE FOR FRAME

DOOR DIMENSION		
CLEAR WIDTH	CLEAR HEIGHT	
1600mm	2200mm	01NOS

Panel Make : - Radient Safe Door Make

REV	DESCRIPTION	DRAWN	DATE
R03	AL DROP LOCKING ARRANGEMENT REMOVE	A.K.	05.15.2018
R02	DRG. REVISED AS PER MARK.	A.K.	29.11.2018
R01	PANEL DETAIL ADDED	A.K.	28.11.2018

NOTE : DOOR OVERLAPING 100mm AT RH & LH AND TOP SIDE
ALL DIMENSIONS ARE IN MM.
CLIENT SHOULD CONFIRM DOOR OPENING DIRECTION.

TOLERANCE:- ± 10mm

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: AUTOMATIC SLIDING DOOR

NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Website:- www.nihva.com
Email:- info@nihva.com

	NAME	SIGN	DATE
DRAWN	SURAJ		21/11/18
CHECK	P.A		20/11/18
APPROVAL	R.D		20/11/18

If any queries contact : design@nihva.com
ALL DIMENSION ARE IN mm

CLIENT - RATNARUP PROJECT PVT. LTD.
PROJECT -RATNARUP PROJECT PVT. LTD.
SITE - BANNER,PUNE.
DWG. NO. : NIHVA/18-19/0181/R02 REV-02
SCALE: NTS WT: SHEET: 01 OF 01