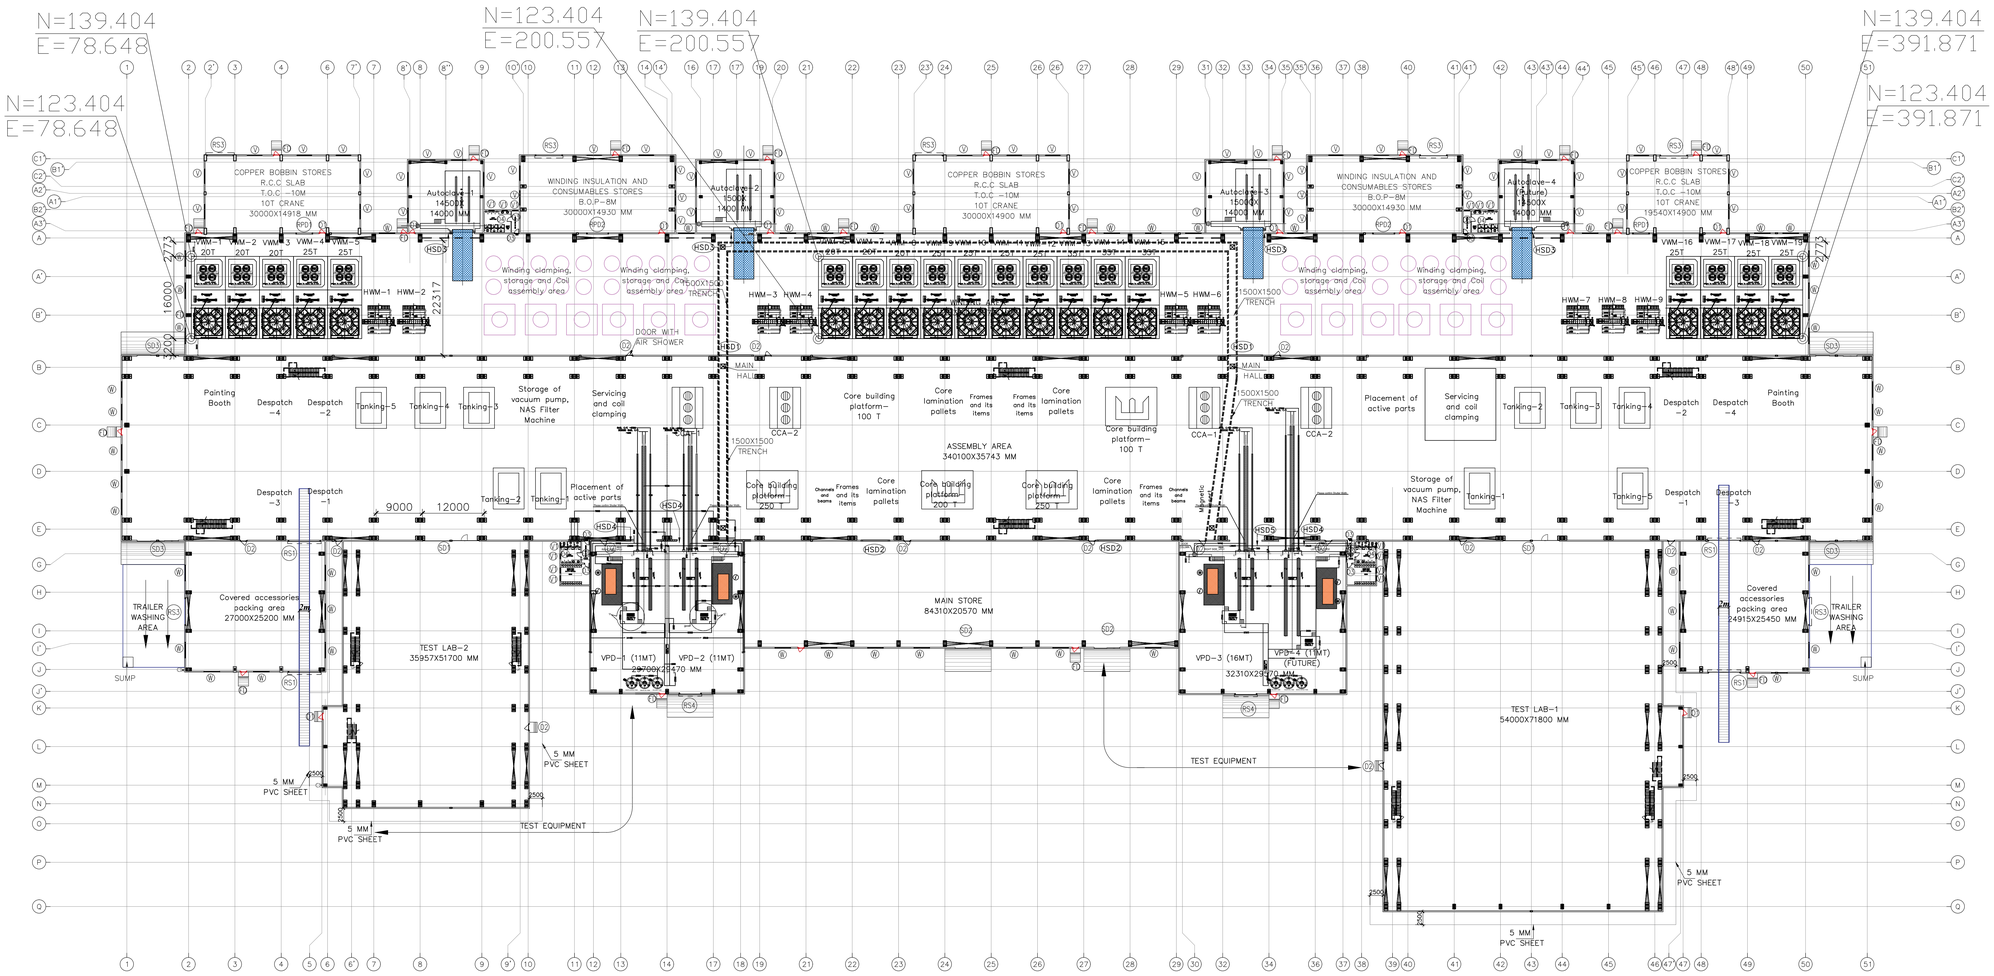


OPENING SCHEDULE GROUND FLOOR						
TYPE	CLEAR SIZE	WITH STONE FRAME SIZE	FINISHED SILL	FINISHED LINTEL	NOS.	DESCRIPTION
ROLLING SHUTTER						
RS1	6000X6000	–	–	6000	04	MOTORIZED MS ROLLING SHUTTER
RS3	5000X5000	–	–	5000	07	MOTORIZED MS ROLLING SHUTTER
RS4	4000X5000	–	–	5000	02	MOTORIZED MS ROLLING SHUTTER
HSD1	6000X4500	–	–	4500	02	HIGH SPEED DOOR
HSD2	5000X5000	–	–	5000	02	HIGH SPEED DOOR
HSD3	4800X6000	–	–	6000	04	HIGH SPEED DOOR
HSD4	5200X6200	–	–	6200	03	HIGH SPEED DOOR
HSD5	6200X6800	–	–	6800	01	HIGH SPEED DOOR
SD1	11000X15000	–	–	15000	02	SLIDING DOOR WITH MAN ENTRY
SD2	5000X5000	–	–	5000	02	SLIDING DOOR WITH MAN ENTRY
SD3	8000X6500	–	–	6500	04	SLIDING DOOR WITH MAN ENTRY
RPD1	3000X4000	–	–	4000	02	RAPID DOOR
RPD2	4000X5000	–	–	5000	02	RAPID DOOR
DOOR						
FD	1200X2400	1400X2450	–	2450	23	EMERGENCY FIRE EXIT DOOR
D1	1200X2400	–	–	–	11	STEEL DOOR WITH VISION PANEL (IN PEB)
D2	1200X2400	1300X2450	–	2450	21	STEEL DOOR WITH VISION PANEL
D3	900 X 2400	1000X2450	–	2450	10	STEEL DOOR WITHOUT VISION PANEL
D4	750 X 2100	850X2150	–	2150	12	STEEL DOOR WITHOUT VISION PANEL
WINDOW						
W	3000X1450	3100X1550	900	2450	48	ALUMINUM SLIDING WINDOW STONE FRAME ON FOUR SIDE
VENTILATION						
V	3000 X 600	–	1750	–	56	ALUMINUM FIX GLASS WITH EXHAUST FAN(IN PEB)
V1	1200 X 600	1300 X 700	1750	2450	14	ALUMINUM FIX GLASS WITH EXHAUST FAN

REFERENCE DRAWINGS

SR.NO.	DRAWING TITLE	DRAWING NO.

NOTE :-

1. DO NOT SCALE THE DRAWING. REFER TO WRITTEN DIMENSIONS ONLY. ALL MEASUREMENTS MUST BE CHECKED AND VERIFIED AT SITE. ANY DISCREPANCY FOUND,TO BE NOTIFIED TO THE CONSULTING ENGINEER BEFORE EXECUTION.
2. ALL DIMENSIONS ARE IN MM.& ALL LEVELS ARE IN METERS UNLESS OTHERWISE SPECIFIED.
3. F.G.L & F.R.L AS PER SITE ROAD LAYOUT PLAN.

ABBREVATION :-

N.G.L	= NATURAL GROUND LEVEL
F.G.L.	= FINISHED GROUND LEVEL
F.R.L.	= FINISHED ROAD LEVEL
F.F.L.	= FINISHED FLOOR LEVEL
T.O.C.	= TOP OF CONCRETE
T.O.W.	= TOP OF WALL
B.O.C.	= BOTTOM OF CONCRETE
B.O.W.C	= BOTTOM OF WALL CLADDING
B.O.P	= BOTTOM OF PORTAL
T.O.T	= TOP OF CABLE TRAY
T.O.G	= TOP OF GANTRY
T.O.B	= TOP OF BEAM
T.O.F	= TOP OF FASCIA

LEGEND :-

230MM THK. BRICK MASONRY WALL

115MM THK. BRICK MASONRY PARTITION WALL

KEY - PLAN :

N

REV.	DATE	DESCRIPTION	DRN.	CHK.	APP.	PRN.
R0	26-12-25	ISSUED FOR APPROVAL (VPD,VDP OPENING CHANGE)	JP	GJT	GJT	EMAIL
R0	24-12-25	ISSUED FOR APPROVAL (VPD,VDP OPENING CHANGE)	JP	GJT	GJT	EMAIL
R0	15-12-25	ISSUED FOR APPROVAL (OPENING CHANGE)	JP	GJT	GJT	EMAIL
R0	11-12-25	ISSUED FOR INFORMATION (OPENING CHANGE)	JP	GJT	GJT	EMAIL
R0	05-12-25	ISSUED FOR INFORMATION	JP	GJT	GJT	EMAIL

ISSUED FOR

☐ INFORMATION ☑ APPROVAL ☐ CONSTRUCTION

☐ ENQUIRY ☐ ORDER ☐ REVIEW

CLIENT : **TRANSFORMER FACT (45000 MVA) FOR CG POWER AT JAHANGIRPURA**

PROJECT : 45000 MVA PLANT

CONSULTANT : SHAH & TALATI Design & Engineering
9th FLOOR, KIRTI TOWER, TILAK ROAD, VADODARA-390001, GUJARAT, INDIA.
PHONE : +91-265-2440701 / 2440726
E-MAIL : design@shahntalati.com
WEBSITE : www.shahntalati.com

PROJECT NO. :- **2537**

TITLE :- **FACTORY LAYOUT**

DRAWN BY	JANKI		R0 26 12 25
CHECKED BY	GJT		
APPROVED BY	GJT		
DRAWING NO.	**2537-FAC-A01-SH1-A1-R0**		SHEET 1 OF 1
SCALE : 1:600			

THIS DOCUMENT OR DRAWING IS THE PROPERTY OF SHAH & TALATI CONSULTING ENGINEERS AND SHALL NOT, UNDER ANY CIRCUMSTANCES, BE TOTALLY OR PARTIALLY, DIRECTLY OR INDIRECTLY, TRANSFERRED, REPRODUCED, COPIED, DISCLOSED OR USED WITHOUT SHAH & TALATI'S PRIOR WRITTEN CONSENT.

A1