NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

M/s SDF India pvt ltd
Ranipet, Tamilnadu

Date : 10.02.2021
Quote NO : SQT.20.21.2930R4
Kind Attn : Mr.Divakar. K
Email Id : Divakar.K@cushwake.com
Contact No: 7824880720

Subject : Revised Quotation for ASSA ABLOY Make Telescopic & Swing Dock Leveller .

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions. This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2
C.	General Conditions	3
D.	Terms & Condtions	3

A) Commercial Offer -Price Includes Customs Duty , Customs Clearance & Local Transporartion till Site

Sr No	Description	Size		Qty	Supply Charges in INR		Installation Charges in INR	
		Clear Width (mm)	Clear Length (mm)	(Nos)	Unit Price	Total Amount	Unit Price	Total Amount
1	ASSA ABLOY DL6121T 150kN - Telescopic Dock Leveller	2000	3000	1	820,000	820,000	15,000	15,000
2	ASSA ABLOY DL6111S 200kN - Swing Dock Leveller	2000	2500	2	620,000	1,240,000	15,000	30,000
3	ASSA ABLOY DL6111S 200kN - Swing Dock Leveller	2200	3000	2	640,000	1,280,000	15,000	30,000
OR-4	ASSA ABLOY DL6111S 200kN - Swing Dock Leveller	2200	4000	2	670,000	-	15,000	-
				Total		**3,340,000**		**75,000**
			P&F Charges	3%		**100,200**		
			Total Without Taxes			**3,440,200**		**75,000**
5			**Transportation Charges**			**35,000**		
6			**Unloading Charges @ Site**			**12,000**		
7			**GST Extra @ 18%**	18%		**EXTRA**		**EXTRA**

A-1) Commercial Offer -Price Includes Customs Clearance & Local Transporartion till Site - High Sea Sale

Sr No	Description	Size		Qty	Supply Charges in INR		Installation Charges in INR	
		Clear Width (mm)	Clear Length (mm)	(Nos)	Unit Price	Total Amount	Unit Price	Total Amount
1	ASSA ABLOY DL6121T 150kN - Telescopic Dock Leveller	2000	3000	1	722,000	722,000	15,000	15,000
2	ASSA ABLOY DL6111S 200kN - Swing Dock Leveller	2000	2500	2	546,000	1,092,000	15,000	30,000
3	ASSA ABLOY DL6111S 200kN - Swing Dock Leveller	2200	3000	2	564,000	1,128,000	15,000	30,000
OR-4	ASSA ABLOY DL6111S 200kN - Swing Dock Leveller	2200	4000	2	590,000	-	15,000	-
				Total		**2,942,000**		**75,000**
			P&F Charges	3%		**88,260**		
			Total Without Taxes			**3,030,260**		**75,000**
5			**Transportation Charges**			**In Client Scope**		
6			**Unloading Charges @ Site**			**12,000**		
7			**GST Extra @ 18%**	18%		**EXTRA**		**EXTRA**


NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

ASSA ABLOY Make Telescopic Dock Leveler DL6121T 150kN

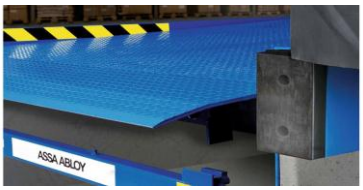

Sr. No	Description	Specifications
1	Nominal Width	2000 mm
2	Nominal Length	3000 mm
3	Leveller Height	800 mm
4	Load Capacity	150 kN
5	Leveller Surface Treatment	RAL 5010 (Gentian Blue)
6	Leveller Paint class	80 µm
7	Lip Material	Steel
8	Lip Length	1000 mm
9	Tearplate Thickness	10 mm
10	Control Box	950 LA
11	Free space under lip	285
12	Lip Bevellment	40 mm
13	Control System	Mains Switch

ASSA ABLOY Make Swing Dock Leveler DL6111S -200kN



SIZE - (W) 2000 mm x (L) 2500 mm

Sr. No	Description	Specifications
1	Nominal Width	2000 mm
2	Nominal Length	2500 mm
3	Leveller Height	700 mm
4	Load Capacity	200 kN
5	Leveller Surface Treatment	RAL 5010 (Gentian Blue)
6	Leveller Paint class	80 µm
7	Lip Material	Steel
8	Lip Length	500 mm
9	Tearplate Thickness	10 mm
10	Control Box	950 LA
11	Free space under lip	230
12	Lip Bevellment	40 mm
13	Control System	Mains Switch

SIZE - (W) 2200 mm x (L) 3000 mm

Sr. No	Description	Specifications
1	Nominal Width	2200 mm
2	Nominal Length	3000 mm
3	Leveller Height	750 mm
4	Load Capacity	200 kN
5	Leveller Surface Treatment	RAL 5010 (Gentian Blue)
6	Leveller Paint class	80 µm
7	Lip Material	Steel
8	Lip Length	500 mm
9	Tearplate Thickness	10 mm
10	Control Box	950 LA
11	Free space under lip	230
12	Lip Bevellment	40 mm
13	Control System	Mains Switch

SIZE - (W) 2200 mm x (L) 4000 mm

Sr. No	Description	Specifications
1	Nominal Width	2200 mm
2	Nominal Length	4000 mm
3	Leveller Height	900 mm
4	Load Capacity	200 kN
5	Leveller Surface Treatment	RAL 5010 (Gentian Blue)
6	Leveller Paint class	80 µm
7	Lip Material	Steel
8	Lip Length	500 mm
9	Tearplate Thickness	8 mm
10	Control Box	950 LA
11	Free space under lip	230
12	Lip Bevellment	40 mm
13	Control System	Mains Switch

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

Note: Please find below List which are in Client Scope

Sr. No	Description	Remark
1	Secured and fully covered Store area to keep the material	In Client Scope
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site	In Client Scope
3	Electrical Supply on the site single phase/three phase points at different places.	In Client Scope
4	Any civil / masonry/structural work required	In Client Scope
5	All structure support required	In Client Scope
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.	In Client Scope
7	Conduits, Cables required	In Client Scope

D) Terms & Conditions

Price : Ex works Pune

Delivery : 12 Weeks from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

Payment : 25% ABG along with Confirmed Purchase Order , 65% on supply at site & 10% agaist Installation.

Validity : Validity of Offer is 15 days from the date of quotation

Warranty : 12 months from the date of supply.

For any further Clarification /Information in this Concern, Please feel free to Contact **Mr.Shrikant Mirkute on 8551098333**

With Best Regards
Pradeep Shinde
8551096333
For NIHVA Technologies Pvt Ltd