NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

M/s SDF India pvt ltd
Ranipet, Tamilnadu

Date : 28.01.2021
Quote NO : SQT.20.21.2930R1
Kind Attn : Mr.Divakar. K
Email Id : Divakar.K@cushwake.com
Contact No: 7824880720

Subject : Revised Quotation for ASSA ABLOY Make Telescopic Dock Leveller & Nihva Make Swing Dock Leveller

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions. This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2
C.	General Conditions	3
D.	Terms & Condtions	3

A) Commercial Offer

Sr No	Description	Size		Qty	Supply Charges in INR		Installation Charges in INR	
		Clear Width (mm)	Clear Length (mm)	(Nos)	Unit Price	Total Amount	Unit Price	Total Amount
1	ASSA ABLOY DL6121T 150kN - Telescopic Dock Leveller	2000	3000	1	880,000	880,000	20,000	20,000
2	NIHVA MAKE Swing Dock Leveler - 20 TON	2000	2500	2	220,000	440,000	20,000	40,000
3	NIHVA MAKE Swing Dock Leveler - 20 TON	2200	4500	2	350,000	700,000	20,000	40,000
			Total			**2,020,000**		**100,000**
	P&F Charges			3%		**60,600**		
	Total Without Taxes					**2,080,600**		**100,000**
	GST Extra @ 18%			18%		374,508		18,000
	Total With Taxes					**2,455,108**		**118,000**
4	Transportation Charges					**Extra at Actual**		
5	Unloading Charges @ Site					**In client scope**		


NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

ASSA ABLOY DL6121T 150kN

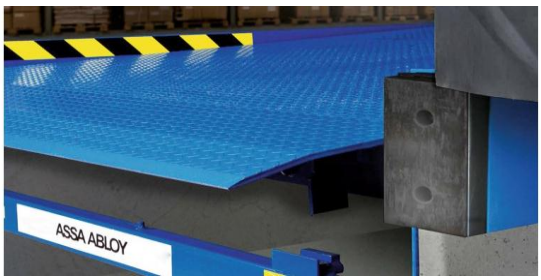

Sr. No	Description	Specifications
1	Nominal Width	2000 mm
2	Nominal Length	3000 mm
3	Leveller Height	800 mm
4	Load Capacity	150 kN
5	Leveller Surface Treatment	RAL 5010 (Gentian Blue)
6	Leveller Paint class	80 µm
7	Lip Material	Steel
8	Lip Length	1000 mm
9	Tearplate Thickness	10 mm
10	Control Box	950 LA
11	Free space under lip	285
12	Lip Bevellment	40 mm
13	Control System	Mains Switch

NIHVA MAKE Swing Dock Leveler - 20 TON





Sr. No	Description	Specifications
1	Capacity	20 TON
2	Dock operation mode	AC power pack hydraulically operated
3	Travel above & below dock level	(+) 640 / (-) 350 mm
4	Platform Size (W x L)	2200 mm x 4500 mm & 2000 mm x 2500 mm
5	Maximum slope can be achieved	10%
6	Driver type	Direct by electric Motor
7	Road level to dock height	1000 mm
8	Operation control	Through panel - Standpost Mounted

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

Note: Please find below List which are in Client Scope

Sr. No	Description	Remark
1	Secured and fully covered Store area to keep the material	In Client Scope
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site	In Client Scope
3	Electrical Supply on the site single phase/three phase points at different places.	In Client Scope
4	Any civil / masonry/structural work required	In Client Scope
5	All structure support required	In Client Scope
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.	In Client Scope
7	Conduits, Cables required	In Client Scope

D) Terms & Conditions

Price	: Ex works Pune
Delivery	: 19 - 20 weeks for ASSA ABLOY DL & 10-11 Weeks for Nihva Make DL from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.
Payment	: 80% Advance along with Confirmed Purchase Order & Balance before dispatch.
Validity	: Validity of Offer is 15 days from the date of quotation
Warranty	: 12 months from the date of supply.

For any further Clarification /Information in this Concern, Please feel free to Contact **Mr.Shrikant Mirkute on 8551098333**

With Best Regards
Pradeep Shinde
8551096333
For NIHVA Technologies Pvt Ltd