NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

# Sales Quotation

**Quotation No - SQT/18-19/1398** **27.03.2019**

**Profline Group., Ltd.**
28 Dubrovytska st. Kiev Ukraine,

**Kind Attn:** Mr.Wahtang Kiriya
**Email:** info@plco.com.ua
**Contact No:** tel +380 67 234-18-41


**Project Name And Location :**

**Subject :** Quotation for Telescopic Conveyor

Dear Sir
Thank you for your opportunity and trust shown on "NIHVA." your preferred partner for innovative solutions.
This has reference to your above mentioned requirement as well as our subsequent communication. Please find below our best offer.

**Commercial Offer**

**Telescopic Belt Conveyor (Made in India)**

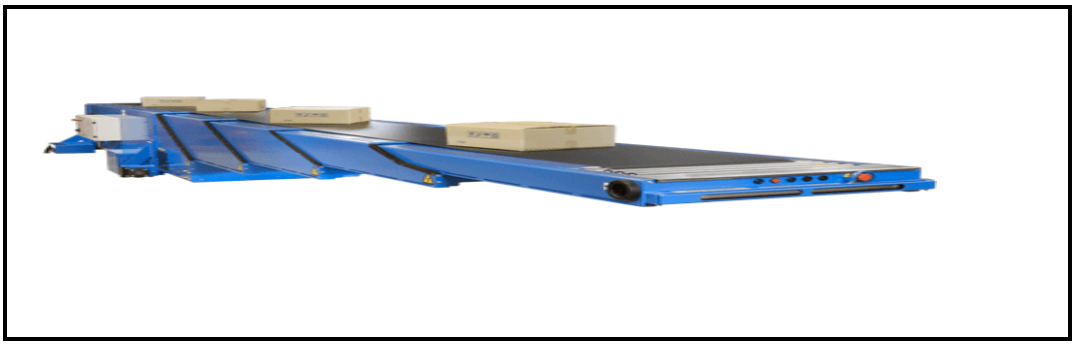

| Sr. No. | Description | Qty | Unit | Rate In INR | Net Amount INR |
|---|---|---|---|---|---|
| A | **Telescopic Conveyor (Made in India) ( Supply + Installation )** | | | | |
| 1 | 1)Size of Conveyor = 12 Mtr<br>2) Elongated length with no of boom = 5.5 mtr with 3 elongated boom<br>3)Collapsed length = 6.5 mtr<br>4) Width of belt = 900 mm<br>5) Speed of Conveyor = Speed given to belt drive (VFD Controlled ) (36mtr/min)<br>a)Max Speed = 150 Rpm<br>b)Min Speed = 70 Rpm<br>6) peed of conveyor (with load )<br>a)Max Speed = 110 rpm<br>b)Min Speed = 70 rpm<br>7)Cycle time (for telescopic operation = 100 - 150 sec<br>8) Cycle time (for telescopic collasing operation = 100 - 120 sec<br>9) Capacity of conveyor = 200 kg / mtr<br>10) weight of total system = 790 kg<br>11) Roller guide with chain drive for telescopic operation<br>12) brake motor used in conveyor<br>13)hydraullic lifting arrangement for conveying height adjustment<br>14) Rigid piping of Hydraullic connections<br>15)cable Routing through Flexible conduit<br>16)Belt Tighetening arrangement to avoid slagging in belt<br>17)Lighting at the end of the sliding part | 1 | No | 110,000 | 110,000 |
| | | | | **Total** | 110,000 |

| | |
|---|---|
| **GST Pune** | 27AAECN0437H1ZM |

| | |
|---|---|
| **TOTAL BASIC AMOUNT** | **110,000** |

**General Prerequisites Required at Site**

1. Finished Flooring after curing (Without Water)
2. Electrical Supply on the site single phase/three phase points at different places.
3. Provide electrical cables near to the installation machinery
4. Fork lift/crane to be provided if required .
5. Scaffolding require for Installation it is in client scope.

**Limit of Supply**

1. Provide place to store the material to be installed .
2. Be responsible for the safe custody of all material.
3. Provide place to safely store all the tools of installation
4. Provide change & rest room for the workers.

**Quote/Supply is based on**

1. BOM is calculated as per standard quantity measurement
2. In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage will be to customer account.
3. Billing will be as per the supply of material ,not as per site measurements

**The supply included only those mentioned in the quote & does not include**

1. Unloading from truck placement on site
2. Electrical connection for control panel.

**Client Scope**

1. Once our project gets complete for any additional work to & fro loading &boarding of our service technicians is in client scope
2. Any civil / masonry/structural work required to support are in client scope
3. All structure support is in client scope
4. NIHVA Will provided structure drawing only if required
5. Exiting/Repair/ Modification/ Refurbishment charges will be extra.

**Terms and Conditions :**

| | | | |
|---|---|---|---|
| 1 | **Price** | : | Ex. Works Pune |
| 2 | **P & F Charges** | : | @3% of Total Supply Value |
| 3 | **Freight Notes** | : | Extra as applicable |
| 4 | **Delivery** | : | 8 - 9 weeks from the date of receipt of confirmed purchase order, Advance Payment, Drawing approval. |
| 5 | **Payment** | : | 80% Advance along with Confirmed Purchase Order and Balance before Dispatch. |
| 6 | **Insurance** | : | Extra As applicable |
| 7 | **Taxes** | : | GST @ 18% Extra as applicable |
| 9 | **Validity** | : | Validity of Offer is 15 days from the date of quotation |
| 10 | **Warranty** | : | 12 months from the date of supply. |

Please feel free to contact **Mr. Ravi Ranjan Prasad on 9881001752** For any further Clarification /Information in this concern.

With Best Regards

Ulka Auti
7219206333
For NIHVA Technologies Pvt Ltd