

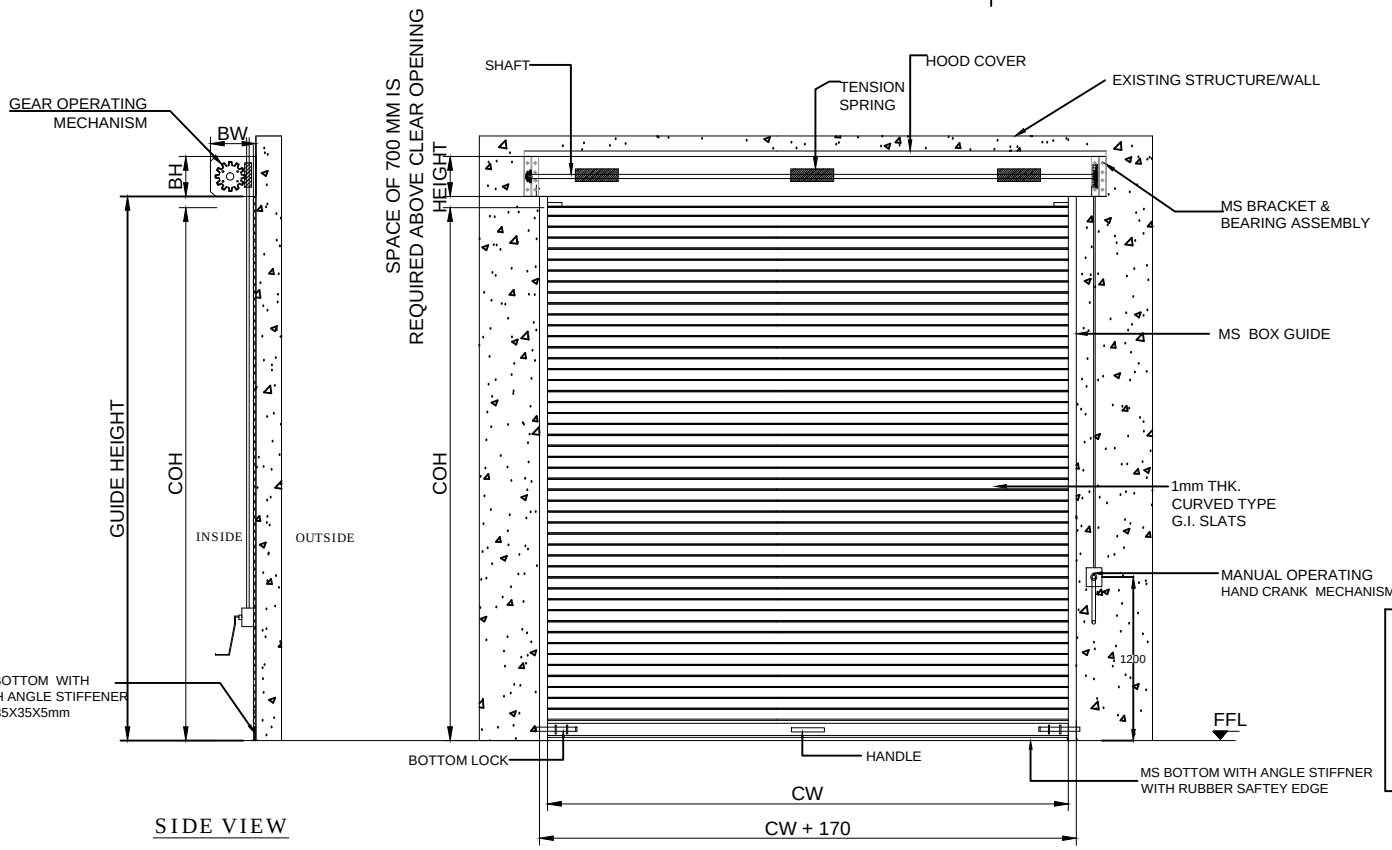


SIDE VIEW

INSIDE ELEVATION

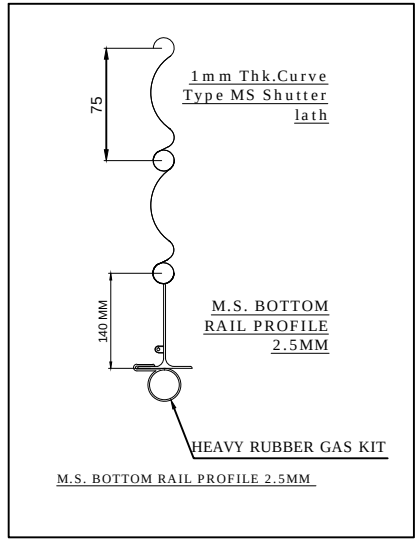

M.S. BOTTOM RAIL PROFILE 2.5MM

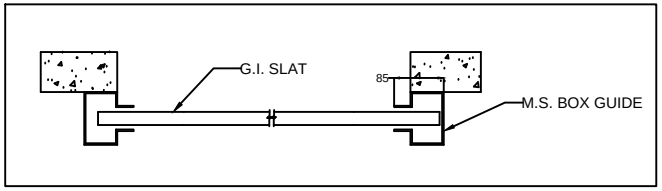



PLAN

RAL CODE	SHADE	COLOUR
RAL 9001	CREAM	
RAL 9002	GREY WHITE	
RAL 9010	PURE WHITE	
RAL 5002	ULTRAMARINE BLUE	
RAL 7035	LIGHT GREY	
RAL 7001	SILVER GREY	

NOTES-

1. IF REQUIRED M.S. STRUCTURE ,FITTING & ALL CIVIL WORK IS IN CLIENT SCOPE.
2. KINDLY REFER NIHVA STANDARD AVAILABLE ATTACHED RAL SHADE & CONFIRM RAL SHADE FOR POWDER COATING.INFORM IF OTHER ANY.
3. KINDLY CONFIRM INSTALLATION LOCATION , HAND CRANK SIDE (RH -STANDARD) , SURFACE MOUNTING SURFACE & INSIDE/OUTSIDE(INSIDE-STANDARD) .
4. FREE SPACE OF 700 MM IS REQUIRED ABOVE CLEAR OPENING HEIGHT .

TOLERANCE - ±10mm

SR NO	CLEAR OPENING WIDTH(CW)	CLEAR OPENING HEIGHT(CH)	QTY	LOCATION	HAND CRANK (RH/LH SEEN FROM INSIDE)	MOUNTING AREA (STANDARD-INSIDE)	RAL SHADE
1	3000	3500	2				

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE GI SLAT GEAR OPERATED ROLLING SHUTTER

	NAME	SIGN	DATE
DRAWN	S.M.S.		11.1.2021
CHECK	V.T.		11.1.2021
APPRD.			

NIHVA TECHNOLOGIES PVT. LTD.
Website:- www.nihva.com
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com

CLIENT - TRANS ENGG

PROJECT -

SITE LOCATION -

If any queries contact : design@nihva.com

DWG. NO. : NIHVA/20-21/0128 REV- R00

ALL DIMENSION ARE IN mm

SCALE: NTS WT: SHEET: 01 OF 01