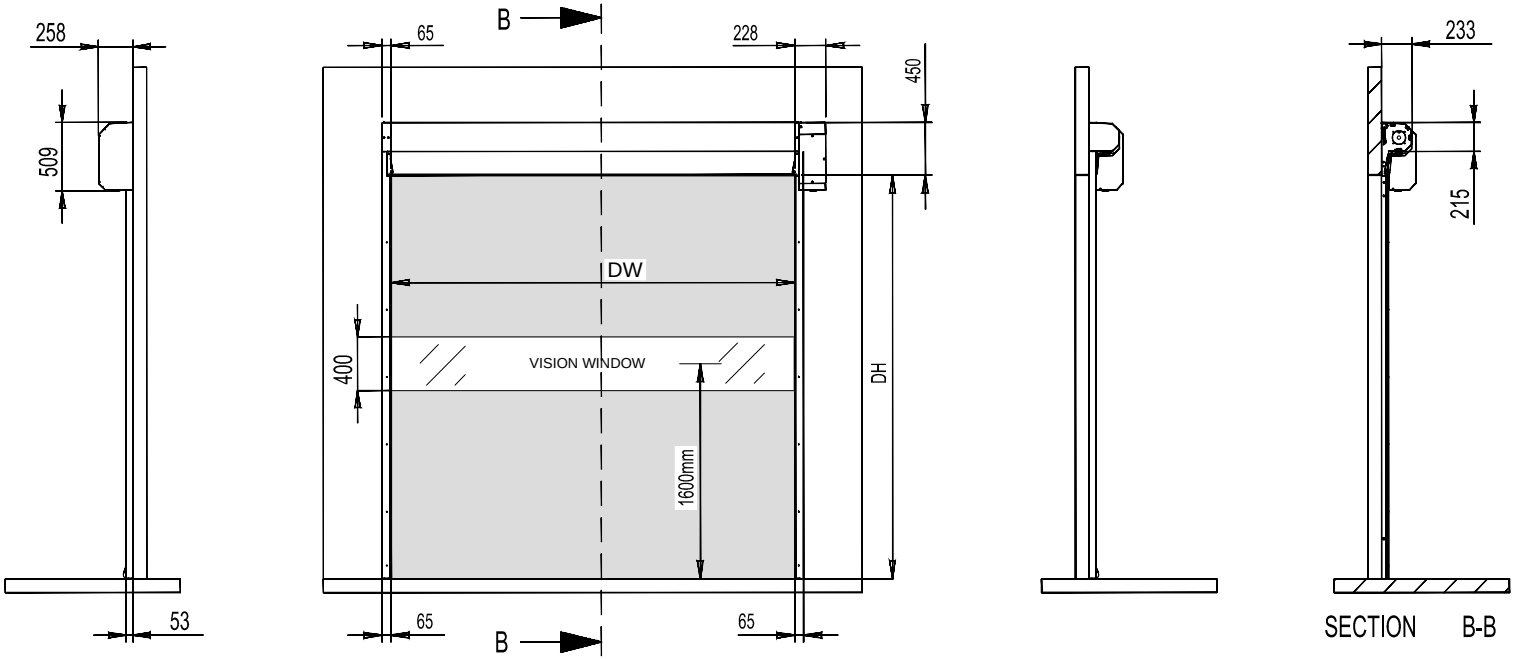


DOOR DIMENSION					
11	2420	3000	GROUND FLOOR	RIGHT HAND SIDE	01 NO
10	2420	3000	GROUND FLOOR	LEFT HAND SIDE	01 NO
9	2420	3000	GROUND FLOOR	RIGHT HAND SIDE	01 NO
8	2420	3000	2nd FLOOR	RIGHT HAND SIDE	01 NO
7	2420	3000	1st FLOOR	RIGHT HAND SIDE	01 NO
6	2420	3000	1st FLOOR	RIGHT HAND SIDE	01 NO
5	2420	3000	1st FLOOR	RIGHT HAND SIDE	01 NO
4	2420	3000	1st FLOOR	RIGHT HAND SIDE	01 NO
3	2420	3000	1st FLOOR	RIGHT HAND SIDE	01 NO
2	2420	3000	1st FLOOR	RIGHT HAND SIDE	01 NO
1	2420	3000	1st FLOOR	RIGHT HAND SIDE	01 NO
SR NO	DW	DH	DOOR LOCATION	MOTOR LOCATION	QUANTITY

Accessories/ Features considered-
1.Soft bottom safety edge.
2.Push buttons both side.
3.Both side loop detector.
4.Emergency Stop.
5.Safety catch
6.Flashing lights both side
7.Manual Hand Crank from One Side

Power Supply(Supply & UPS is in client's scope)

1. If motor is single phase then Single phase 230V, 50 Hz supply required. UPS Capacity- 2 KVA/ door
2. If motor is three phase then Three phase 430V, 50 Hz supply required. UPS Capacity- 3 KVA/ door

Door Curtain color- Grey (RAL 7035)

Note- All required civil work will be client's scope.

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: HIGH SPEED DOOR HS9020G

	NAME	SIGN	DATE
DRAWN	P.A		12.01.18
CHECK	V.T		12.01.18
APPROVAL			

If any queries contact : design@nihva.com

ALL DIMENSION ARE IN mm

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - DEV TECHNOSKILL

PROJECT - AMAR TEA PROJECT

SITE - UMARGAON, GUJARAT

DWG. NO. : NIHVA/18-19/0233 REV- 00

SCALE: NTS WT: SHEET: 01 OF 01