


NOTES -

1. A SUITABLE, SAFE, COVERED & SECURED STORAGE AREA TO STORE THE MATERIALS MUST BE ARRANGED BY YOU FOR SAFE STORAGE UNTIL INSTALLATION.
2. FOR OPERATOR MOUNTING ON SUPPORT STRUCTURE -NIHVA WILL FIX THE OPERATOR ON THE PROVIDED SUPPORT STRUCTURE USING SELF THREADING SCREWS AS PER THE MOUNTING DETAILS.
3. SUITABLE SUPPORT STRUCTURE TO BE PROVIDED FOR MOUNTING OF OPERATOR IN CLIENT SCOPE.
4. ALL ELECTRICAL WIRING, INCLUDING SUPPLY & INSTALLATION OF ELECTRICAL SOCKETS 230 VOLTS, 50-60 Hz, UNINTERRUPTED POWER AS REQUIRED FOR THE PROPER INSTALLATION & WORKING OF THE SYSTEM IS TO BE PROVIDED BY CLIENT.
5. ALL CIVIL WORKS, STRUCTURAL WORKS, FALSE CEILING, FLOORING, ETC. IS IN CLIENT SCOPE.

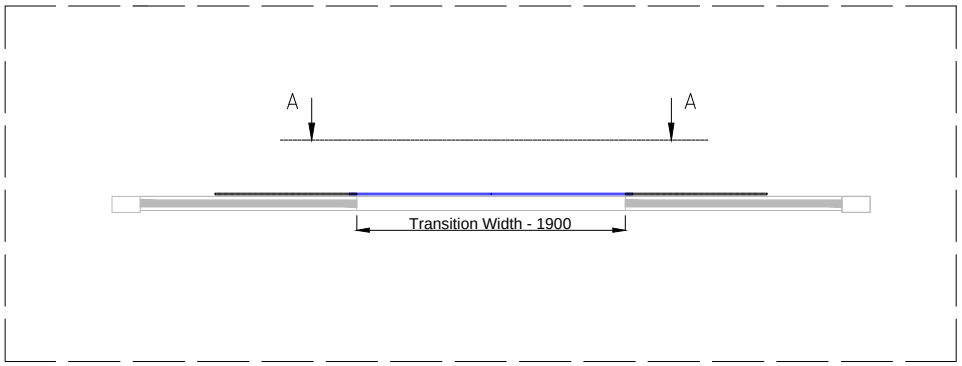

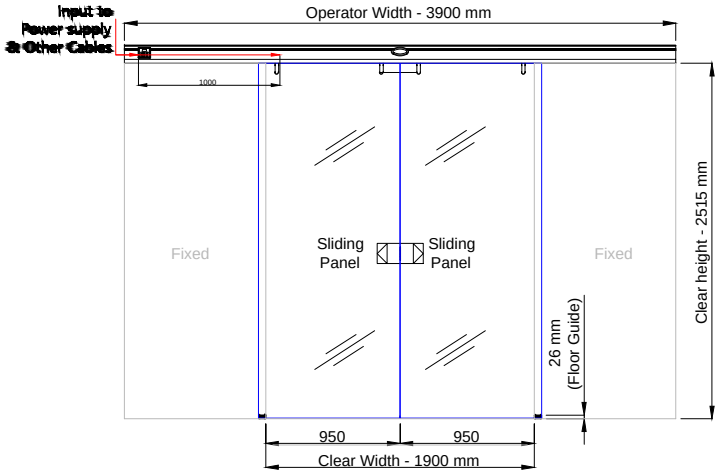

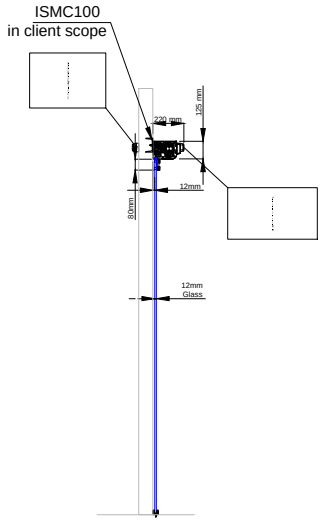

Elevational View A

SPECIFICATIONS
(1) Power - 170-260 V AC 50-60 Hz
(2) Weight Carrying capacity - 170kgs for Single leaf, 240kgs for Double leaf.

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE: AUTOMATIC SLIDING GLASS DOOR			NIHVA TECHNOLOGIES PVT. LTD. / NIHVA TECHNOLOGY PVT. LTD. PUNE
	SIGN	DATE	Website:- www.nihva.com / Tel : 020 66304033 / Email:- info@nihva.com
DRAWN SIDDHESHWAR		5.11.2020	CLIENT - SERUM INSTITUTE PUNE
CHECK ARJUN		5.11.2020	PROJECT - SERUM INSTITUTE PUNE
APPRD.			SITE -
ALL DIMENSION ARE IN mm			DWG. NO.-NIHVA/20-21/0078 / REV.- 0
If any queries contact :-projectsupport@nihva.com			SCALE: 01 / WT: / SHEET: 01 OF 01