


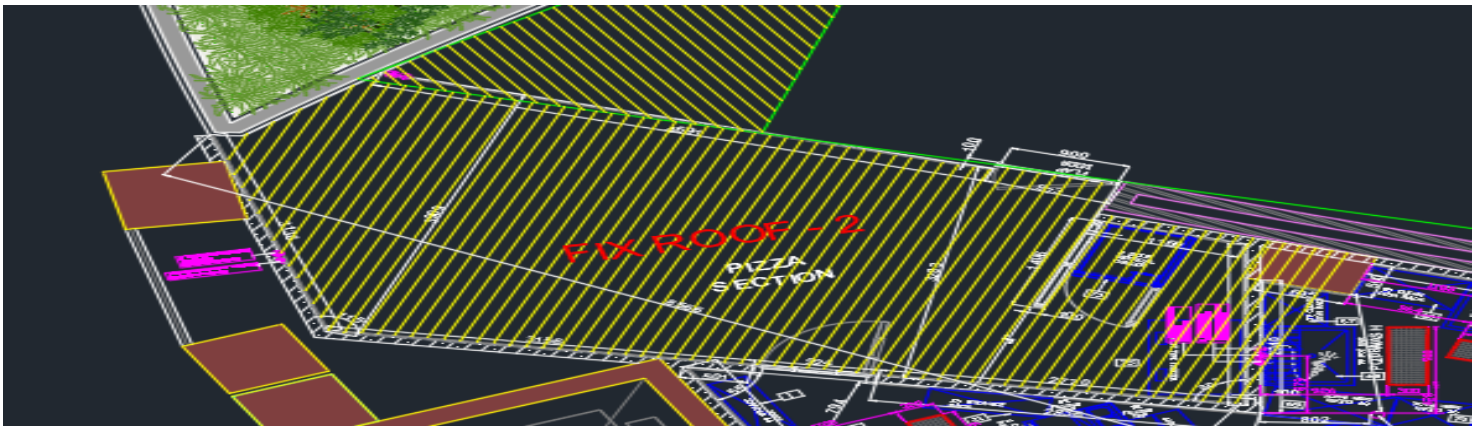


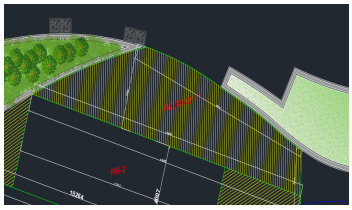

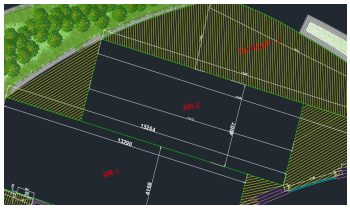

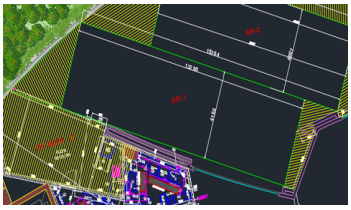

NIHVA
We Make possible

TÜVINDIA
TUV INDIA PVT. LTD.
ISO 9001
tuv-nord.com/in

NIHVA Technologies Pvt Ltd
Plot No. 187, 1st floor, G block, Thermax Chowk,
Above Kotak Bank, MIDC, Chinchwad,
Pimpri-Chinchwad, Pune, Maharashtra 411019

ISO 9001 Certified
GSTIN: 27AAECN0437H1ZM

TECHNO COMMERCIAL PROPOSAL

Company Name :	Mirah Hospitality	**Date :**	27-07-2026
Project, Location :	Pune	**Quote No :**	NTPL-RA-SL-TCO-26-27-0092
Subject :	Commercial Offer for Automatic Operated Retractable And Fix Roof	**Kind Attn :**	Shashank Mahadik
		Email Id :	shashank.mahadik@mirahhospitality.com
		Contact No :	9987777473

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions. This has reference to your above mentioned requirement, please find below our Solutions.

A) Commercial Proposal

Sr No	Description	Size (mm)	Qty	UOM	Tax %	Supply & Installation Charges in INR	
						Unit Price (₹)	Total Amount (₹)
1	**NIHVA Make-Automatic-Retractable Roof** NIHVA Make-Automatic-Retractable Roof-Polycarbonate Sheet • 'Motorised' Retractable Roof C SHAPE (W)4,168mm X (L)15,264mm X 8 Panel • Motorised' Retractable Roof C SHAPE (W)4,007mm X (L)15,452mm X 8 Panel • FIX Roof C SHAPE (W)3,593mm X (L)15,437mm X 1 FIX PANEL • FIX Roof C SHAPE - (W)3,909mm X (L)8,566mm X 1 FIX PANEL	(W)4,168mm X (L)15,264mm	1.0	Nos	18.0 %	13,700,000.00	13,700,000.00
Total (A)			**1.0**				**₹ 13,700,000.00**
P&F Charges on Supply only (B)			3.0%				₹ 411,000.00
Total Without Taxes (A+B)							**₹ 14,111,000.00**
Total GST							**₹ 2,539,980.00**
Total With Taxes							**₹ 16,650,980.00**
2	Transportation Charges		In Client Scope				
3	Unloading Charges @ Site		In-Client Scope				

Remarks :

B) Technical Specification

NIHVA Make-Automatic-Retractable Roof		
Sr. No.	**Specification**	**Description**
1	Profile	Powder coated AL Frame
2	Thickness	3mm solid Polycarbonate sheet
3	Track	MS
4	Interlocking	
5	Motor Mechanism with control panel	a) Remote operated b) Three Phase Motor c) Power- As per Roof Dimension d) Mechanical Limit Switch e) Rack and Pinion Arrangement
6	EPDM Gaskets and sealants	
7	SS Fastners	
8	Special NIHVA Make bearing housing	Bearing Housing Block

C) Terms & Conditions

1. **Price :** Ex Works Pune.
2. **Delivery :** 4 - 6 weeks from the date of receipt of confirmed Purchase Order, Advance Payment & Drawing Approva**l.**
3. **Payment :** 80% Advance along with Confirmed Purchase Order.
   10% After material Delivery at site.
   10% After Installation.

4**. Validity :** Validity of offer is 15 days from the date of quotation.

5**. Warranty :** 12 months from the date of supply. It only covers damage caused due to mechanical system not due to natural calamity.

6**. Design Clause :** NIHVA shall be deemed the authors of their respective concept and drawings with reserved rights, including copyrights. It shall not be used by the owner for future additions or alterations to this Project or for another project or should not copied at any other future project or should not transfer or copied by anyone.

7.**Compensation Clause :** Please note that in the event the buyer cancels an order, after the order is confirmed to us, it is binding to the buyer to pay NIHVA a compensation of 25% of order value.

D) General Conditions

1. Continuous uninterrupted access to installation section or as agreed seperately.
2. Provision of 230 V power supply for hand tools.
3. A dry and secure area, not in direct sunlight is to be provided for storage of product component
4. Access to site between 7 am to 8 pm should be provided.
5. Any storage costs for material due to delay outside of NIHVA, will be in client scope.
6. The project time indicated does not take into account adverse weather conditions that may prevent safe and efficient working practice. We reserve the right to extend the period accordingly.
7. Installation will start after receiving of Site Readiness Photographs or written Email communication.
8. We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readiness Confirmation.
9. For any reason if we need to stop our installation and demobilize the team without completing the work, then extra cost will be applicable for Remobilizing the Team.
10. If any change in dimension on actual site, quoted price will affect accordingly which will be in client scope.
11. After 1 year warranty, Non comprehensive AMC will be provided by NIHVA at an additional cost.

Note: Please find below List which are in Client Scope

Sr. No	Description
1	Secured and fully covered Store area to keep the material.
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site.
3	Electrical Supply on the site single phase/three phase points at different places.
4	Any civil / masonry/structural work required.
5	All structure support required.
6	In Case of any changes in the layout as per site requirements after the shipment of material, the additional quantities and wastage.

Sr. No	Description
7	Conduits, Cables required

Please feel free to Contact for any further Clarification / Information in this Concern.

With Best Regards,

For NIHVA Technologies Pvt Ltd

Kalpana Pathare

Authorized Signatory

Note: This quotation is valid for 15 days from the date of issue.