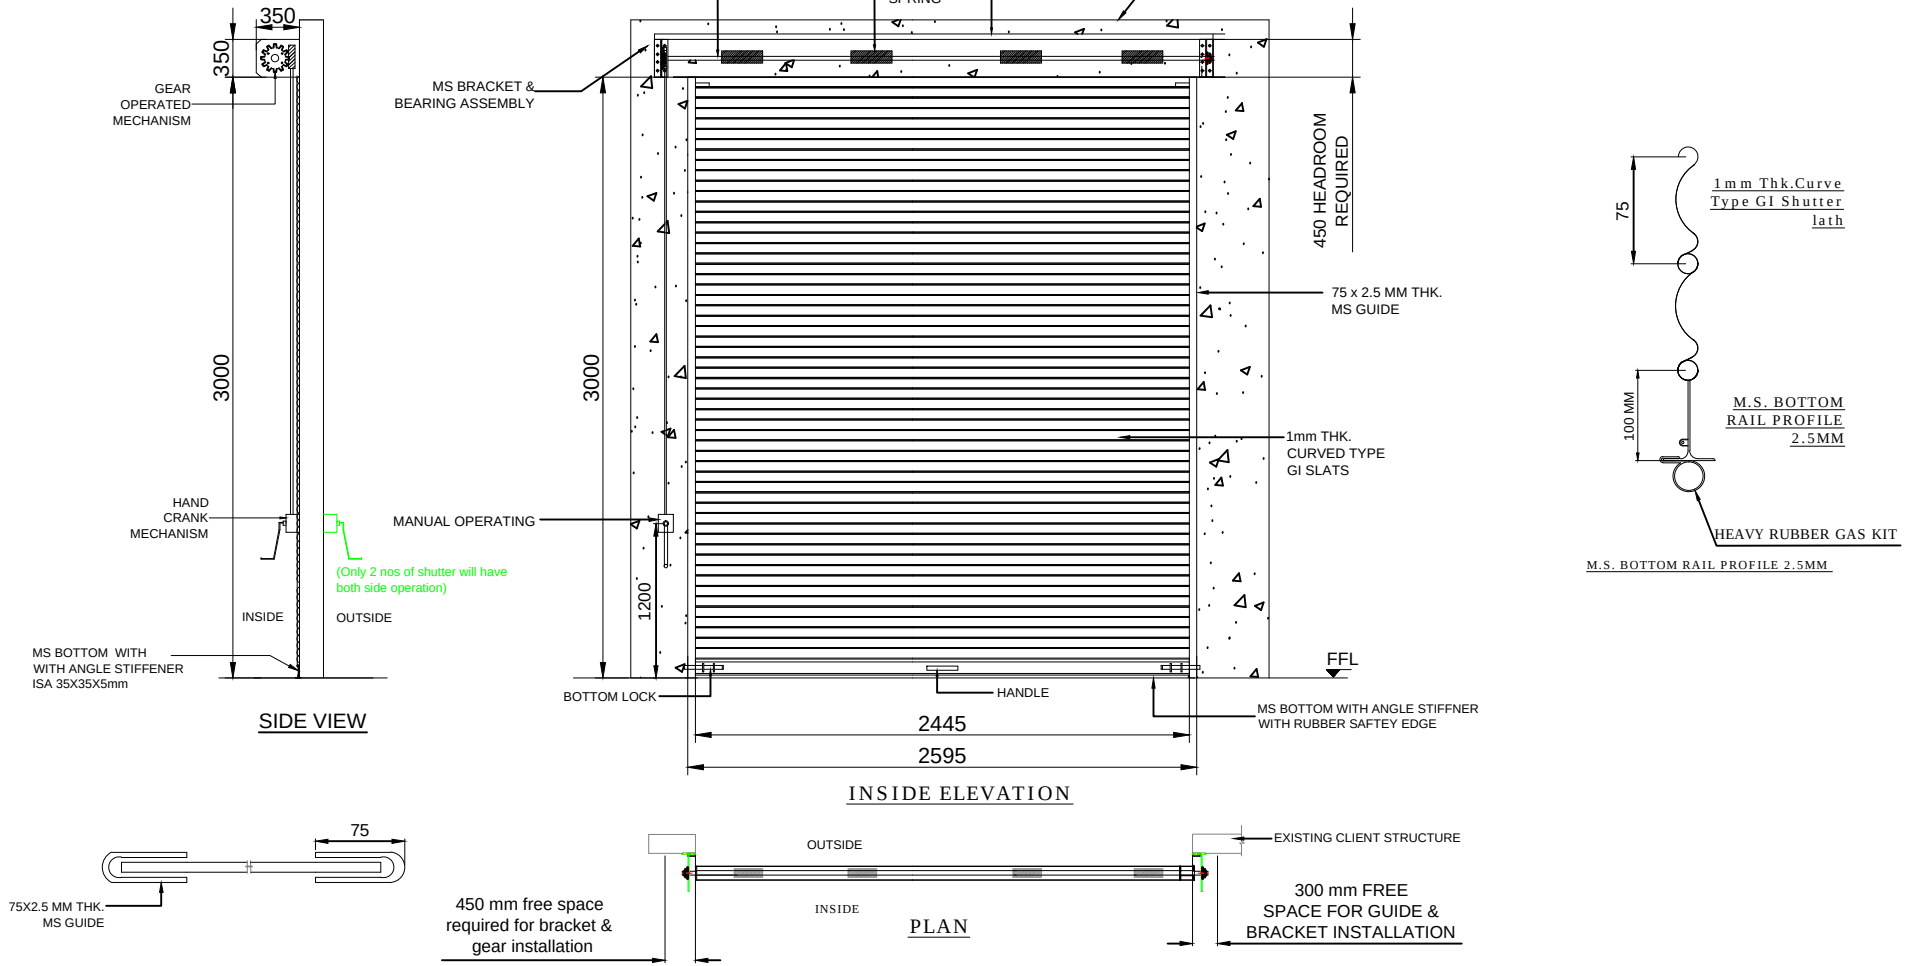



| S.N. | LOCATION | SIZE | QUANTITY- Left side gearbox |
|---|---|---|---|
| 1 | B400 | 2445(W)X3000(H) | 07 |
| 2 | B500 | 2445(W)X3000(H) | 06 (1 nos shutter will have both side operation) |
| 3 | B600 | 2445(W)X3000(H) | 05 (1 nos shutter will have both side operation) |
| TOTAL QTY. OF SHUTTER | | | 18 |

NOTE-
1. ALL CIVIL WORK WILL BE CLIENT'S SCOPE.
2.STRUCTURE REQUIRED FOR SHUTTER IS IN CLIENT'S SCOPE.
3.FINAL FINISH OF SHUTTER WILL BE IN POWDER COATING OF APPROVED COLOR i.e.RAL 7001.

TOLERANCE - ±10mm

REV:-28-04-2018 .01.Changed hand crank mechanism location.

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE: GEAR OPERATED ROLLING SHUTTER 2.445mX3m With Left side gearbox

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

| | NAME | SIGN | DATE |
|---|---|---|---|
| DRAWN | OMKAR | | 28-04-2018 |
| CHECK | PRADEEP | | 28-04-2018 |
| APPRD. | PRADEEP | | 28-04-2018 |

CLIENT - INDOSPACE
PROJECT - BUILDING B500 & B600
SITE LOCATION - CHAKAN 3
If any queries contact : design@nihva.com
DWG. NO. : NIHVA/18-19/0015/1
REV- 0
ALL DIMENSION ARE IN mm
SCALE: NTS
WT:
SHEET: 01 OF 01