


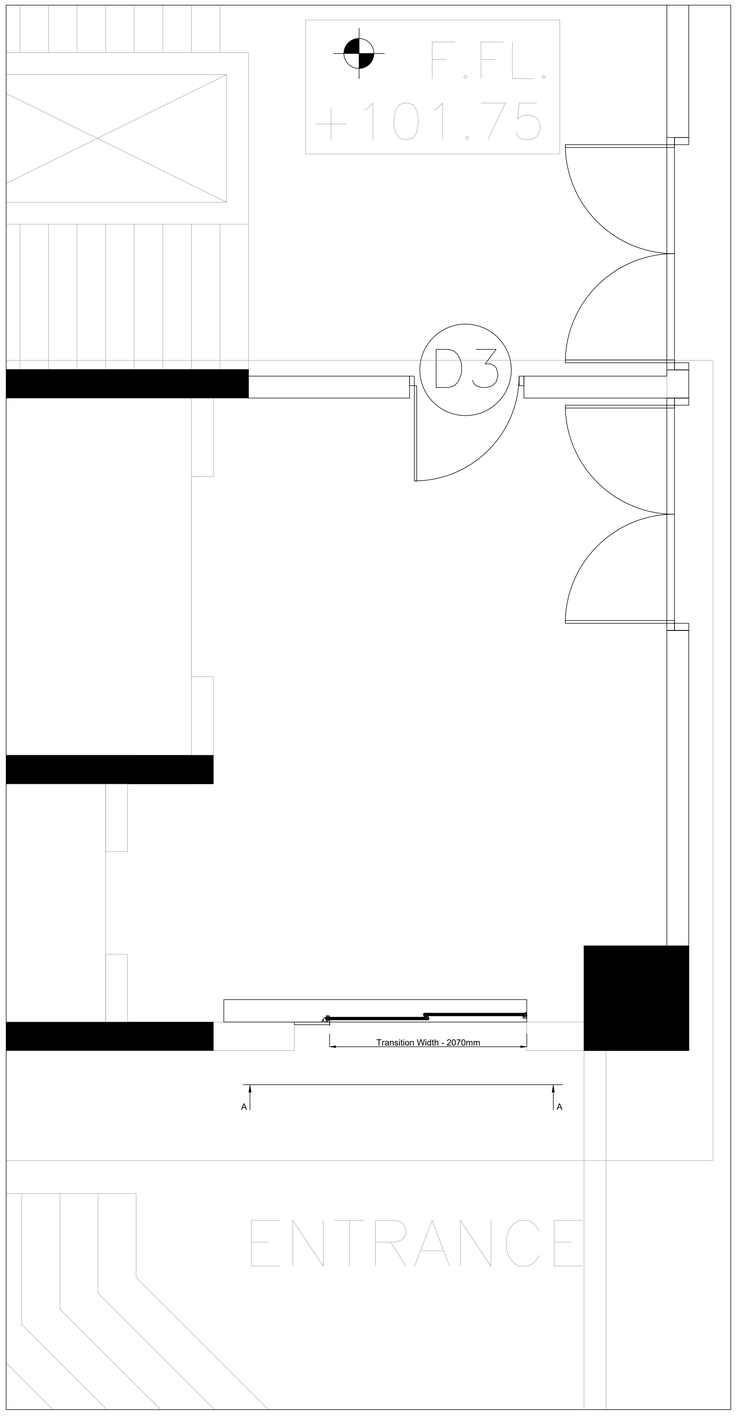


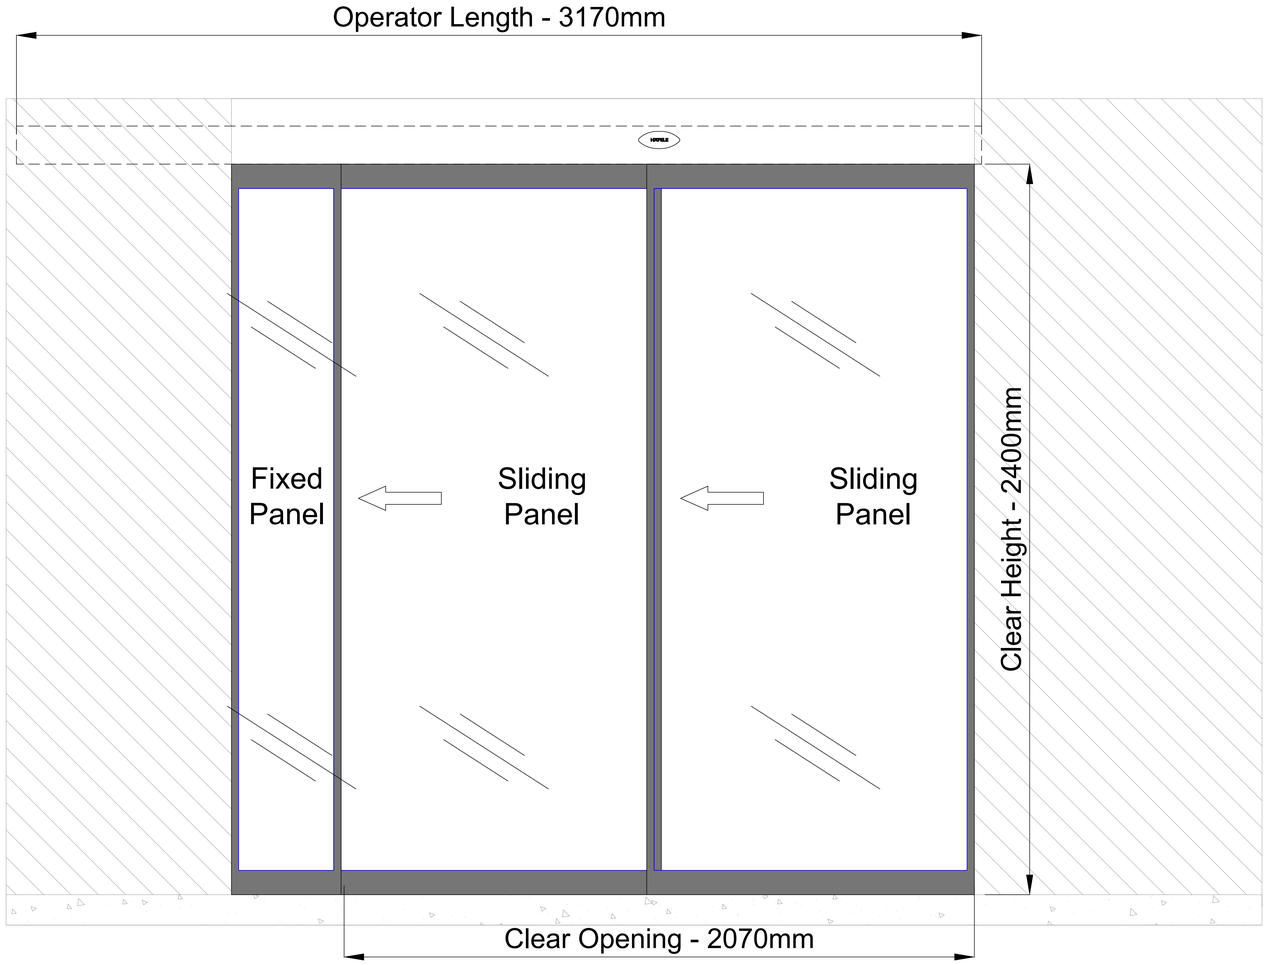

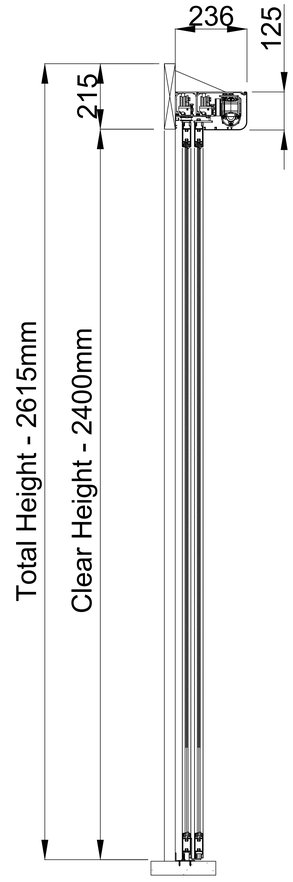

VIEW A - A (From Outside)

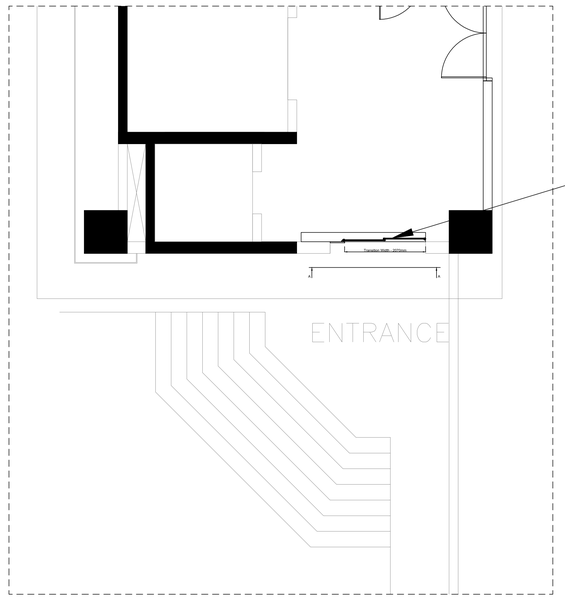

Preliminary drawing
only for offer purposes.
No rights can be claimed from this drawing.

SPECIFICATIONS

1. Power - 170-260 V AC 50-60 Hz
2. Weight Carrying capacity - 170kgs for Single leaf,
   240kgs for Double leaf.

DRAWING APPROVED SUBJECT TO BELOW MENTIONED TERMS & CONDITIONS

TERM & CONDITIONS:

1. INSTALLATION WORKS WOULD BE STARTED IN 2 WEEKS FROM THE DATE OF PAYMENTS RECEIVED.
2. A SUITABLE, SAFE, COVERED & SECURED STORAGE AREA TO STORE THE MATERIALS MUST BE ARRANGED BY YOU FOR SAFE STORAGE UNTIL INSTALLATION.
3. PLEASE CHECK QUANTITY OF MATERIALS AGAINST PACKING LIST AND NOTIFY ANY MISSING ITEMS AND WE ARE NOT RESPONSIBLE FOR ANY MISSING ITEMS LATER.
6. FOR OPERATOR MOUNTING ON GLASS - GLASS TO BE PROVIDED WITH HOLES AS PER MOUNTED DETAILS.
7. FOR OPERATOR MOUNTING ON SUPPORT STRUCTURE - HAFELE WILL FIX THE OPERATOR ON THE PROVIDED SUPPORT STRUCTURE USING SELF THREADING SCREWS AS PER THE MOUNTING DETAILS.
8. SUITABLE SUPPORT STRUCTURE TO BE PROVIDED FOR MOUNTING OF OPERATOR, ACCESSORIES.
9. PROVIDED SUPPORT STRUCTURE SHOULD WITHSTAND THE STATIC & DYNAMIC LOAD OF OPERATOR, ACCESSORIES & SLIDING DOORS. (OPERATOR WEIGHT - ±50KGS, GLASS WEIGHT - AS PER SIZE)
10. ALL ELECTRICAL WIRING, INCLUDING SUPPLY & INSTALLATION OF ELECTRICAL SOCKETS 230 VOLTS, 50-60 Hz, UNINTERRUPTED POWER AS REQUIRED FOR THE PROPER INSTALLATION & WORKING OF THE SYSTEM IS TO BE PROVIDED BY OTHERS.
11. ALL CIVIL WORKS, STRUCTURAL WORKS, FALSE CEILING, FLOORING, ETC. IS NOT INCLUDED IN HAFELE SCOPE OF WORK.
12. ALL NECESSARY SCAFFOLDING, CRANEAGE, FREE & UNINTERRUPTED ACCESS TO SITE & STORAGE ETC. TO BE PROVIDED BY YOU.

Project:	SERUM INSTITUTE		
Location:	PUNE		
Product:	Autotec - Telescope Sliding System		
Wall type:	Telescope	Frame: Yes	
Track type:	2C	Profiles finish: Natural Anodized	
Ceiling support:	Yes, standard	dB-value: - dB (Rw,P)	
Treatment:	Alu. naturel	Fire safety No	
Trackstrips:	B8	Operating : Automatic	
Further hardware	No	Element/numbers: (NO)	
Extra information:			

HÄFELE SLIDO

Drawing number: HAS-TS-0001
Date: 10.11.2020
Scale: 1: 25 / 1:8
Format: A3
Drawn: RC Checked:

All dimensions must be checked and verified on site before commencing any work. All the sizes on the this drawing are from track centre, unless clearly specified otherwise. Opening height is from top of finished floor to underside of track. This drawing is copyright and remains the property of Parthos. Once this drawing is approved and signed by the principal or his agent, we are unable to make any alterations. Responsibility for constructional provisions remains with the architect and/or principal.

HAS-TS-0001