NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

SCON Projects Pvt. Ltd
Samarth House,S.NO.116, Hissa No.3/1, 3/3,3/10,
Pune- Bangalore Highway, Near Shell petrol Pump,
Warje, Pune- 411058

Date : 13.03.2020
Quote NO : SQT/19-20/2495
Kind Attn : Mr. Kamlesh Bhagade.
Email Id : kamleshb@sconprojects.com
Contact No: 8308809561

Subject : Quotation for Rolling Shutter.(Project - Gestamp, Chakan.)

Dear Sir,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.
This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2
C.	General Conditions	3
D.	Terms & Condtions	3

A) Commercial Offer

Sr No	Description	Size		Qty	Supply Charges in INR		Installation Charges in INR	
		Clear Width (mm)	Clear Height (mm)	(Nos)	Unit Price	Total Amount	Unit Price	Total Amount
1	**Double Wall Motorised Rolling Shutter**	5500	5500	4	505,000	2,020,000	20,000	80,000
				Total		**2,020,000**		**80,000**
2	P&F Charges			3%		60,600		
	Total Without Taxes					2,080,600		80,000
	GST Extra @ 18%			18%		374,508.00		14,400
	Total With Taxes					**2,455,108**		**94,400**
5	Transportation Charges					In Client Scope		
6	Unloading Charges @ Site					In Client Scope		

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019


An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) Technical Specification

Double Wall Motorised Rolling Shutter (NIHVA Make)



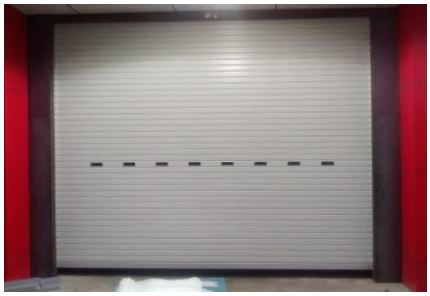

Sr. No.	Description	Specification
1	**Curtain**	Made of double skinned galvanised steel laths with PUF Insulation
2	**Hood Cover**	Pressed galvanised steel hood & motor cover with two coats of Polyurethane
3	**Drive Type**	Direct DRIVE
4	**GI Slat**	19mm Thick
5	**Profile**	Curved Type Profile with heavy duty Shaft
6	**Guide**	2.5 mm Thick MS Guide
7	**Hood Cover & Motor Cover**	0.9 mm Thick GI material

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

C) General Conditions

1 Installation will start after receiving of Site Readyness Photographs or written Email communication.

2 We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readyness Confirmation

3 For any reason if we need to stop our Installation and demobilize the Team without completing the Work, then extra cost will be applicable for Remobilizing the Team.

4 If Lifting Equipements are in NIHVA Scope, then those will be used for Installation purpose only and not for any other works.

Note: Please find below List which are in Client Scope

Sr. No	Description	Remark
1	Secured and fully covered Store area to keep the material	In Client Scope
2	Scaffolding/Hydra/Crane/Forklift Etc - Required for Installation at Site	In Client Scope
3	Electrical Supply on the site single phase/three phase points at different places.	In Client Scope
4	Any civil / masonry/structural work required	In Client Scope
5	All structure support required	In Client Scope
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.	In Client Scope
7	Conduits, Cables required	In Client Scope

D) Terms & Conditions

Price : Ex Works Pune

Delivery : 5 - 6 weeks from the date of receipt of confirmed purchase order, Advance Payment & Drawing approval.

Payment : 80% Advance along with Confirmed Purchase Order & Balance before dispatch.

Validity : Validity of Offer is 15 days from the date of quotation

Warranty : 12 months from the date of supply.

Please feel free to Contact **Mr. Arjun Patil on 8551096333** For any further Clarification /Information in this Concern.

With Best Regards
Ulka Auti
7219206333
For NIHVA Technologies Pvt Ltd