

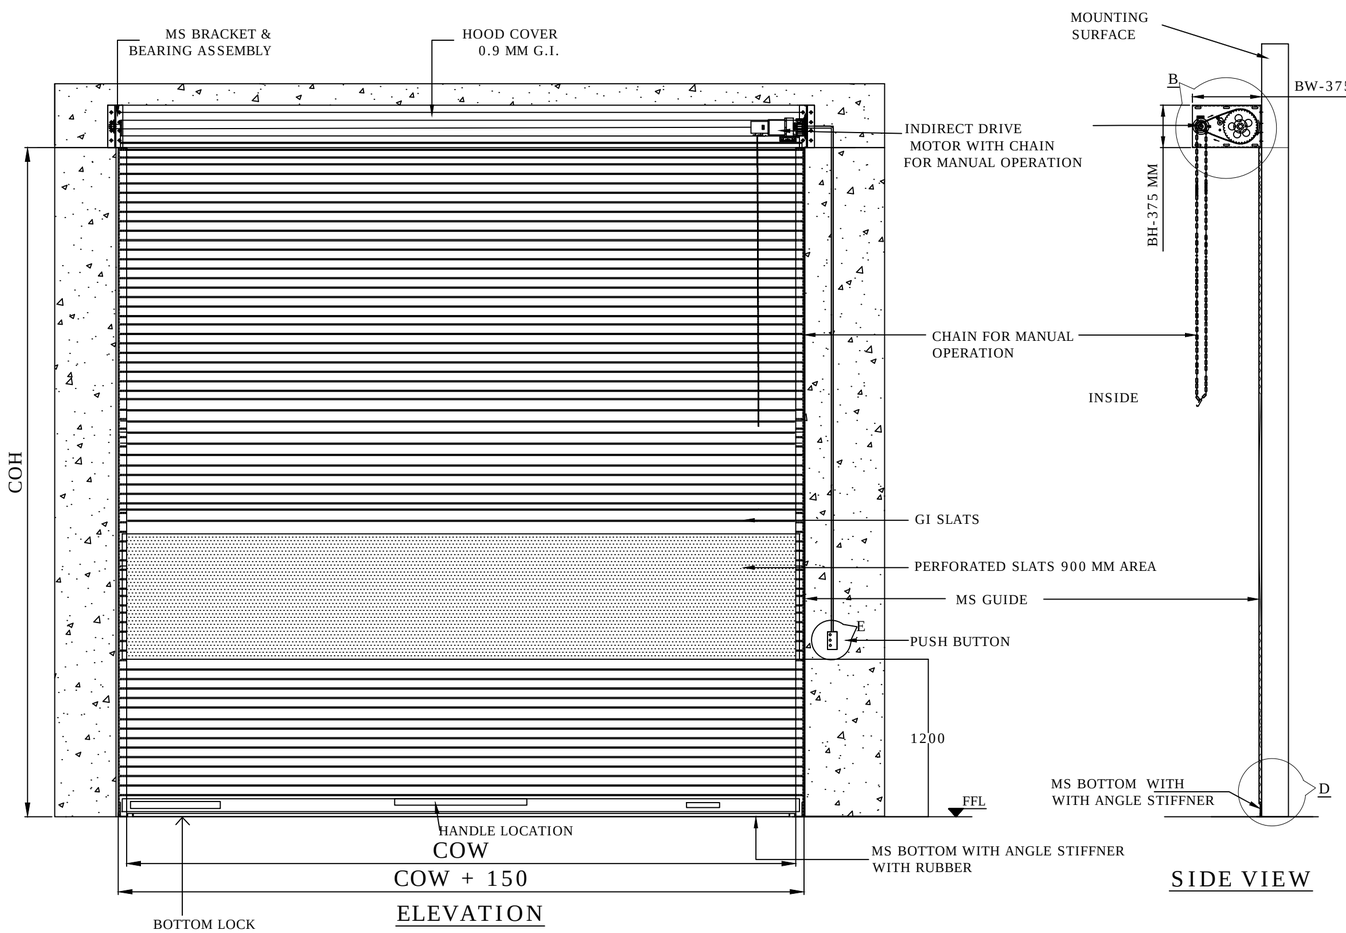


ELEVATION

SIDE VIEW

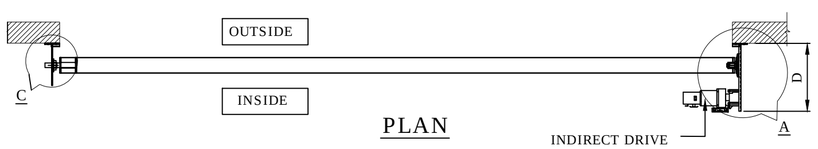

PLAN

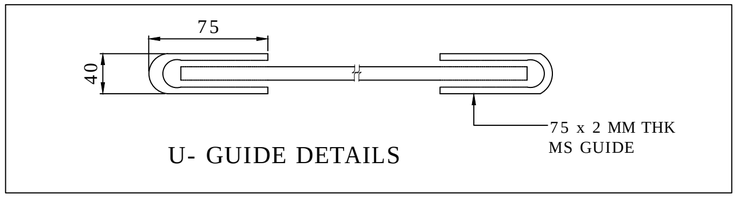


U- GUIDE DETAILS


RAL CODE	SHADE	COLOUR
RAL 9001	CREAM	
RAL 9002	GREY WHITE	
RAL 9010	PURE WHITE	
RAL 5002	ULTRAMARINE BLUE	
RAL 7035	LIGHT GREY	
RAL 7001	SILVER GREY	

NOTES-


1. REFER ABOVE RAL SHADE CHART & CONFIRM RAL SHADE FOR PAINTING .(IF ANY OTHER , KINDLY INFORM TO NIHVA).
2. CONFIRM MOUNTING OF ROLLING SHUTTER IS ON CONCRETE WALL OR STRUCTURE .
3. IF REQUIRED ALL CIVIL WORK , STRUCTURE & ITS FITTING IS IN CLIENT SCOPE .
4. SPACE OF 550 MM IS REQUIRED ABOVE CLEAR OPENING HEIGHT FOR INSTALLATION OF SHUTTER 6000X5000.
5. CLEAR OPENING HEIGHT AFTER SHUTTER INSTALLATION WILL BE 150 MM LESS THAN WALL OPENING HEIGHT .

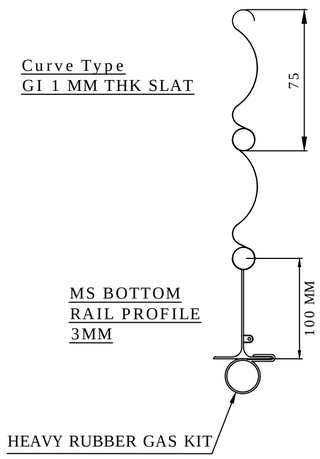

DETAILS : D

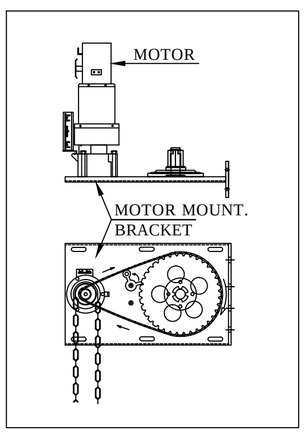

DETAILS : A & B

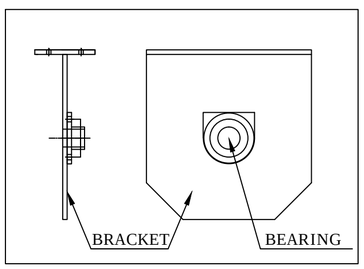

DETAILS : C

1	6000	5000		
SR NO	CLEAR OPENING WIDTH (COW)	CLEAR OPENING HEIGHT (COH)	QUANTITY	RAL COLOR FOR PAINTING

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE GI PERFORATED MOTORIZED ROLLING SHUTTER 6000X5000

	NAME	SIGN	DATE
DRAWN	G.I.P.		5.8.2021
CHECK	A.K.		5.8.2021
APPRD.			

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGIES PVT. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - AKSHAYA AGRI

PROJECT -

SITE LOCATION -

If any queries contact :design@nihva.com

DWG. NO. : NIHVA/20-21/199

REV- R00

ALL DIMENSION ARE IN mm

SCALE: NTS

WT:

SHEET: