NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

Galaxy City
Guwahati

Date : 16.08.2024
Quote NO : RR_24.25.0106R
Kind Attn : Mr.Manoj Kayal
manoj.kayal@galaxycity.life,
Email Id : manojkayal15@gmail.com
Contact No: 9435030401, 7002181838

Project Name & Location: Galaxy city , Guwahati

Subject : Commercial Offer for Automatic Retractable Roof


Dear Sir/Ma'am,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.
This has reference to your above mentioned requirement, please find below our Solutions.


Sr. No	Description	Pages
A.	Commercial Offer	1
B.	Technical Specification	2
C.	General Conditions	2
D.	Terms & Condtions	2

A) Commercial Offer

Sr No	Description	Size	Qty	Supply & Installation Charges in INR	
		(In meter)	(Nos)	Unit Rate	Total in RS
1	**Automatic Retractable Roof (divided in 2 parts)**	• 10.8m(W) X 28.2m(L) • 10 Panels • Centre Opening	2	₹ 1,05,00,000	₹ 2,10,00,000
2	**Installation**	Inclusive	2 nos above Roof		₹ 0
3		**Total without Taxes**			**₹ 2,10,00,000**
4		GST Extra @ 18%	18%		**Extra At Actual**
5		P&F Charges @ 3%	3%		**Extra At Actual**
6		Transportation Charges			**In Client Scope**
7		Unloading Charges @ Site			**In Client Scope**
8		Support Structure for Track mounting and Man (Horizontal and vertical)			**In Client Scope**
9		LED Lighting			**Inclusive**

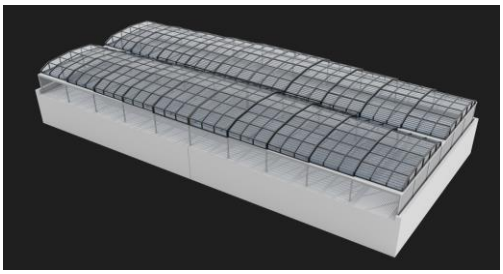

Close View

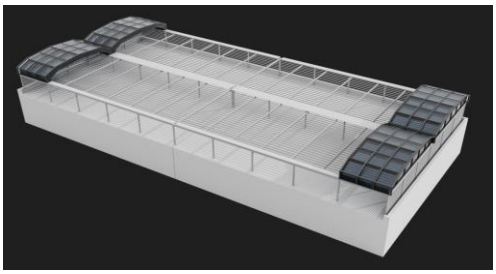

Open View

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC, Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) **Technical Specification**

1. Polycarbonate 5mm thick solid Compact Clear/Embossed (10 years warranty) + 50 Micron UV Coating
2. Profile : Powder Coated AL Frame ,Grade 6063T5
3. Guide : AL Guide
4. Interlocking
5. Motor Mechanism with control panel a) Push button/Remote Controlled b) Single Phase Bi-directional Motor c) Power- As per Roof Dimension d) Mechanical Limit Switch e) Rack and Pinion Arrangement
6. EPDM Gaskets and sealants
7. SS 304 Fastners
8.Wind Pressure- 150km/Hr
9.Motor- Run 2500kg , Make -NICE

C) **General Conditions**

1	Continuous uninterrupted access to installation section or as agreed seperately.
2	Provision of 230 V power supply for hand tools.
3	A dry and secure area, not in direct sunlight is to be provided for storage of product component
4	Access to site between 7 am to 8 pm should be provided.
5	Any storage costs for material due to delay outside of NIHVA, will be in client scope.
6	The project time indicated does not take into account adverse weather conditions that may prevent safe and efficient working practice. We reserve the right to extend the period accordingly.
7	Installation will start after receiving of Site Readiness Photographs or written Email communication.
8	We will mobilize the Installation Team in 3 - 4 working days, after reciept of Site Readiness Confirmation.
9	For any reason if we need to stop our installation and demobilize the team without completing the work, then extra cost will be applicable for Remobilizing the Team.
10	If any change in dimension on actual site, quoted price will affect accordingly which will be in client scope.
11	After 1 year warranty, Non comprehensive AMC will be provided by NIHVA at an additional cost.
12	No product return policy applicable for customized products, if you cancelled order during the Manufacturing stage or after arrived at site.

Note: **Please find below List which are in Client Scope**

Sr. No		Remark
1	Secured and fully covered Store area to keep the material.	In Client Scope
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site to lift the material and man	In Client Scope
3	Electrical Supply on the site single phase/three phase points at different places.	In Client Scope
4	Any civil / masonry/structural work required.	In Client Scope
5	All structure support required.	In Client Scope
6	In Case of any changes in the layout as per site requirements after the shipment of material, the additional quantities and wastage.	In Client Scope
7	Conduits, Cables required	In Client Scope

D) **Terms & Conditions**

Price :	Ex Works Pune.
Delivery :	16- 18 weeks from the date of receipt of confirmed Purchase Order, Advance Payment & Drawing Approval.
Payment :	70% Advance along with Confirmed Purchase Order. 20% After material Delivery at site. 10 % After Commissioning
Validity :	Validity of offer is 15 days from the date of quotation.
Warranty :	12 months for motor, control panel and electrical items and 10 years for Aluminium frames from the date of supply. It only covers damage caused due to mechanical system not due to natural calamity.
Design Clause :	NIHVA shall be deemed the authors of their respective concept and drawings with reserved rights, including copyrights. It shall not be used by the owner for future additions or alterations to this Project or for another project or should not copied at any other future project or should not transfer or copied by anyone.
Compensation Clause	Please note that in the event the buyer cancels an order, after the order is confirmed to us, it is binding to the buyer to pay NIHVA a compensation of 25% of order value.

With Best Regards

Mr.Pranav T. Marne

7758820333
NIHVA Technologies Pvt Ltd