
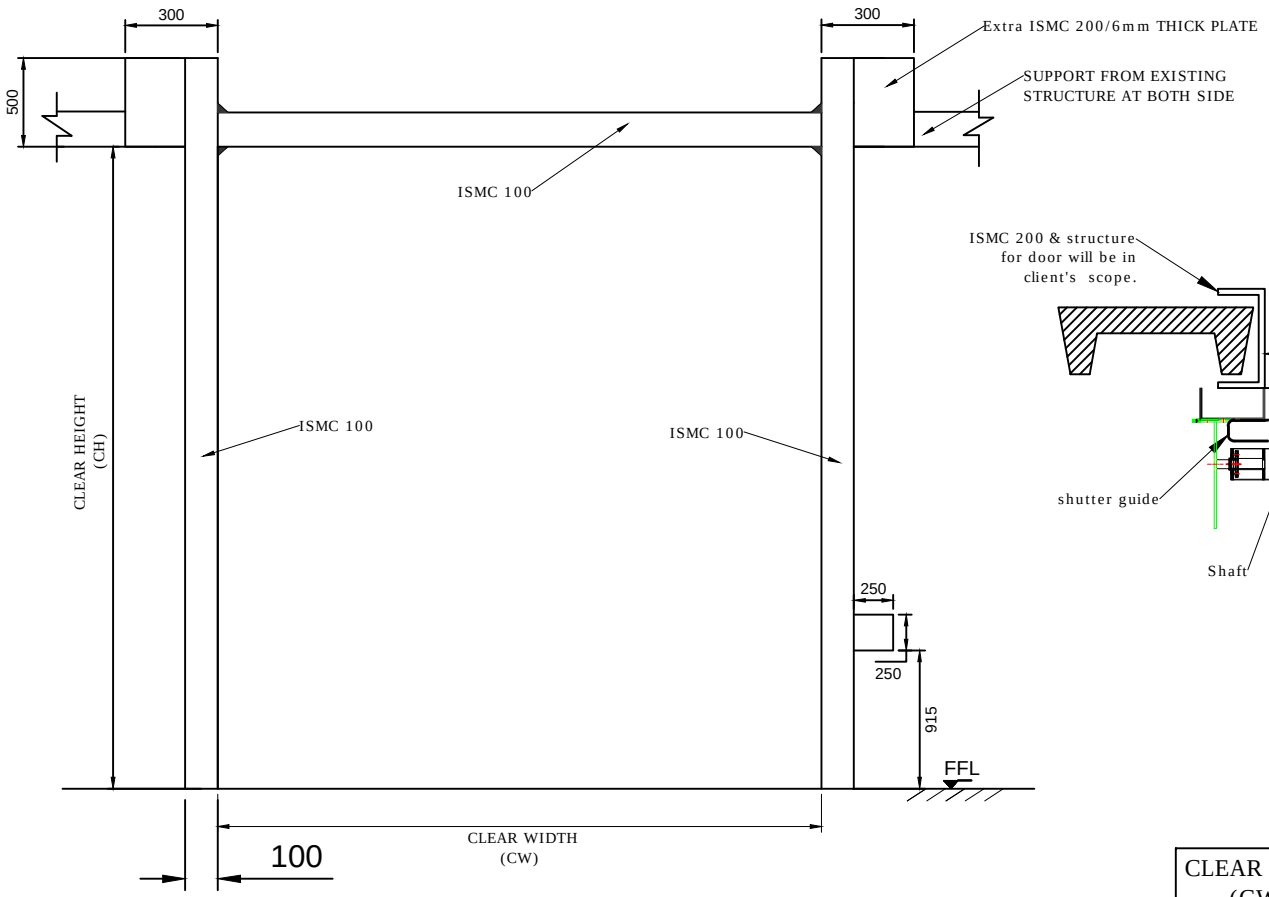


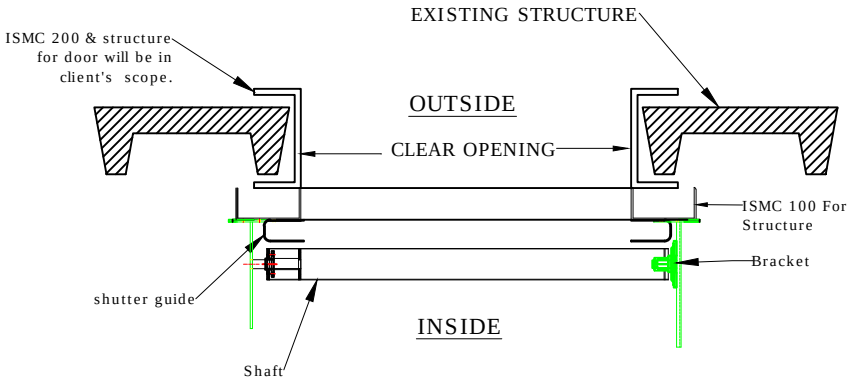

DETAIL VIEW A

CLEAR WIDTH (CW)	CLEAR HEIGHT (CH)	QUANTITY
2451	3033	11
3000	3033	2

(NOTE: REQUIRED STRUCTURE FOR DOOR SHOULD BE IN CLIENT SCOPE.)

structure should bear approx. 1000 k.g. weight. (wind pressure included). While Door is in operation, structure should not vibrate and bear/sustain all movements of rolling shutter.

This drawing & designing is the property of NIHVA TECHNOLOGIES. Not be sold or copy to any other concern.

TITLE

STRUCTURE FOR GEAR OPERATED ROLLING SHUTTER

CLIENT APPROVAL

ALL DIMENSION ARE IN mm

	NAME	DATE	SIGN.
DRAWN	OMKAR	11/02/16	
CHECK	ANIL	11/02/16	
APPRD.			
REV			
MFG			
Ref. No.			

NIHVA TECHNOLOGIES PVT. LTD.
NIHVA TECHNOLOGY PVT. LTD. PUNE
Tel : 020 66304033
Email:- info@nihva.com
Website:- www.nihva.com

CLIENT - INDOSPACE

PROJECT- APM BUILDING

SITE - CHAKAN

DWG. NO. - NIHVA/15-16/169

SCALE: 01 | WT: | SHEET: 01

If any queries contact : projects@nihva.com