NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

PROJECT PROPOSAL

NIHVA TECHNOLOGIES PVT. LTD.

187, G-Block, Thermax chowk, Above Renault Showroom, MIDC
Chinchwad, Pune – 411019.

Customer Name	**Minda Industries Ltd**
Project Name	**SIDE STAND SENSING SWITCH BATCHING & PACKING LINE**
Project Location	UNO, Pune
Contact Person Name	Mr. Manish Gupta
Email Id	guptam@mindagroup.com
Contact Number	+91-7410049522

For Technical: -

Contact Person: Mr. Shailendra Saindane
Mob No.: +91-7709209333 / 9168423687
Email id: automation@nihva.com
Web: http://www.nihva.com

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Project Title: SIDE STAND SENSING SWITCH BATCHING & PACKING LINE

Date: 04/12/2018


Quotation No. SQT/18-19/1005

Dear Sir,

Thank you for the opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions. This has reference to your above-mentioned requirements as well as our subsequent communication; please find below our best offer.

A. Requirement:
Packing of chili powder pouches of different sizes. Require process is as below.

Process Flow Chart:

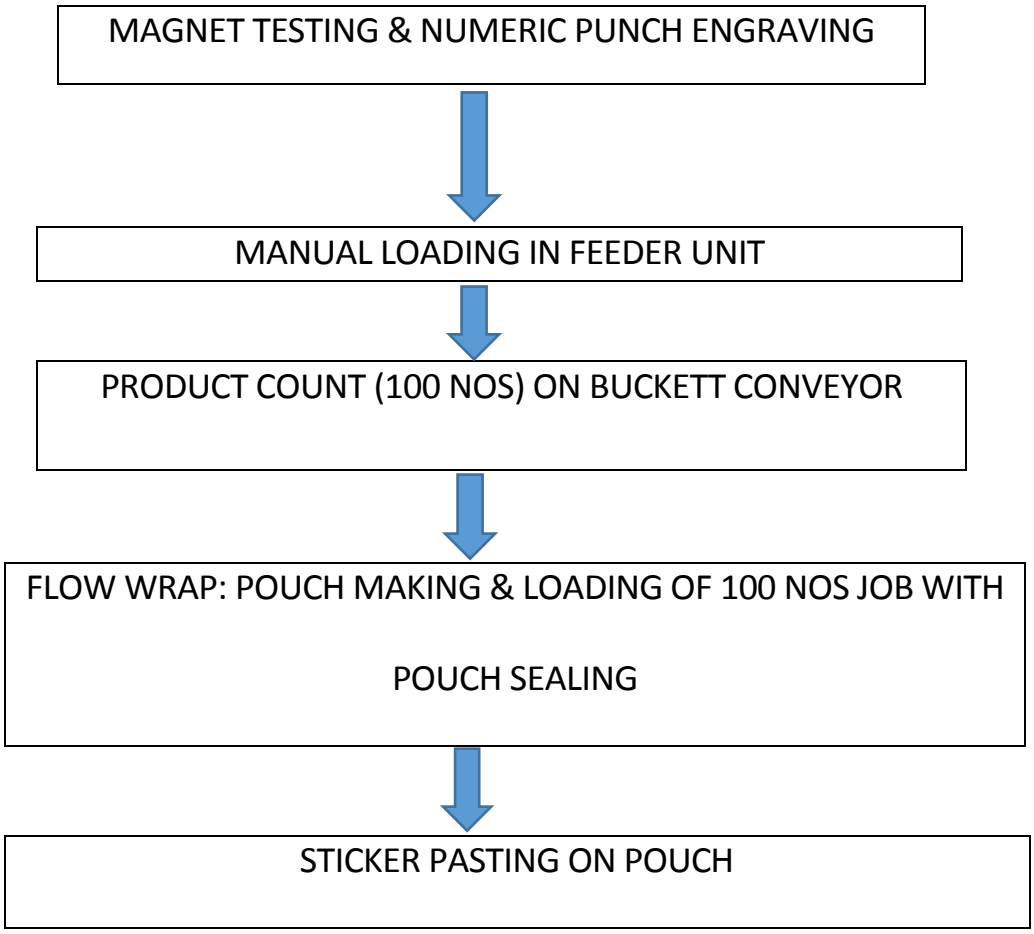

Product Details:

Details	
Pack size	40 x 35 x 10 mm L x B x H
Machine output	80 Pouches/min







NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Technical Specifications: - (Packaging line)

Sr No.	Packaging System Description	UNIT	QTY
1	Bowl Feeder		1 Nos
	• Dia	750mm	
	• height	650 mm	
	• Structure height	500 mm	
	• Construction	MS powder coated	
	• Contact Part	Zinc Plated	
2	Flat Belt Conveyor		1 Nos
	• Conv. Width	75 mm	
	• Conv. Length	1000 mm	
	• Construction	MS Powder Coated	
	• Contact Parts	Zinc Plated	
	• Motor	Bonfiglioli (IE2)	
3	Bucket Conveyor		1 Nos
	• Conveyor Width	250	
	• Length	1000mm	
	• Construction	MS Powder coated	
	• Contact Parts	Zinc Plated	
	• Motor	Bonfiglioli (IE2)	
4	Batching & Packing Machine		1 Nos
	• Machine Dimensions		
	• Width	1300	
	• Length	2500	
	• Conveyors in machine		
	• Width	250	
	• Construction	MS Powder Coated	
	• Contact Parts	Zinc Plated	
	• Pneumatics	SMC	
	• Motor	Bonfiglioli (IE2)	
5	Flat Belt Conveyor		1 Nos
	• Conveyor Width	500	
	• Length	500	
	• Construction	MS Powder coated	
	• Contact Part	Zinc Plated	
6	Ink Marking Machine with fixture		1 Nos
	• Make: Markal		
	• Fixture: Nihva		
7	Electrical Control Panel		1 Nos
	• Electrical VFD & All material Required: Siemens		
	• Field wire: Polycab		
	• Sensors: Keyance & Wenglor		

Images: -

1. **Bowl Feeder: -**




2. **Bucket Conveyor: -**



3. **Flat Belt Conveyor: -**



4. **Ink Marking Machine with fixture:-**

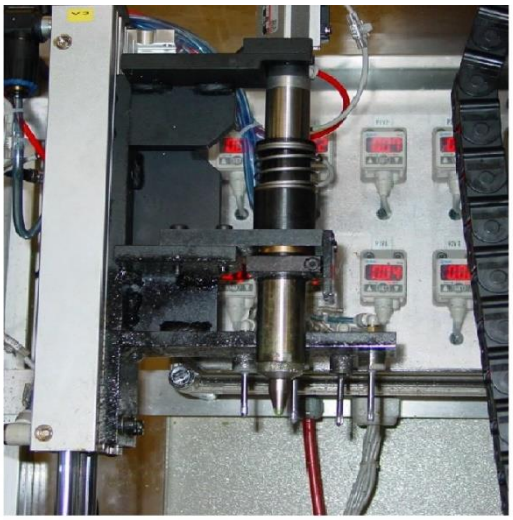

NIHVA
NIHVA TECHNOLOGIES PVT. LTD.

Commercial offer: -

Sr no	Description	Qty	Unit
1	Bowl feeder	1	Nos
2	Flat belt conveyor	1	Nos
3	Bucket Conveyor	1	Nos
4	Batching And packing machine	1	Nos
5	Flat belt conveyor	1	Nos
6	Ink Marking Machine with fixture	1	Nos
7	Electrical Control Panel	1	No
Cost of Project in INR		**22,95,000/-**	

GST PUNE: 27AAECN0437H1ZM

E. Drawings Training and warranty

- **Drawing:**

We will issue a full set of drawings for approval within 2 weeks of receiving the confirmed order and finalized design details.

- **Training:**

After installation of the Conveyor system, we will train the Clients personnel in the operation and basic maintenance, including the understanding of the error codes on the control system (if applicable).

- **Warranty:**

I. The warranty period is twelve months from the date of installation and commissioning.
II. If a defect arises within the warranty period stated, which is attributable to faulty design,
III. materials or installation workmanship the product will be repaired at our discretion without charge.
IV. This guarantee is subject to proper use of the product and assumes that the product is regularly serviced and maintained by skilled personnel in accordance with the operation and maintenance instructions supplied.

- **Maintenance & Service Agreement:**

I. We would suggest that you take advantage of a maintenance and service agreement on the NIHVA products, which will guarantee trouble free operation and speed of response in an emergency. Customized proposals are available on request.
II. We are pleased to inform that we also undertake AMC for all of our products & for any of your existing facilities.
III. Maintenance and service aren't about what you get. They're about what you avoid: failures, losses and unplanned interruptions.

- **Client Scope:**

1. Unloading from truck placement on site.
2. Exiting/Repair/ Modification/ Refurbishment charges will be extra

G. Terms and Conditions: -

1.	**Price**	: Ex. Works Pune
2.	**P & F**	: 3 % Extra at the time of delivery.
3.	**Freight Notes**	: Extra as applicable.
4.	**Delivery**	: Within 10- 12 weeks from date of receipt of confirmed purchase order, advance payment, drawing approval.
5.	**Payment Terms**	: 80% advance along with confirmed purchase order balance 20% before dispatch.
6.	**Insurance**	: Extra as applicable.
7.	**GST**	: As Applicable on total supply value.
8.	**Validity**	: 15 days from date of quotation.
9.	**Warranty**	: 12 months from date of supply.

Please feel free to contact **Mr. Ravi Ranjan Prashad - +91-7709586333** for any further clarification in this concern.

With Best Regards,
Pratiksha Prajapati
+91-7219207333
For NIHVA Technologies Pvt Ltd