


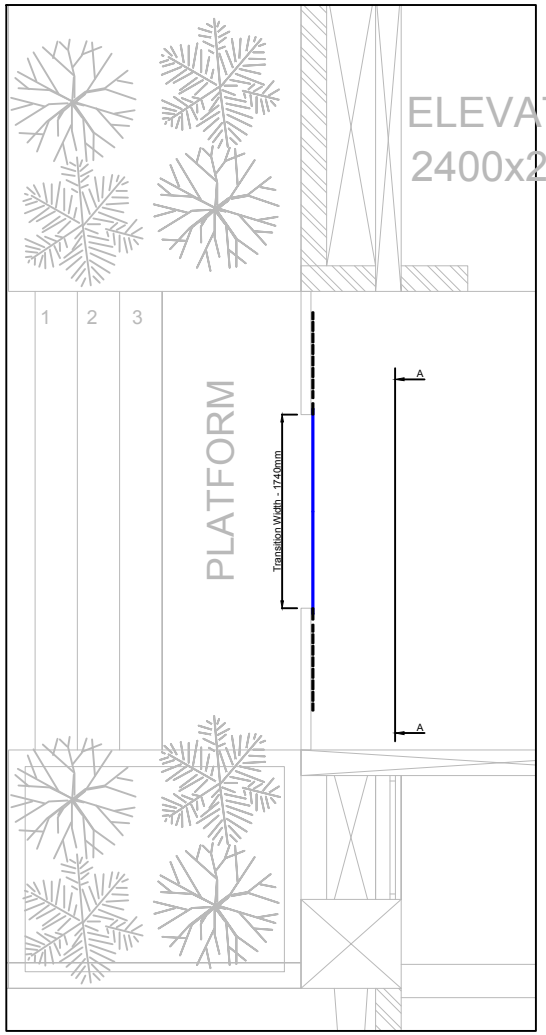


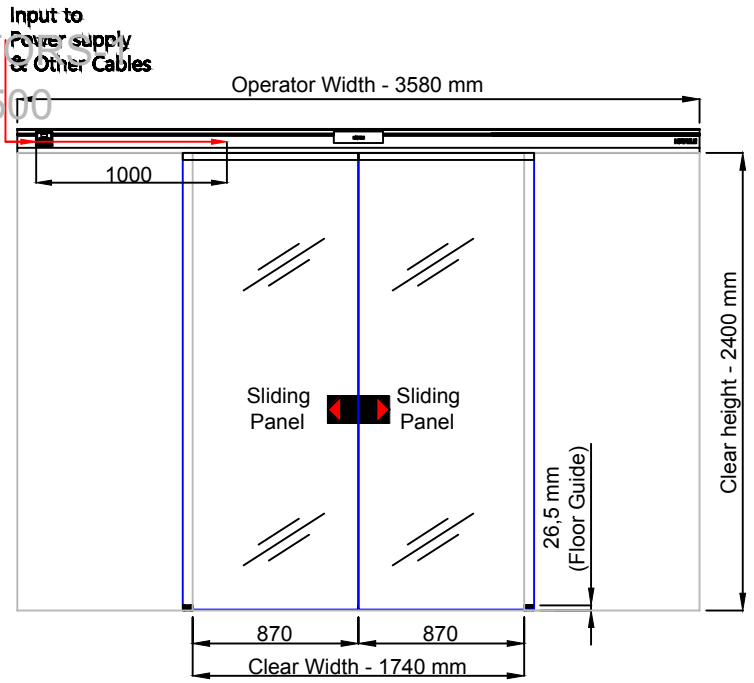

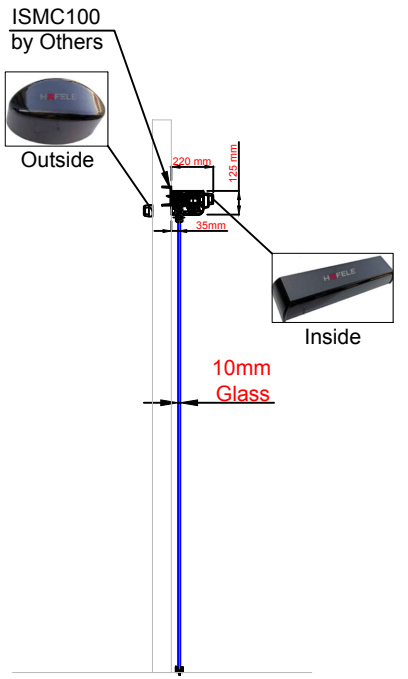

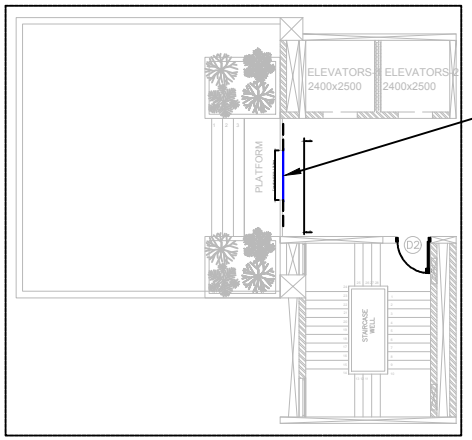

NOTES:

1. A SUITABLE, SAFE, COVERED & SECURED STORAGE AREA TO STORE THE MATERIALS MUST BE ARRANGED BY CLIENT FOR SAFE STORAGE UNTIL INSTALLATION.
2. FOR OPERATOR MOUNTING ON GLASS - GLASS TO BE PROVIDED WITH HOLES AS PER MOUNTED DETAILS.
3. FOR OPERATOR MOUNTING ON SUPPORT STRUCTURE - NIHVA WILL FIX THE OPERATOR ON THE PROVIDED SUPPORT STRUCTURE USING SELF THREADING SCREWS AS PER THE MOUNTING DETAILS.
4. SUITABLE SUPPORT STRUCTURE TO BE PROVIDED FOR MOUNTING OF OPERATOR, ACCESSORIES.(IN CLIENT SCOPE)
5. PROVIDED SUPPORT STRUCTURE SHOULD WITHSTAND THE STATIC & DYNAMIC LOAD OF OPERATOR, ACCESSORIES & SLIDING DOORS. (OPERATOR WEIGHT - ±50KGS, GLASS WEIGHT - AS PER SIZE)
6. ALL ELECTRICAL WIRING, INCLUDING SUPPLY & INSTALLATION OF ELECTRICAL SOCKETS 230 VOLTS, 50-60 Hz, UNINTERRUPTED POWER AS REQUIRED FOR THE PROPER INSTALLATION & WORKING OF THE SYSTEM IS TO BE PROVIDED BY OTHERS.
7. ALL CIVIL WORKS, STRUCTURAL WORKS, FALSE CEILING, WORK IN CLIENT SCOPE.
8. ALL NECESSARY SCAFFOLDING, CRANEAGE, FREE & UNINTERRUPTED ACCESS TO SITE & STORAGE ETC. TO BE PROVIDED BY YOU.

SPECIFICATIONS
Power - 170-260 V AC 50-60 Hz

This drawing & design is the property of NIHVA TECHNOLOGIES. Not to be sold or copied to any other concern.

TITLE	TELESCOPIC SLIDING DOOR			NIHVA TECHNOLOGIES PVT. LTD. PUNE Tel : 020 66304033 Email:- info@nihva.com Website:- www.nihva.com	
	NAME	SIGN	DATE		
DRAWN	S.M.S.		10.12.2020	CLIENT - SERUM INSTITUTE , PUNE	
CHECK				PROJECT - SERUM INSTITUTE , PUNE	
APPRD.				SITE LOCATION - PUNE	
If any queries contact : projectsupport@nihva.com				DWG. NO. : NIHVA/20-21/0106	REV- R00
ALL DIMENSION ARE IN mm				SCALE: NTS	WT: SHEET: