NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

NIHVA Sales Quotation

Thyssenkrupp Industries India Pvt. Ltd.
Pune

Date : 08.06.2022
Quote NO : AS_22.23.0006
Kind Attn : Mr. Bengali Khushrov
Email Id : khushrov.bengali@thyssenkrupp.com
Contact No: 98811 38106


Project Name & Location: Thyssenkrupp Industries India Pvt. Ltd. Pune


Subject : Commercial Offer for Safety Fencing

Dear Sir / Ma'am,

Thank you for your opportunity and trust shown on "NIHVA" your preferred partner for innovative solutions.
This has reference to your above mentioned requirement, please find below our Solutions.

Sr. No	Description	Pages
A.	Commercial Offer	1
B.	General Conditions	2
C.	Terms & Condtions	2

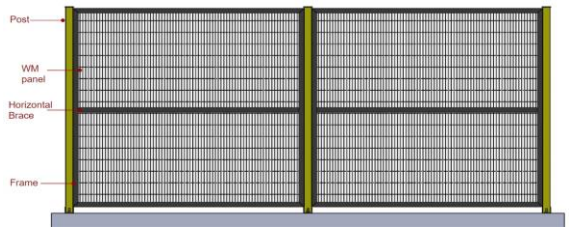



A) Commercial Offer

Sr No	Description	Qty	Supply Charges in INR		Installation Charges in INR	
		(Nos)	Unit Price	Total Amount	Unit Price	Total Amount
1	**Safety Fencing** (Perimeter- 40mtr as per layout) **A) Panel** • 1600 H X 1600 W mm • Frame Eq angle 40 X 40 X 4 mm • Wire mesh size 20 X 100 mm wire thickness 3 mm **B) Post** • Post height 1700 mm • Sq tube 60 X 60 X 2 mm • Base plate wedge shaped 5 mm • M12X200 Anchor Fastners (2 nos consider) **C) Manual Sliding Door - 2 Nos**	**1**	**6,85,000**	**6,85,000**	**35,000**	**35,000**
	Total Without Taxes			**6,85,000**		**35,000**
	GST Extra @ 18%		18%			**Extra At Actual**
	P&F Charges @ 3%		3%			**Extra At Actual**
	Transportation Charges					**Extra At Actual**
	Unloading Charges @ Site					**In Client Scope**

NIHVA Technologies Pvt. Ltd.
187, G-Block, 1st Floor, Above Renault Showroom, Thermax chowk, MIDC,
Chinchwad.
Pune – 411019

An ISO 9001:2015 Certified Company

GST Pune : 27AAECN0437H1ZM

B) General Conditions

1 Installation will start after receiving of site readiness photographs or written email communication.

2 We will mobilize the installation team in 3 - 4 working days, after reciept of site readiness confirmation

3 For any reason if we need to stop our installation and demobilize the team without completing the work, then extra cost will be applicable for remobilizing the team.

4 After 1 year warranty, Non comprehensive AMC will be provided by NIHVA at an additional cost.

Note: Please find below List which are in Client Scope

Sr. No		Remark
1	Secured and fully covered Store area to keep the material.	In Client Scope
2	Scaffolding/Hydra/Crane/Forklift etc - Required for Installation at Site.	In Client Scope
3	Electrical Supply on the site single phase/three phase points at different places.	In Client Scope
4	Any civil / masonry/structural work required.	In Client Scope
5	All structure support required.	In Client Scope
6	In Case of any changes in the layout as per site requirements after the shipment of material , the additional quantities and the wastage.	In Client Scope
7	Conduits, Cables required.	In Client Scope

C) Terms & Conditions

Price : Ex Works Pune.

Delivery : 8-10 weeks from the date of receipt of confirmed Purchase Order, Advance Payment & Drawing approval.

Payment : 70% Advance along with Confirmed Purchase Order.
25% before dispatch of material.
5% Against completion of Installation, Testing and Commissioning.

Validity : Validity of Offer is 15 days from the date of quotation.

Warranty : 12 months from the date of supply.

With Best Regards
Pratibha Mete
8530872333
For NIHVA Technologies Pvt Ltd